Photometric test report

Family
CITY-LIGHT 120 LED

Order number: 5XA5285KF14H + 5XA54000XS
EAN: 4058352835517 + 4050737730073

LP number
59087_78

Version	post-top- or mounting to wall arm, spreader element, structured
Optic	asymmetric, wide distribution (ST1.2a)
Cover	cover transparent, PMMA
Lamps	LED 4000 K | CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 1450 lm Power consumption = 10.0 W Luminous efficacy = 145 lm/W

serial documentation
08.07.2022

siteco

Luminous intensity in cd/klm

C180-0 C205-25 C210-30 C270-90

Imax: 584 cd/klm

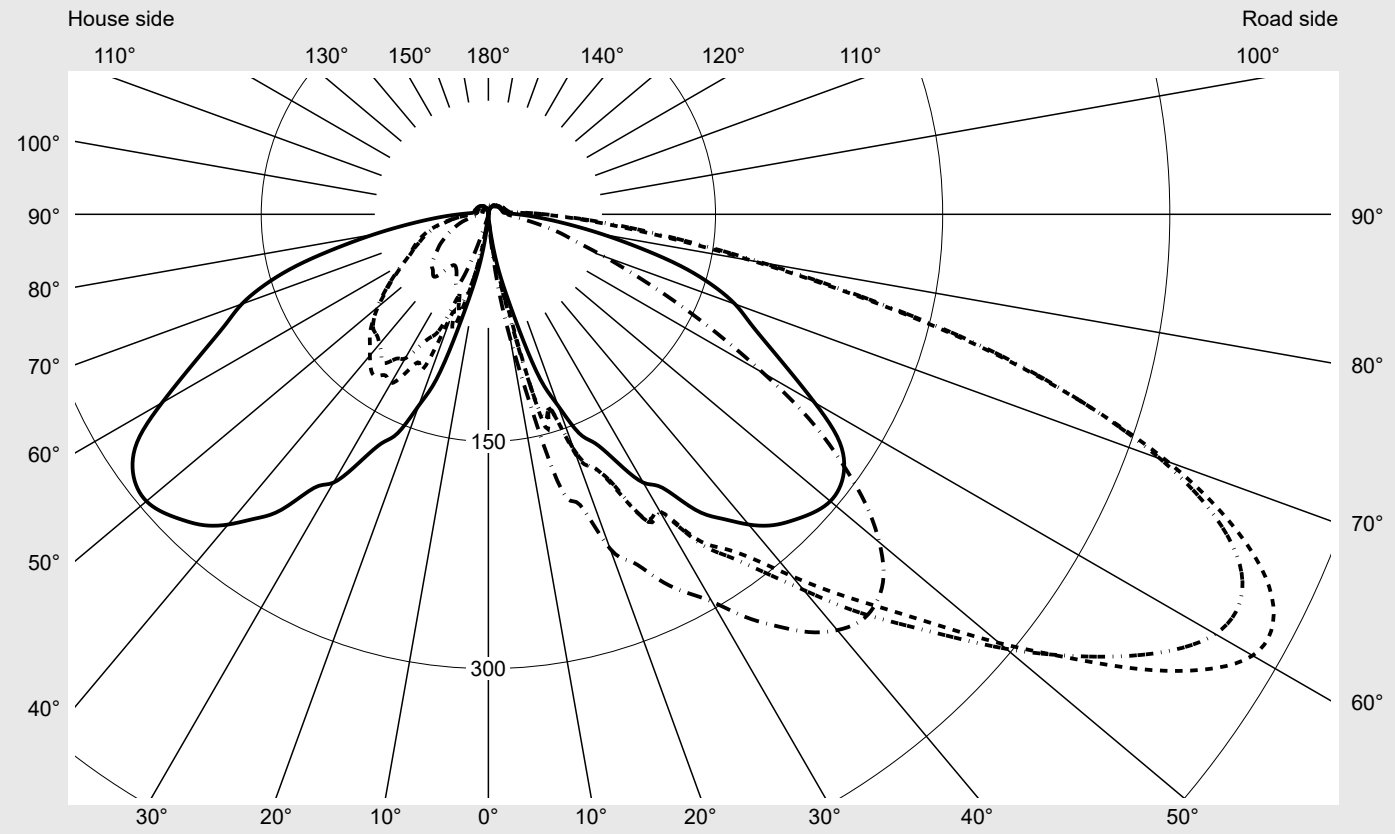

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.0%
Eta 90° - 180°	5.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	477.4
Imax 80°	183.2
Imax 90°	37.8
Imax >90°	25.1
Imax >95°	16.1

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

Envelope curve in cd/klm KMK 62,5° KMK 60° KMK 57,5° KMK 55°

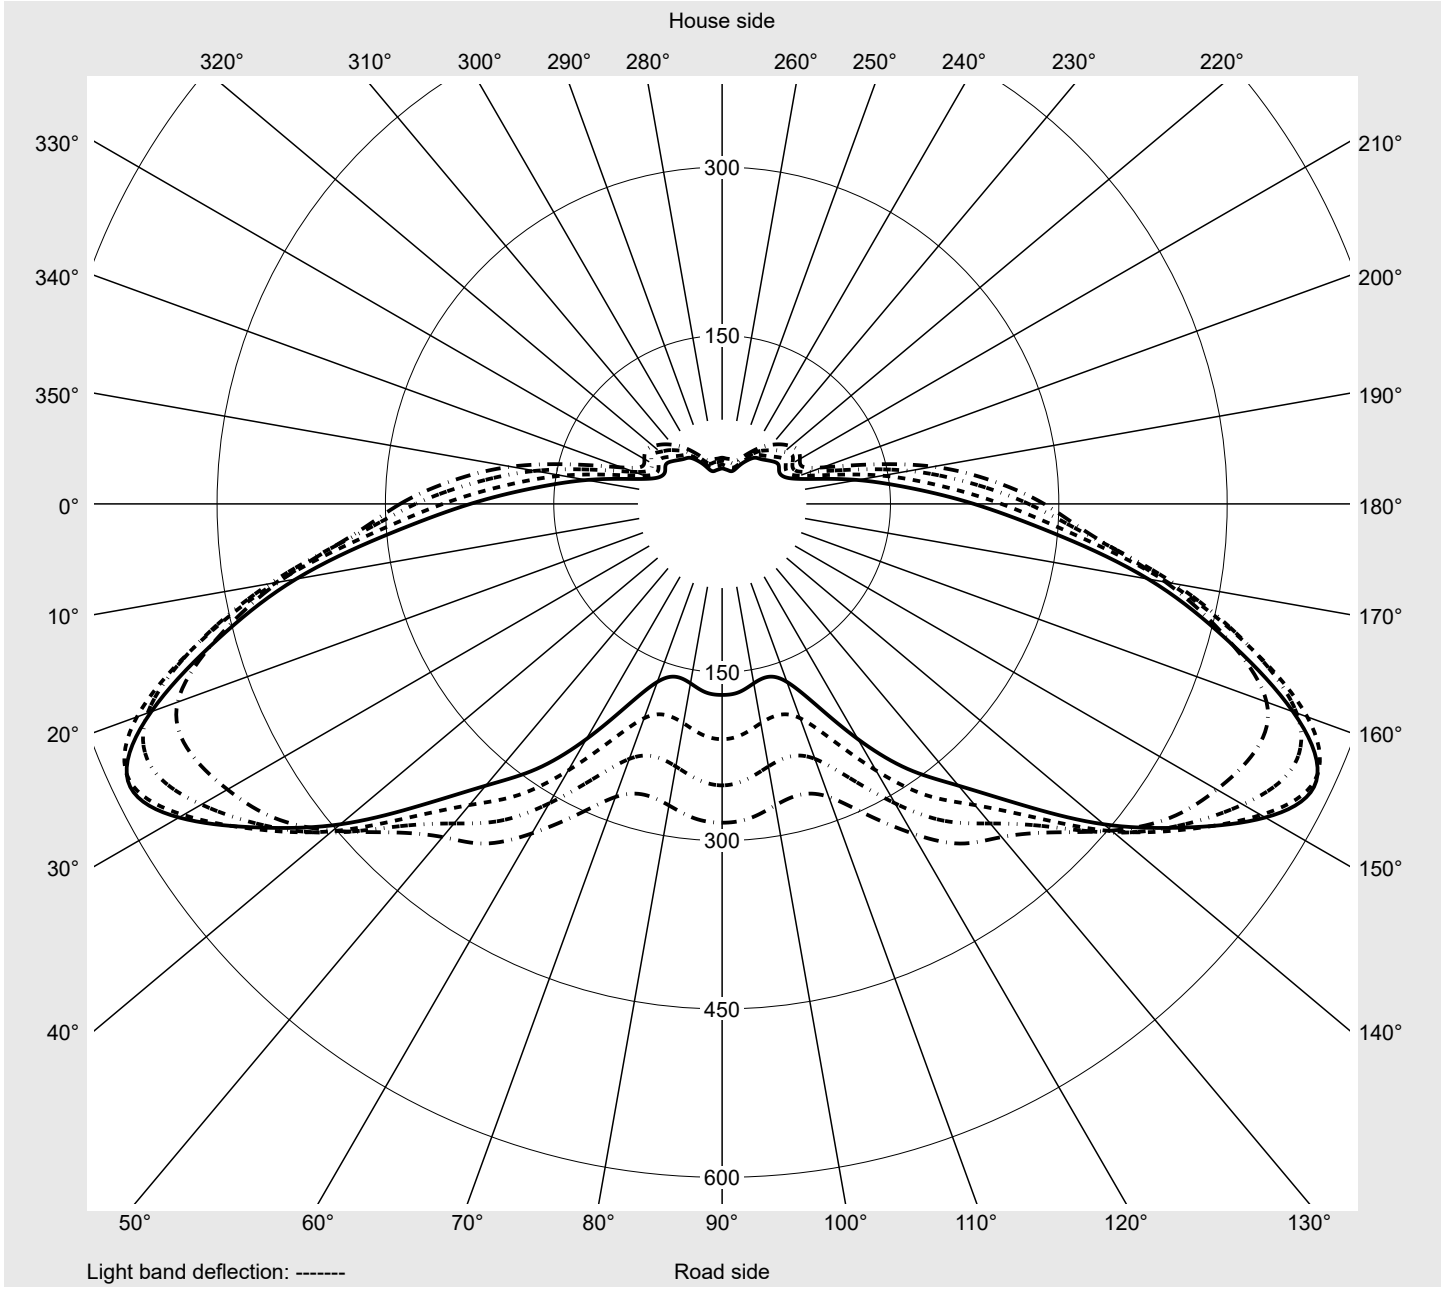

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
2,5°	1.1	1.4	1.4	1.7	1.7	1.7	1.7	1.7	1.7	2.0	2.0	2.0	2.0
5,0°	3.4	4.2	4.8	5.6	6.2	7.0	7.6	8.2	8.5	8.7	9.3	9.6	10.1
7,5°	16.1	19.2	21.7	23.7	25.4	26.8	27.9	28.5	29.6	30.2	31.6	32.7	34.7
10,0°	34.7	36.1	37.5	38.6	44.5	44.5	47.9	51.3	55.2	58.9	64.0	68.2	71.6
12,5°	53.3	63.1	67.9	65.9	71.0	78.1	85.7	95.0	101.7	102.0	103.7	104.5	106.8
15,0°	80.0	90.2	109.9	122.9	146.0	145.4	139.2	132.7	129.6	128.8	134.4	137.0	142.9
17,5°	114.4	111.9	120.3	130.2	139.5	133.6	134.7	143.2	148.5	149.1	158.1	162.9	171.0
20,0°	134.4	151.6	155.0	157.2	163.4	168.8	165.7	164.0	168.2	170.5	177.8	181.2	180.3
22,5°	156.4	153.9	166.5	184.3	184.6	180.6	181.8	184.6	184.3	178.1	182.0	192.5	204.3
25,0°	166.8	178.9	195.6	192.5	198.4	201.2	198.4	201.8	203.5	204.9	212.5	222.6	221.8
27,5°	184.9	199.8	207.4	202.6	213.6	227.4	229.1	232.5	233.6	231.1	235.0	245.2	248.0
30,0°	204.6	214.2	218.7	215.3	221.2	226.6	228.5	239.2	252.2	254.5	260.4	271.6	276.4
32,5°	214.2	219.0	231.6	232.5	242.3	253.1	255.9	268.0	280.9	282.9	291.7	305.5	308.0
35,0°	238.1	243.2	257.3	252.2	260.7	269.1	275.6	290.2	303.8	309.7	322.1	334.5	332.0
37,5°	253.3	259.3	270.2	269.7	278.1	286.6	297.3	311.4	326.3	334.2	347.7	359.6	356.5
40,0°	267.4	271.9	285.5	298.4	307.7	311.9	323.8	337.6	353.4	359.0	370.8	382.1	378.7
42,5°	278.4	287.1	305.5	322.9	333.4	339.3	353.9	366.0	378.2	383.5	392.3	400.4	393.4
45,0°	285.5	300.7	324.1	345.5	363.0	367.5	381.8	394.2	400.7	400.1	404.7	408.6	398.2
47,5°	291.4	312.8	344.6	374.2	396.2	401.0	412.3	421.0	420.7	410.6	408.9	408.6	396.5
50,0°	294.8	323.8	367.5	407.2	434.2	440.4	446.4	448.3	437.6	417.1	407.8	402.7	386.1
52,5°	293.3	330.5	386.6	437.6	474.3	480.5	478.5	470.0	448.6	417.6	400.7	389.4	366.9
55,0°	286.9	332.2	401.3	466.6	516.2	523.3	508.9	487.5	452.8	414.0	387.5	369.4	339.0
57,5°	273.1	329.1	409.2	485.0	544.7	559.6	535.7	499.1	455.7	406.1	371.7	344.6	308.0
60,0°	248.8	315.6	403.5	484.4	554.9	582.7	554.3	505.5	453.7	395.4	350.3	316.7	274.2
62,5°	224.3	295.6	385.5	465.0	541.3	584.2	558.8	502.7	444.1	379.9	327.7	288.3	242.1
65,0°	203.5	275.3	360.4	433.7	510.0	566.1	547.5	487.8	426.1	360.4	304.1	259.8	211.9
67,5°	186.8	258.7	334.5	397.9	467.5	529.5	518.5	456.5	395.6	332.8	278.4	230.5	182.3
70,0°	173.3	242.3	309.7	361.8	420.2	477.4	472.3	413.4	355.9	299.3	247.4	204.3	160.3
72,5°	154.7	217.8	274.7	317.6	363.0	409.7	410.3	360.7	307.2	256.4	215.9	188.5	136.7
75,0°	131.0	184.0	229.9	263.8	299.3	334.2	338.4	298.7	250.2	209.1	173.9	150.2	114.1
77,5°	102.3	141.5	175.6	201.5	226.3	250.2	254.7	225.4	187.4	156.1	138.4	127.1	103.1
80,0°	77.2	103.7	127.4	146.3	162.6	177.5	183.2	166.5	143.7	120.9	106.0	98.3	79.2
82,5°	56.1	73.3	88.8	101.4	111.3	121.2	127.9	121.7	107.4	89.0	74.7	67.3	52.1
85,0°	40.0	51.0	61.1	69.6	76.4	82.0	88.2	85.7	75.2	62.3	52.7	46.8	38.3
87,5°	28.2	35.2	42.0	47.6	52.1	55.0	58.0	56.9	50.7	44.0	38.6	34.9	29.9
90,0°	19.4	22.8	26.5	30.4	33.3	35.2	37.5	37.8	34.7	31.0	28.7	26.8	24.2
92,5°	13.8	15.2	16.9	18.9	20.6	22.0	24.2	25.1	24.2	22.8	22.0	21.4	20.6
95,0°	10.7	11.6	12.1	13.2	13.8	14.7	16.1	16.9	17.2	16.9	17.2	17.5	17.8
97,5°	9.9	10.4	10.7	11.0	11.3	11.8	12.1	12.7	13.2	13.5	13.8	14.7	15.2
100,0°	9.6	9.9	10.4	10.4	10.4	11.0	11.0	11.3	11.3	11.8	12.4	13.0	13.8
102,5°	9.3	9.9	9.9	10.4	10.4	10.4	10.4	10.7	11.0	11.3	11.6	11.8	12.7
105,0°	9.3	9.3	9.9	9.9	9.9	10.4	10.4	10.4	10.7	10.7	11.0	11.3	11.8
107,5°	9.3	9.3	9.6	9.9	9.9	9.9	10.1	10.4	10.4	10.4	10.7	11.0	11.3
110,0°	9.0	9.3	9.3	9.6	9.9	9.9	9.9	10.1	10.1	10.4	10.4	10.7	11.0
112,5°	8.7	9.0	9.3	9.3	9.3	9.9	9.9	9.9	9.9	10.1	10.1	10.4	10.7

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
2,5°	2.0	2.3	2.3	2.0	2.0	2.3	1.7	1.7	1.4	1.4	1.4	1.7	1.7
5,0°	10.1	10.7	11.0	11.0	11.0	11.3	3.1	2.5	2.3	2.0	2.0	1.7	2.0
7,5°	36.9	39.7	42.6	44.5	45.9	46.2	12.7	9.6	7.0	5.4	4.2	3.7	3.1
10,0°	74.4	78.1	80.6	81.4	82.6	83.4	32.7	32.1	30.4	25.6	19.4	13.5	9.0
12,5°	110.2	116.1	122.6	128.2	130.8	130.8	47.6	42.8	38.9	39.5	42.0	40.0	30.7
15,0°	151.0	160.9	169.1	180.6	187.1	189.9	74.7	70.4	63.7	63.7	60.9	54.7	50.4
17,5°	183.4	197.3	199.8	204.0	203.7	201.2	108.5	109.1	99.8	89.9	79.2	65.1	55.2
20,0°	185.4	196.7	210.8	224.9	233.0	235.0	122.0	118.9	98.3	81.2	69.0	57.2	48.2
22,5°	217.3	227.4	233.0	239.5	246.6	248.5	142.0	136.4	127.7	116.9	107.9	79.7	59.2
25,0°	232.8	244.3	252.5	261.2	265.2	266.0	156.1	148.2	130.8	118.4	108.2	89.3	67.3
27,5°	261.2	268.8	275.0	279.8	281.2	281.2	167.7	157.0	139.8	127.4	117.8	98.1	73.3
30,0°	289.7	292.8	295.3	296.7	296.7	295.3	182.6	163.4	144.6	135.5	128.8	109.9	86.5
32,5°	315.3	312.5	312.5	313.9	314.8	315.0	194.7	174.4	151.6	135.3	126.2	113.0	95.8
35,0°	337.0	331.7	330.5	331.1	331.4	332.0	219.8	191.6	163.2	143.7	130.2	120.0	111.0
37,5°	359.6	350.8	345.2	343.8	345.5	347.7	236.1	206.0	172.5	147.7	127.7	116.1	112.7
40,0°	375.9	361.5	352.2	351.4	355.6	358.4	246.6	214.2	177.2	146.5	121.7	111.9	111.0
42,5°	386.1	367.5	356.5	356.2	361.3	364.1	256.2	219.8	178.4	141.5	115.8	108.8	109.6
45,0°	387.7	365.8	354.5	355.1	359.9	362.4	262.6	222.3	177.0	135.8	110.5	107.4	108.5
47,5°	380.7	356.8	344.9	346.6	351.1	353.9	265.7	223.7	173.3	127.1	103.1	102.6	103.7
50,0°	363.8	338.2	326.0	328.9	334.8	337.0	264.0	220.1	166.0	117.8	95.2	95.8	97.5
52,5°	338.4	311.7	301.0	304.1	311.4	313.9	255.3	209.4	152.5	106.5	86.5	87.9	90.5
55,0°	305.5	277.8	268.3	272.8	281.2	284.0	240.4	191.1	135.5	95.0	78.9	80.0	82.8
57,5°	269.7	241.8	233.0	237.6	246.6	250.8	220.1	169.4	117.5	83.4	71.3	72.4	76.1
60,0°	231.9	203.2	194.7	198.4	206.3	209.7	192.5	144.8	99.8	73.5	64.8	65.4	68.2
62,5°	197.3	168.8	159.5	162.3	168.5	170.2	166.5	122.6	85.9	66.2	59.2	58.6	61.1
65,0°	166.8	138.1	127.7	129.6	135.3	135.3	145.4	105.7	76.6	61.1	55.5	54.4	55.2
67,5°	138.9	110.7	100.0	100.6	103.1	104.8	129.1	92.4	69.6	56.9	52.1	49.9	50.4
70,0°	116.1	88.8	77.8	76.9	78.3	81.2	115.8	83.1	63.7	53.3	48.8	46.2	45.4
72,5°	95.2	70.7	60.0	58.0	59.7	62.0	101.4	73.0	57.8	48.5	44.5	42.3	40.3
75,0°	78.9	56.9	47.3	45.1	47.1	50.7	86.2	62.8	51.0	43.7	40.3	38.0	35.8
77,5°	65.7	45.1	36.9	34.7	36.4	39.5	68.8	51.9	43.4	37.5	34.7	32.7	30.2
80,0°	51.3	35.2	28.7	27.3	27.9	29.3	53.5	41.7	36.1	31.6	29.3	27.6	25.4
82,5°	37.5	27.6	22.8	21.1	21.7	22.0	40.9	33.3	29.0	25.6	24.2	23.1	20.6
85,0°	29.6	22.5	18.9	17.2	17.2	17.5	31.0	25.9	23.4	21.1	19.7	18.6	16.9
87,5°	24.0	19.4	16.3	14.9	14.4	14.1	22.5	19.4	17.8	16.1	14.9	13.8	12.4
90,0°	20.6	17.5	15.8	14.4	13.2	13.0	16.3	14.7	13.2	12.1	11.0	10.1	9.3
92,5°	18.9	17.2	15.8	14.4	13.5	13.5	12.4	11.3	10.4	9.6	8.7	8.2	7.6
95,0°	17.5	16.9	15.8	14.4	13.8	13.5	10.1	9.6	9.0	8.2	7.9	7.3	6.8
97,5°	16.1	16.1	15.2	14.4	13.8	13.5	9.3	9.0	8.5	7.9	7.6	7.3	6.8
100,0°	14.7	14.9	14.4	13.8	13.2	13.0	9.3	8.7	8.5	7.9	7.3	7.0	6.8
102,5°	13.0	13.8	13.5	13.0	12.7	12.4	9.0	8.7	8.2	7.9	7.3	7.0	6.8
105,0°	12.4	12.4	12.4	12.4	11.8	11.8	8.7	8.7	8.2	7.9	7.3	7.0	6.8
107,5°	11.3	11.8	11.8	11.6	11.3	11.3	8.7	8.7	8.2	7.6	7.3	6.8	6.8
110,0°	11.0	11.3	11.3	11.3	11.3	11.3	8.7	8.5	8.2	7.6	7.3	6.8	6.8
112,5°	10.7	10.7	10.7	10.7	10.7	10.7	8.7	8.2	8.2	7.6	7.3	6.8	6.8

Photometric test report

Family
CITY-LIGHT 120 LED

Order number: 5XA5285KF14H + 5XA54000XS
EAN: 4058352835517 + 4050737730073

LP number
59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	**0.0**	**0.0**
2,5°	1.7	1.7	2.0	2.0	2.0	2.0	1.7	1.7	1.7	2.0	1.7	**0.0**	**0.0**
5,0°	2.0	2.0	2.0	2.0	2.0	2.0	1.7	1.7	2.0	1.7	1.7	**0.1**	**0.1**
7,5°	2.5	2.5	2.5	2.3	2.3	2.0	2.3	2.0	2.0	2.0	1.7	**0.6**	**0.8**
10,0°	5.9	4.5	3.4	3.1	2.8	2.5	2.3	2.3	2.3	2.0	2.3	**1.7**	**2.5**
12,5°	21.4	15.5	9.3	5.4	4.2	3.4	2.8	2.8	2.5	2.5	2.3	**3.5**	**6.0**
15,0°	49.0	44.0	33.5	26.2	18.0	9.3	5.9	4.5	3.9	3.7	3.4	**6.3**	**12.3**
17,5°	49.0	42.8	42.0	38.0	29.3	26.5	23.7	18.3	12.4	9.9	9.6	**8.7**	**21.1**
20,0°	43.4	41.4	39.5	34.7	34.9	34.7	32.1	32.1	31.8	31.8	31.0	**11.1**	**32.2**
22,5°	46.2	40.3	34.9	34.4	34.1	33.8	33.5	39.5	43.4	47.3	49.0	**14.0**	**46.2**
25,0°	53.5	40.0	35.2	33.8	34.1	36.1	37.2	40.9	44.2	50.4	50.7	**16.9**	**63.0**
27,5°	57.8	43.4	37.5	36.1	38.0	40.9	43.1	44.2	44.2	46.8	45.7	**20.2**	**83.2**
30,0°	75.2	61.4	51.0	45.4	42.8	43.7	43.7	41.7	42.0	43.4	42.3	**23.5**	**106.7**
32,5°	84.5	71.6	60.9	53.3	50.4	49.3	46.5	42.3	40.6	41.4	40.6	**27.3**	**133.9**
35,0°	103.1	87.6	72.7	62.6	55.8	52.4	47.9	43.7	41.7	42.3	41.1	**31.6**	**165.5**
37,5°	108.8	95.5	82.0	73.0	65.7	60.3	53.3	48.5	46.5	47.3	46.2	**35.7**	**201.2**
40,0°	107.4	95.0	82.6	73.8	67.3	62.6	56.9	54.1	53.0	54.4	53.5	**39.6**	**240.7**
42,5°	105.7	95.0	82.6	74.1	66.8	61.4	55.5	53.8	52.7	54.7	54.1	**43.2**	**284.0**
45,0°	105.1	95.0	83.4	74.4	66.2	60.0	54.1	52.1	50.7	52.1	51.9	**46.4**	**330.4**
47,5°	100.9	91.6	81.7	73.5	65.1	58.0	52.4	50.4	49.0	50.4	50.7	**49.1**	**379.5**
50,0°	94.1	87.1	78.1	69.6	62.0	54.7	49.3	47.6	46.5	47.3	47.9	**51.3**	**430.8**
52,5°	87.6	81.4	73.5	65.4	57.8	50.7	45.7	44.2	43.7	44.0	44.5	**52.6**	**483.4**
55,0°	80.0	75.0	68.8	62.0	54.4	47.3	42.0	40.6	40.6	40.6	41.1	**53.1**	**536.5**
57,5°	72.1	67.6	62.3	57.2	50.4	44.5	38.9	37.2	37.8	37.5	38.3	**52.7**	**589.2**
60,0°	64.8	60.0	56.4	53.3	47.3	41.1	35.5	33.5	33.8	34.1	34.9	**51.2**	**640.4**
62,5°	58.9	55.2	52.4	50.2	44.8	38.6	32.4	30.2	30.4	31.0	31.6	**48.9**	**689.3**
65,0°	53.8	51.0	48.5	47.1	42.8	36.6	29.9	26.8	27.3	27.9	28.7	**46.0**	**735.4**
67,5°	49.0	46.2	44.5	44.0	40.3	34.1	27.3	24.0	24.2	24.5	25.4	**42.5**	**777.9**
70,0°	44.2	41.4	40.0	39.7	37.5	31.6	25.1	21.7	21.7	22.0	22.5	**38.7**	**816.6**
72,5°	39.2	36.6	35.8	35.2	33.0	27.9	22.8	19.7	18.9	19.2	19.7	**34.1**	**850.7**
75,0°	34.1	31.8	31.0	30.4	27.9	23.4	19.2	17.2	16.3	16.3	16.9	**28.6**	**879.3**
77,5°	27.9	26.2	25.1	24.5	22.5	18.9	15.8	13.8	13.5	13.5	13.5	**22.6**	**901.9**
80,0°	22.8	21.4	20.3	19.4	17.8	15.5	13.0	11.6	11.0	11.0	11.3	**17.2**	**919.1**
82,5°	18.6	16.9	16.1	15.5	13.8	12.4	10.4	9.3	8.7	8.7	9.0	**12.6**	**931.6**
85,0°	14.9	13.8	12.7	12.1	11.0	9.3	8.5	7.6	7.0	6.8	6.8	**9.2**	**940.8**
87,5°	11.0	9.9	9.0	8.2	7.9	7.0	6.5	5.9	5.4	5.4	5.1	**6.6**	**947.4**
90,0°	8.5	7.6	7.0	6.5	5.9	5.6	5.1	5.1	4.5	4.5	4.5	**4.8**	**952.2**
92,5°	7.0	6.5	6.2	5.6	5.4	5.1	4.5	4.5	3.9	4.2	3.9	**3.6**	**955.8**
95,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	**3.0**	**958.8**
97,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	3.9	3.9	**2.7**	**961.4**
100,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	**2.5**	**963.9**
102,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	3.9	3.9	**2.4**	**966.3**
105,0°	6.2	5.9	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	**2.3**	**968.6**
107,5°	6.5	5.9	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	**2.2**	**970.8**
110,0°	6.2	5.9	5.6	5.6	5.1	5.1	4.5	4.5	4.2	4.2	3.9	**2.1**	**972.9**
112,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	4.2	3.9	**2.1**	**975.0**

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.7	9.0	9.0	9.3	9.3	9.6	9.6	9.6	9.9	9.9	10.1	10.1	10.1
117,5°	8.7	8.7	9.0	9.3	9.3	9.3	9.3	9.3	9.6	9.6	9.9	9.9	10.1
120,0°	8.5	8.7	8.7	9.0	9.0	9.0	9.3	9.3	9.3	9.3	9.6	9.6	9.9
122,5°	8.5	8.5	8.7	8.7	8.7	9.0	9.0	9.0	9.0	9.3	9.3	9.6	9.6
125,0°	8.2	8.5	8.5	8.7	8.7	8.7	9.0	9.0	9.0	9.0	9.0	9.3	9.3
127,5°	8.2	8.2	8.5	8.5	8.5	8.7	8.7	8.7	8.7	8.7	9.0	9.0	9.0
130,0°	7.9	7.9	8.2	8.5	8.2	8.5	8.5	8.5	8.5	8.7	8.7	8.7	9.0
132,5°	7.9	7.9	7.9	8.2	8.2	8.2	8.2	8.5	8.5	8.5	8.5	8.7	8.7
135,0°	7.3	7.6	7.9	7.9	7.9	7.9	8.2	8.2	8.2	8.2	8.2	8.5	8.5
137,5°	7.3	7.3	7.3	7.6	7.6	7.9	7.9	7.9	7.9	7.9	8.2	8.2	8.5
140,0°	6.8	7.0	7.3	7.3	7.3	7.6	7.6	7.6	7.6	7.9	7.9	7.9	7.9
142,5°	6.8	6.8	7.0	7.0	7.3	7.3	7.3	7.3	7.3	7.3	7.6	7.9	7.9
145,0°	6.8	6.8	6.8	6.8	7.0	7.0	7.3	7.3	7.3	7.3	7.3	7.3	7.6
147,5°	6.2	6.8	6.8	6.8	6.8	6.8	6.8	7.0	7.3	7.3	7.3	7.3	7.3
150,0°	6.2	6.2	6.2	6.8	6.8	6.8	6.8	6.8	6.8	6.8	7.0	7.0	7.3
152,5°	6.2	6.2	6.2	6.2	6.2	6.2	6.8	6.8	6.8	6.8	6.8	6.8	6.8
155,0°	5.6	5.6	5.6	5.9	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.5	6.8
157,5°	5.1	5.1	5.4	5.6	5.6	5.6	5.6	5.6	5.6	5.6	6.2	6.2	6.2
160,0°	4.5	4.8	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.6	5.6	5.6
162,5°	3.9	3.9	4.2	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.8	5.1
165,0°	3.4	3.4	3.4	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9
167,5°	2.8	2.8	2.8	2.8	2.8	3.1	3.1	3.1	3.1	3.1	3.4	3.4	3.4
170,0°	2.3	2.3	2.3	2.3	2.3	2.5	2.3	2.3	2.3	2.3	2.3	2.5	2.3
172,5°	2.3	2.0	2.3	2.3	2.3	2.0	2.3	2.3	2.0	2.0	2.3	2.3	2.3
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
177,5°	1.4	1.1	1.4	1.4	1.4	1.1	1.4	1.1	1.1	1.1	1.4	1.7	1.7
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.1	10.4	10.4	10.1	10.7	10.7	8.7	8.2	7.9	7.6	7.3	7.0	6.8
117,5°	10.1	10.1	10.1	10.1	10.1	10.1	8.2	8.2	7.9	7.6	7.3	6.8	6.8
120,0°	9.9	10.1	10.1	10.1	10.1	10.1	8.5	8.2	7.9	7.6	7.3	7.0	6.8
122,5°	9.6	9.6	9.6	9.6	9.6	9.6	8.2	8.2	7.9	7.3	7.3	7.0	6.8
125,0°	9.6	9.6	9.6	9.6	9.6	9.6	8.2	7.9	7.6	7.3	7.3	6.8	6.8
127,5°	9.0	9.0	9.3	9.3	9.3	9.6	7.9	7.9	7.6	7.3	7.0	6.8	6.8
130,0°	9.0	9.0	9.0	9.0	9.0	9.0	7.9	7.6	7.6	7.3	7.0	6.8	6.5
132,5°	8.7	9.0	9.0	9.0	9.0	9.0	7.6	7.3	7.3	7.0	6.8	6.8	6.2
135,0°	8.5	8.5	8.5	8.5	8.5	8.5	7.3	7.3	7.0	6.8	6.8	6.5	6.2
137,5°	8.5	8.5	8.5	8.5	8.5	8.5	7.0	6.8	6.8	6.5	6.5	6.2	6.2
140,0°	7.9	7.9	7.9	7.9	7.9	7.9	6.8	6.8	6.5	6.2	6.2	5.9	5.6
142,5°	7.9	7.9	7.9	7.9	7.9	7.9	6.8	6.5	6.5	6.2	6.2	5.9	5.6
145,0°	7.6	7.6	7.9	7.6	7.9	7.3	6.5	6.5	6.2	6.2	5.9	5.6	5.6
147,5°	7.3	7.3	7.3	7.3	7.3	7.3	6.2	6.2	6.2	6.2	5.9	5.6	5.6
150,0°	7.3	7.3	7.3	7.3	7.3	7.3	6.2	6.2	6.2	5.9	5.6	5.6	5.6
152,5°	6.8	6.8	6.8	6.8	6.8	6.8	6.2	5.9	5.6	5.6	5.6	5.6	5.6
155,0°	6.8	6.8	6.8	6.8	6.8	6.8	5.6	5.6	5.6	5.6	5.6	5.4	5.4
157,5°	6.2	6.2	6.2	6.2	6.2	6.2	5.1	5.1	5.1	5.1	5.1	5.1	5.4
160,0°	5.6	5.6	5.6	5.6	5.6	5.6	4.5	4.5	4.5	4.5	4.8	5.1	5.1
162,5°	5.1	5.1	5.1	5.1	5.1	5.1	3.9	3.9	3.9	3.9	3.9	3.9	4.2
165,0°	3.9	3.9	4.2	3.9	3.9	3.9	3.4	3.4	3.4	3.4	3.4	3.4	3.4
167,5°	3.4	3.4	3.4	3.4	3.4	3.4	2.8	2.8	2.8	2.8	2.8	2.8	2.8
170,0°	2.8	2.5	2.5	2.5	2.5	2.8	2.3	2.3	2.3	2.3	2.3	2.3	2.3
172,5°	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.0	1.7	1.7	1.7	1.7	1.7
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
177,5°	1.4	1.4	1.4	1.7	1.4	1.7	1.1	1.1	1.1	1.1	1.1	1.1	1.4
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.5	4.5	4.5	**2.0**	**977.0**
117,5°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.5	4.5	4.5	4.5	**1.9**	**978.9**
120,0°	6.5	6.2	5.6	5.6	5.4	5.1	5.1	4.5	4.5	4.5	4.5	**1.9**	**980.7**
122,5°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.5	4.5	4.5	4.5	**1.8**	**982.5**
125,0°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.8	4.5	4.5	4.5	**1.7**	**984.2**
127,5°	6.2	6.2	5.6	5.6	5.4	5.1	5.1	4.8	4.5	4.5	4.5	**1.6**	**985.9**
130,0°	6.2	5.9	5.6	5.6	5.4	5.1	5.1	5.1	4.5	4.5	4.5	**1.5**	**987.4**
132,5°	6.2	5.9	5.6	5.6	5.4	5.1	5.1	4.8	4.5	4.5	4.5	**1.5**	**988.9**
135,0°	5.9	5.9	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	**1.4**	**990.2**
137,5°	5.6	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	**1.3**	**991.5**
140,0°	5.6	5.4	5.4	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	**1.2**	**992.7**
142,5°	5.6	5.4	5.1	5.1	5.1	4.5	4.5	4.5	4.5	4.5	4.5	**1.1**	**993.8**
145,0°	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	**1.0**	**994.8**
147,5°	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	**0.9**	**995.7**
150,0°	5.6	5.4	5.1	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	**0.8**	**996.5**
152,5°	5.4	5.4	5.1	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	**0.8**	**997.3**
155,0°	5.4	5.4	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	4.5	**0.7**	**997.9**
157,5°	5.6	5.4	5.4	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	**0.6**	**998.5**
160,0°	5.4	5.1	5.1	4.8	4.8	4.5	4.5	4.5	4.5	4.2	3.9	**0.5**	**999.0**
162,5°	4.2	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	**0.4**	**999.3**
165,0°	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	**0.3**	**999.6**
167,5°	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.5	2.8	2.8	2.8	**0.2**	**999.8**
170,0°	2.3	2.5	2.5	2.5	2.5	2.3	2.3	2.3	2.3	2.3	2.3	**0.1**	**999.9**
172,5°	2.0	2.0	2.0	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	**0.1**	**999.9**
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	**0.0**	**1000.0**
177,5°	1.4	1.1	1.4	1.7	1.7	1.4	1.4	1.7	1.7	1.7	1.7	**0.0**	**1000.0**
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	**0.0**	**1000.0**

Photometric test report

Family	Order number: 5XA5285KF14H + 5XA54000XS	LP number
CITY-LIGHT 120 LED	EAN: 4058352835517 + 4050737730073	59087_78

siteco

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1450	10.0	10.4	10.2
95	241	252	1376	9.5	9.9	9.7
90	229	250	1307	9.0	9.3	9.2
85	216	248	1233	8.5	8.8	8.6
80	203	246	1159	8.0	8.3	8.2
75	190	243	1085	7.6	7.7	7.6
70	178	241	1016	7.1	7.3	7.2
65	165	238	942	6.6	6.8	6.7
60	152	235	868	6.1	6.4	6.2
55	140	232	799	5.7	5.9	5.8
50	127	229	725	5.3	5.5	5.4
45	114	225	651	4.8	5.0	4.9
40	102	221	582	4.4	4.6	4.5
35	89	216	508	4.0	4.1	4.0
30	76	210	434	3.6	3.7	3.6
30	75	209	428	3.5	3.7	3.6