


# Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>  	<b>Order number:</b> 5XA5415EF14H + 5XA54000XBL <b>EAN:</b> 4058352636411 + 4050737971421	<b>LP number</b> <b>59088_44</b>
	<b>Version</b> post-top- or mounting to wall arm, shielding on building side <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1530 lm Power consumption = 10.5 W Luminous efficacy = 145.7 lm/W	<b>serial documentation</b> <b>08.07.2022</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 757 cd/klm**

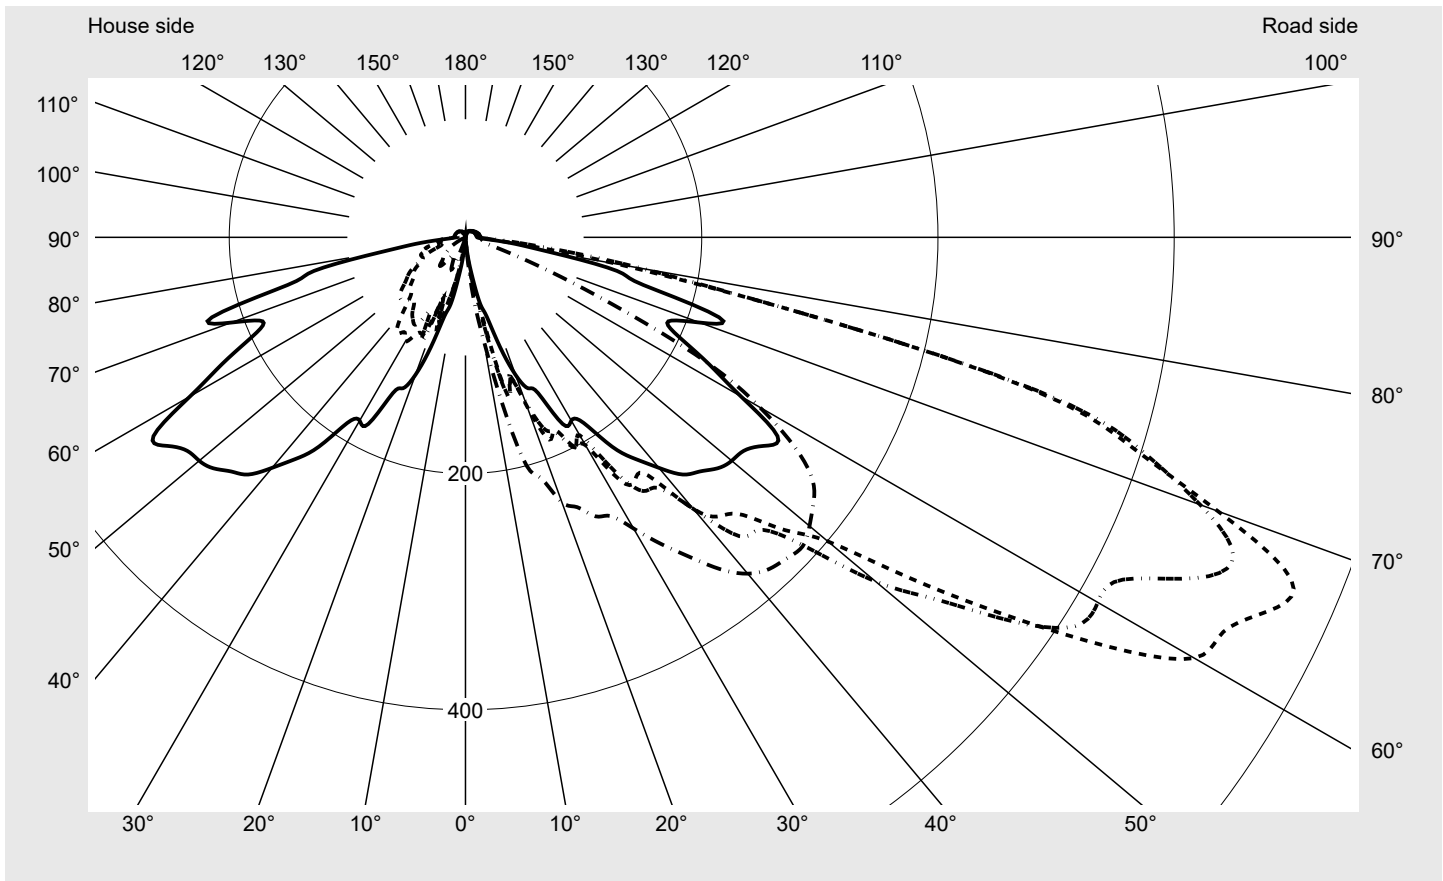

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.7%
Eta 90° - 180°	4.3%


Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	678.0
Imax 80°	152.2
Imax 90°	12.8
Imax >90°	12.8
Imax >95°	12.3

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> LITEPOLE 1	<b>Order number:</b> 5XA5415EF14H + 5XA54000XBL <b>EAN:</b> 4058352636411 + 4050737971421	<b>LP number</b> 59088_44
-----------------------------	--	------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**    **siteco**

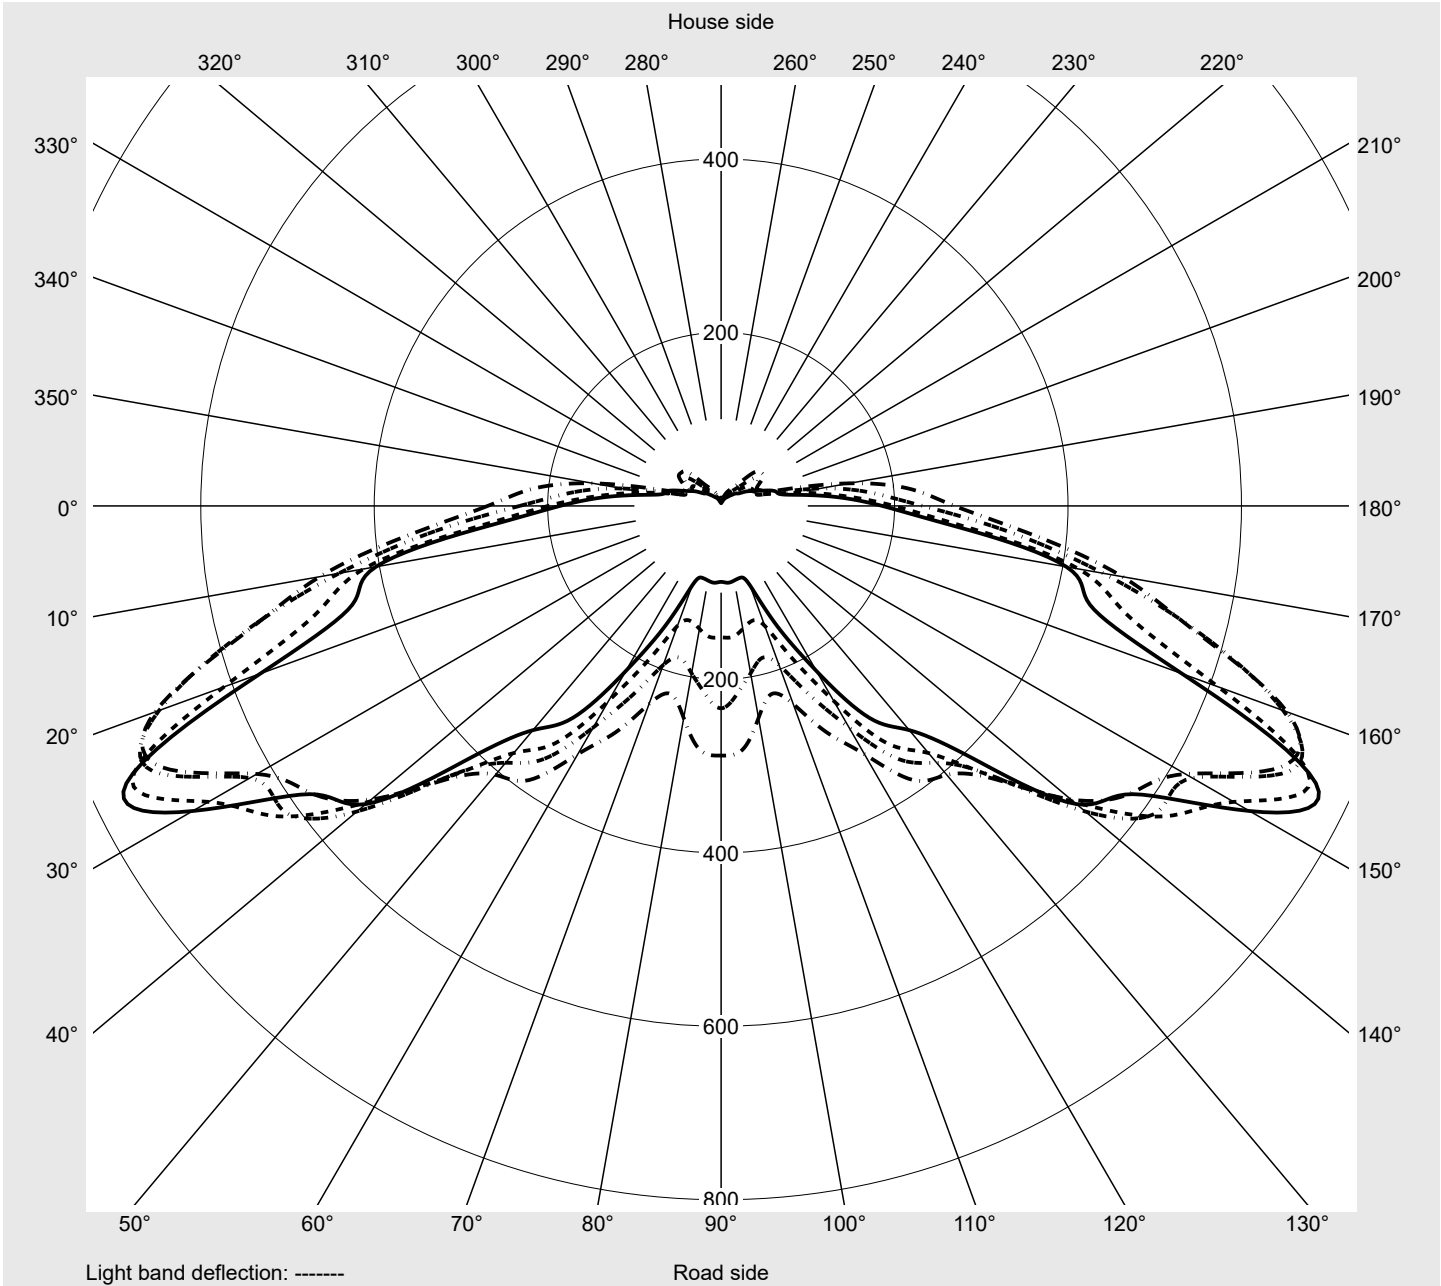

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
2,5°	1.3	1.3	1.3	1.3	1.6	1.9	1.9	1.9	2.1	2.1	2.1	2.4	2.1
5,0°	3.7	4.5	5.3	6.1	7.2	8.0	9.1	9.9	10.4	10.9	11.7	12.6	12.6
7,5°	19.0	21.6	23.0	24.0	25.1	27.5	28.6	30.4	31.5	32.8	34.4	37.1	40.1
10,0°	35.5	37.1	38.2	40.6	42.2	45.9	49.1	53.1	57.4	63.3	68.1	72.9	75.0
12,5°	57.9	56.1	62.7	61.4	66.2	78.8	88.9	98.3	106.8	111.6	109.5	106.8	109.2
15,0°	69.4	83.8	111.9	130.3	122.0	139.1	139.9	145.5	159.1	149.8	135.4	132.7	138.0
17,5°	97.5	90.0	105.2	117.8	118.3	123.4	126.0	146.3	162.9	180.0	173.8	158.9	168.0
20,0°	123.9	134.6	144.2	146.1	154.9	152.2	147.7	149.5	159.9	170.4	168.0	168.8	171.4
22,5°	138.3	138.3	164.5	165.8	167.4	185.3	176.2	163.4	158.1	157.5	165.3	184.0	198.4
25,0°	145.5	151.1	157.8	160.7	170.1	180.0	182.6	193.3	185.0	190.4	189.8	207.5	218.2
27,5°	178.1	161.3	176.2	184.2	187.7	200.0	200.5	217.4	223.2	221.6	206.7	217.9	234.7
30,0°	179.2	182.1	206.7	207.2	196.3	203.2	193.6	215.5	241.4	260.9	247.8	248.6	263.0
32,5°	186.4	188.2	213.1	216.0	217.4	244.1	234.2	241.9	256.3	283.0	297.2	298.3	292.6
35,0°	216.3	206.7	226.7	220.8	220.3	250.5	262.2	273.2	282.5	300.4	321.0	339.4	320.2
37,5°	236.6	242.2	262.2	258.7	243.8	254.2	267.3	292.4	316.1	329.2	335.4	373.8	361.5
40,0°	254.7	248.6	266.7	271.8	279.6	300.1	300.1	308.1	341.5	373.3	364.5	392.5	393.6
42,5°	272.4	256.1	274.0	283.3	294.0	319.9	343.1	345.5	355.7	403.5	404.0	406.9	412.8
45,0°	280.4	265.4	299.6	316.7	325.2	332.4	350.6	381.6	398.7	418.7	429.9	428.3	424.0
47,5°	289.4	286.0	350.1	381.6	370.4	366.9	383.7	402.1	429.9	433.6	440.6	448.1	436.0
50,0°	294.3	300.7	399.7	419.5	450.2	400.5	453.4	458.7	436.8	435.0	447.5	451.5	431.5
52,5°	296.9	303.6	402.1	426.4	504.9	473.4	504.1	515.6	461.1	432.8	449.4	456.9	427.0
55,0°	307.9	321.0	398.7	468.3	562.6	556.7	567.4	542.8	492.4	447.5	449.4	451.3	402.9
57,5°	313.2	353.3	434.7	515.9	644.0	644.6	612.3	545.5	508.9	454.5	435.0	428.3	378.4
60,0°	269.2	354.3	469.9	569.8	694.5	712.4	618.1	577.3	526.6	445.1	404.8	385.8	330.6
62,5°	232.3	330.3	447.3	574.1	689.7	723.3	627.5	614.7	548.2	439.0	386.6	356.2	295.1
65,0°	199.5	285.4	418.7	484.6	610.1	749.2	682.5	624.0	530.8	440.3	372.0	334.3	259.5
67,5°	185.8	271.8	404.3	440.3	565.5	756.7	703.6	579.4	534.8	413.1	337.5	298.5	219.8
70,0°	210.9	306.0	421.9	460.1	527.6	678.0	661.9	552.2	482.5	377.8	302.5	259.8	180.0
72,5°	225.1	336.4	413.6	448.9	519.6	592.2	600.0	483.8	374.1	310.5	248.1	209.9	143.9
75,0°	155.9	297.7	367.9	384.0	452.9	494.8	500.4	358.3	260.1	212.0	193.1	175.2	123.9
77,5°	131.4	197.1	227.0	266.7	281.4	276.4	276.4	191.7	156.5	148.7	146.6	144.7	104.4
80,0°	74.8	89.7	107.9	148.5	140.7	132.7	152.2	137.8	112.1	83.8	68.6	75.0	43.8
82,5°	42.7	49.9	55.3	80.9	69.7	52.6	74.0	94.8	70.0	47.0	31.2	20.8	15.2
85,0°	18.4	21.9	22.7	27.2	21.9	24.6	34.7	37.1	20.3	21.4	14.7	14.2	13.6
87,5°	11.2	11.5	12.6	13.4	13.6	15.8	14.7	15.0	13.4	13.1	12.8	12.8	12.8
90,0°	9.9	10.4	10.9	11.5	12.0	12.0	12.3	12.6	12.6	12.3	12.3	12.3	12.3
92,5°	9.6	10.1	10.7	11.2	11.5	11.7	12.0	12.3	12.3	12.3	12.3	12.3	12.0
95,0°	9.3	9.9	10.4	10.7	11.2	11.5	11.7	11.7	11.7	11.7	12.0	12.0	12.0
97,5°	9.3	9.6	10.1	10.7	10.9	11.2	11.5	11.7	11.7	11.7	11.7	12.0	12.0
100,0°	9.1	9.6	10.1	10.4	10.7	11.2	11.5	11.5	11.5	11.5	11.5	11.5	11.5
102,5°	9.1	9.3	9.6	10.1	10.7	10.7	11.2	11.2	11.2	11.2	11.5	11.5	11.5
105,0°	9.1	9.1	9.6	10.1	10.1	10.7	10.9	10.9	10.9	10.9	10.9	10.9	11.2
107,5°	8.8	8.8	9.1	9.6	10.1	10.4	10.4	10.7	10.7	10.7	10.9	10.9	10.9
110,0°	8.8	8.8	9.1	9.3	9.6	9.9	10.1	10.4	10.4	10.4	10.4	10.4	10.4
112,5°	8.5	8.8	8.8	9.1	9.3	9.6	9.9	9.9	9.9	10.1	10.4	10.4	10.4

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
2,5°	2.4	2.4	2.4	2.1	2.4	2.1	1.3	1.3	1.3	1.3	1.3	1.3	1.6
5,0°	12.6	12.6	12.8	13.1	13.1	12.8	3.2	2.7	2.1	2.1	1.9	1.9	1.9
7,5°	41.9	45.1	47.0	48.9	50.5	51.3	15.5	12.0	8.8	6.7	4.8	3.5	2.9
10,0°	77.7	80.9	80.6	82.0	86.5	88.1	33.4	33.6	31.8	26.4	18.7	12.6	8.0
12,5°	115.1	120.7	122.6	129.0	137.5	144.7	63.6	43.0	41.1	37.4	37.9	37.9	30.7
15,0°	146.1	154.9	162.6	177.0	196.0	200.3	64.6	55.8	63.8	57.1	56.9	58.7	50.5
17,5°	180.5	192.3	196.0	206.9	214.1	214.1	98.3	91.9	86.0	86.8	81.2	74.5	65.4
20,0°	179.4	196.3	208.8	227.2	236.3	238.7	126.3	107.6	87.0	65.7	54.7	48.9	55.8
22,5°	216.5	218.2	225.4	240.8	245.1	247.3	135.1	121.2	114.3	100.9	83.3	95.1	55.8
25,0°	235.0	238.7	243.5	255.8	259.0	260.6	133.0	119.6	108.7	96.7	89.5	71.8	60.3
27,5°	260.6	262.7	264.9	268.1	269.4	265.9	159.1	127.6	110.5	100.9	93.7	76.9	55.8
30,0°	293.7	288.9	281.4	283.3	287.0	284.6	179.4	154.6	127.9	107.3	101.7	85.4	58.7
32,5°	323.1	316.1	301.5	302.8	307.9	307.6	170.6	147.4	130.3	105.5	95.6	82.8	60.9
35,0°	338.6	341.8	324.7	322.3	329.8	330.0	203.5	161.0	139.9	119.6	99.3	78.5	75.3
37,5°	362.3	361.0	338.6	337.0	347.7	354.1	229.9	178.4	143.7	122.0	94.3	71.6	78.2
40,0°	382.6	374.4	347.4	346.3	359.4	371.7	234.4	187.7	151.7	121.5	81.7	69.2	78.8
42,5°	400.8	376.2	352.7	357.5	368.7	380.8	260.1	198.1	160.5	119.9	70.0	71.6	82.0
45,0°	420.5	376.5	359.9	369.3	376.0	384.5	283.6	209.9	163.7	113.7	64.9	75.3	85.2
47,5°	425.4	372.2	359.4	369.8	378.9	387.2	292.6	215.2	165.8	99.6	63.8	75.0	83.6
50,0°	415.7	361.0	351.7	360.2	376.5	380.2	295.1	218.4	168.0	78.8	59.5	71.6	80.1
52,5°	384.2	342.3	342.0	350.6	367.4	371.2	290.5	215.7	160.5	61.7	55.3	65.4	73.4
55,0°	346.9	316.7	314.8	329.5	353.0	358.9	287.8	209.3	143.7	53.7	53.1	60.6	68.4
57,5°	315.3	279.0	277.4	298.3	327.6	330.6	273.2	184.2	107.3	54.7	51.0	56.6	65.7
60,0°	288.1	243.0	224.6	248.3	282.2	287.8	220.3	150.1	71.0	51.3	45.7	50.5	59.5
62,5°	239.8	195.2	181.6	196.0	216.8	233.4	174.1	115.6	52.1	44.1	41.1	43.0	51.8
65,0°	193.9	147.1	137.2	143.9	151.7	151.7	137.8	88.1	52.9	44.9	40.1	38.7	39.8
67,5°	152.7	97.7	85.7	87.3	88.9	87.6	126.3	75.0	64.9	51.5	40.6	33.4	25.4
70,0°	124.7	75.0	51.0	45.9	43.8	45.4	137.5	79.8	70.2	48.6	38.7	25.6	18.7
72,5°	91.6	62.2	33.6	23.8	23.0	22.4	132.4	79.3	64.6	43.3	32.6	21.4	16.6
75,0°	69.2	36.0	23.8	17.6	16.8	16.6	77.7	64.1	53.9	35.8	34.7	23.0	16.6
77,5°	47.0	22.2	17.4	15.2	15.2	15.5	64.1	49.1	42.7	34.2	28.6	22.4	16.3
80,0°	21.4	15.2	14.4	14.2	14.4	14.4	50.7	43.8	40.1	31.5	25.4	23.0	17.6
82,5°	14.2	13.4	13.1	13.4	13.6	13.9	33.9	32.8	31.8	24.0	21.4	17.6	14.2
85,0°	13.1	12.8	12.8	13.1	13.4	13.4	17.9	19.8	24.0	23.0	20.0	16.3	12.6
87,5°	12.6	12.6	12.6	12.6	12.8	12.8	10.7	10.4	10.9	11.2	12.0	11.5	10.1
90,0°	12.3	12.6	12.3	12.6	12.8	12.8	9.3	8.8	8.5	8.0	7.5	6.9	6.4
92,5°	12.0	12.0	12.0	12.3	12.6	12.8	9.1	8.8	8.3	7.7	7.2	6.7	6.1
95,0°	12.0	12.0	12.0	12.3	12.3	12.3	9.1	8.8	8.3	7.7	7.2	6.7	6.1
97,5°	12.0	12.0	12.0	12.0	12.3	12.3	8.8	8.5	8.3	7.7	7.2	6.4	5.9
100,0°	11.5	11.5	11.7	11.7	12.3	11.7	8.8	8.5	8.3	7.7	7.2	6.7	5.9
102,5°	11.5	11.5	11.5	11.7	11.7	11.7	8.8	8.3	8.3	7.7	7.2	6.4	5.9
105,0°	11.2	11.2	11.2	11.5	11.7	11.7	8.8	8.3	8.3	7.7	7.2	6.4	5.9
107,5°	10.9	10.9	10.9	11.2	11.2	11.2	8.5	8.3	7.7	7.7	7.2	6.4	5.9
110,0°	10.7	10.7	10.7	10.7	10.7	10.7	8.3	8.3	7.7	7.7	6.7	6.4	5.9
112,5°	10.4	10.4	10.4	10.4	10.7	10.7	8.3	8.3	7.7	7.2	6.7	6.4	5.9

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	0.0
2,5°	1.6	1.6	1.6	1.9	1.6	1.9	1.9	1.9	1.6	1.9	1.6	0.0	0.0
5,0°	1.9	1.9	1.9	1.9	1.6	1.9	1.9	1.6	1.6	1.3	1.6	0.1	0.2
7,5°	2.7	2.1	2.1	1.9	2.1	1.9	1.9	1.9	1.6	1.6	1.6	0.7	0.9
10,0°	5.3	3.7	2.9	2.7	2.1	2.1	1.9	1.9	1.9	1.9	1.6	1.7	2.6
12,5°	22.2	13.9	8.5	4.5	3.2	2.7	2.4	2.1	2.1	1.9	1.6	3.6	6.2
15,0°	47.3	39.5	25.9	19.5	15.2	5.9	3.5	2.7	2.4	2.1	2.1	6.2	12.4
17,5°	47.3	29.6	31.2	34.2	23.5	23.2	17.1	9.3	4.8	3.5	3.2	8.4	20.8
20,0°	41.1	28.3	24.6	20.6	23.2	27.0	20.3	16.8	17.9	15.0	13.4	10.3	31.1
22,5°	33.9	22.4	20.8	19.0	19.0	17.6	17.9	20.0	24.8	27.5	28.3	12.7	43.9
25,0°	36.0	22.2	19.5	16.3	16.0	16.8	19.5	21.4	22.4	28.0	27.8	14.8	58.7
27,5°	33.1	24.3	20.6	17.9	17.6	18.7	24.0	23.2	23.5	25.1	23.0	17.7	76.4
30,0°	46.7	41.7	32.8	27.5	21.4	20.8	24.3	22.4	20.6	21.1	19.8	21.0	97.4
32,5°	57.7	52.6	42.2	34.2	28.6	27.2	26.2	23.2	19.8	19.8	17.6	24.6	122.0
35,0°	80.4	67.0	53.1	41.4	33.9	31.2	28.0	24.6	21.6	20.3	18.2	28.6	150.6
37,5°	88.6	76.9	63.6	54.7	45.9	39.8	32.8	29.6	25.6	25.1	22.4	33.0	183.6
40,0°	85.7	74.5	64.6	56.9	49.1	43.8	38.2	36.0	32.8	32.3	30.4	36.9	220.5
42,5°	86.8	74.5	64.1	56.3	48.1	42.5	37.1	36.6	32.6	33.4	32.0	40.7	261.2
45,0°	89.7	76.6	66.0	58.5	49.4	42.2	35.8	34.4	30.2	29.6	27.8	44.5	305.7
47,5°	88.4	77.2	66.8	58.5	48.9	41.4	35.0	32.8	28.6	26.2	25.6	48.4	354.2
50,0°	83.8	75.3	63.6	56.1	47.5	39.3	33.6	30.7	25.1	23.2	23.5	51.9	406.0
52,5°	78.8	71.6	60.9	52.6	44.9	35.2	29.4	26.4	20.6	19.8	19.8	54.4	460.4
55,0°	73.2	69.2	60.6	52.1	41.4	31.5	24.3	21.1	16.6	16.6	16.6	56.8	517.2
57,5°	67.3	64.1	56.3	47.0	31.0	24.3	19.8	16.0	13.4	13.1	13.9	58.3	575.5
60,0°	59.8	55.5	37.6	27.2	22.4	18.7	14.7	10.7	8.5	9.3	9.6	57.4	632.9
62,5°	50.5	35.0	25.4	20.6	17.9	15.0	12.0	8.5	6.7	5.6	5.9	54.9	687.9
65,0°	32.0	24.0	19.5	16.6	14.2	11.5	9.3	6.7	5.3	4.3	3.7	51.3	739.1
67,5°	22.4	18.4	15.2	12.6	10.9	9.1	7.2	5.1	4.3	3.5	3.2	47.8	786.9
70,0°	17.9	15.0	12.8	10.7	9.1	7.5	5.9	4.5	3.5	3.2	3.2	45.0	832.0
72,5°	14.2	12.0	10.7	9.1	7.5	6.1	4.8	3.7	3.2	3.2	3.2	40.8	872.8
75,0°	13.1	10.4	8.5	7.5	6.4	5.1	4.3	3.5	3.2	3.2	3.2	33.2	906.0
77,5°	12.0	9.3	7.2	5.9	5.3	4.3	3.7	3.2	3.2	2.9	3.2	22.2	928.2
80,0°	12.0	8.5	6.4	5.3	4.8	4.0	3.2	3.2	2.7	2.7	2.7	13.1	941.3
82,5°	11.5	8.0	5.9	4.8	4.3	3.7	3.2	2.7	2.7	2.7	2.7	7.6	948.9
85,0°	9.1	6.9	5.3	4.5	3.7	3.7	3.2	2.7	2.7	2.7	2.7	4.1	953.0
87,5°	8.3	6.4	5.1	4.3	3.7	3.2	2.9	2.7	2.7	2.7	2.7	2.8	955.8
90,0°	5.6	4.8	4.3	4.0	3.7	3.2	2.9	2.7	2.7	2.7	2.7	2.4	958.2
92,5°	5.3	4.8	4.3	3.7	3.7	3.2	2.9	2.7	2.7	2.4	2.1	2.3	960.5
95,0°	5.3	4.8	4.3	3.7	3.7	3.2	2.9	2.7	2.7	2.7	2.7	2.3	962.8
97,5°	5.3	4.8	4.3	3.7	3.7	3.2	3.2	2.7	2.7	2.7	2.7	2.3	965.1
100,0°	5.3	4.8	4.3	4.0	3.7	3.2	3.2	2.9	2.7	2.7	2.7	2.2	967.3
102,5°	5.3	4.8	4.3	4.0	3.7	3.2	3.2	2.7	2.7	2.7	2.7	2.2	969.5
105,0°	5.3	4.8	4.3	4.3	3.7	3.5	3.2	2.7	2.7	2.7	2.7	2.1	971.6
107,5°	5.3	4.8	4.3	3.7	3.7	3.5	3.2	2.7	2.7	2.7	2.7	2.1	973.7
110,0°	5.3	4.8	4.3	4.3	3.7	3.2	3.2	2.9	2.7	2.7	2.7	2.0	975.7
112,5°	5.3	4.8	4.3	3.7	3.7	3.5	3.2	2.9	2.7	2.7	2.7	1.9	977.6

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.5	8.8	8.8	8.8	9.3	9.3	9.6	9.9	9.9	9.9	9.9	9.9	9.9
117,5°	8.3	8.3	8.8	8.8	8.8	9.3	9.3	9.3	9.3	9.3	9.6	9.6	9.6
120,0°	8.3	8.3	8.5	8.8	8.8	8.8	9.1	9.1	9.3	9.3	9.3	9.3	9.3
122,5°	8.3	8.3	8.3	8.3	8.5	8.8	8.8	8.8	8.8	8.8	8.8	9.1	9.1
125,0°	8.0	8.3	8.3	8.3	8.3	8.3	8.5	8.8	8.8	8.8	8.8	8.8	8.8
127,5°	7.7	7.7	8.0	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.5	8.5
130,0°	7.7	7.7	7.7	7.7	7.7	7.7	8.3	8.3	8.3	8.3	8.3	8.3	8.3
132,5°	7.2	7.2	7.7	7.7	7.7	7.7	7.7	7.7	7.7	8.0	7.7	8.0	8.0
135,0°	7.2	7.2	7.2	7.2	7.2	7.5	7.7	7.7	7.7	7.7	7.7	7.7	8.0
137,5°	6.7	6.9	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.5	7.5	7.5	7.7
140,0°	6.7	6.7	6.7	6.7	6.9	6.9	7.2	7.2	7.2	7.2	7.2	7.5	7.5
142,5°	6.4	6.4	6.7	6.7	6.7	6.7	6.9	6.9	6.9	6.9	6.9	6.9	7.2
145,0°	6.1	6.1	6.4	6.4	6.4	6.7	6.7	6.7	6.7	6.9	6.9	6.9	6.9
147,5°	5.9	6.1	6.1	6.1	6.4	6.4	6.4	6.4	6.7	6.7	6.7	6.7	6.7
150,0°	5.9	5.9	6.1	6.1	6.1	6.4	6.4	6.4	6.4	6.4	6.4	6.7	6.7
152,5°	5.6	5.6	5.9	5.9	5.9	5.9	6.1	6.1	6.1	6.4	6.4	6.4	6.4
155,0°	5.1	5.3	5.3	5.3	5.6	5.6	5.9	5.6	5.9	5.9	5.9	5.9	6.1
157,5°	4.8	4.8	5.1	5.1	5.1	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.6
160,0°	4.3	4.5	4.5	4.5	4.5	4.8	4.8	4.8	4.8	4.8	5.1	5.1	5.1
162,5°	3.7	3.7	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.5
165,0°	3.2	3.2	3.5	3.5	3.5	3.5	3.5	3.5	3.7	3.7	3.7	3.7	3.7
167,5°	2.7	2.7	2.7	2.7	2.9	2.9	2.7	2.7	2.7	2.7	2.7	2.9	2.9
170,0°	2.1	2.1	2.1	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
172,5°	2.1	1.9	2.1	2.1	2.1	1.9	1.9	1.9	1.6	1.6	1.6	1.6	1.6
175,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
177,5°	1.1	1.1	1.6	1.3	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	9.9	9.9	10.1	10.1	10.1	10.1	8.3	8.0	7.7	7.5	6.7	6.4	5.9
117,5°	9.9	9.6	9.6	9.6	9.6	9.6	8.3	8.0	7.7	7.2	6.9	6.4	5.9
120,0°	9.3	9.3	9.3	9.3	9.6	9.6	8.3	7.7	7.7	7.2	6.9	6.4	5.9
122,5°	9.1	9.1	9.1	9.1	9.1	9.1	7.7	7.7	7.7	7.2	6.7	6.4	5.9
125,0°	8.8	8.8	8.8	8.8	8.5	8.5	7.7	7.7	7.2	7.2	6.7	6.1	5.9
127,5°	8.5	8.5	8.5	8.5	8.5	8.5	7.7	7.2	7.2	6.9	6.7	6.1	5.6
130,0°	8.3	8.3	8.3	8.3	8.0	8.0	7.2	7.2	6.9	6.7	6.4	5.9	5.6
132,5°	8.0	8.0	8.0	8.0	8.0	8.0	7.2	7.2	6.7	6.7	6.1	5.9	5.3
135,0°	7.7	8.0	7.7	7.7	7.5	7.5	6.9	6.7	6.7	6.4	6.1	5.9	5.3
137,5°	7.7	7.5	7.5	7.5	7.5	7.5	6.7	6.7	6.4	6.1	5.9	5.3	5.3
140,0°	7.5	7.5	7.5	7.5	7.5	7.5	6.4	6.1	6.1	5.9	5.6	5.3	4.8
142,5°	7.2	7.2	7.2	6.9	6.9	6.9	6.1	6.1	5.9	5.6	5.6	5.3	4.8
145,0°	6.9	6.9	6.9	6.9	6.9	6.9	5.9	5.9	5.9	5.6	5.3	4.8	4.8
147,5°	6.9	6.9	6.9	6.9	6.9	6.9	5.9	5.6	5.6	5.3	5.3	4.8	4.8
150,0°	6.7	6.4	6.4	6.4	6.4	6.4	5.6	5.6	5.3	5.3	5.1	4.8	4.8
152,5°	6.4	6.4	6.4	6.4	6.4	6.4	5.3	5.3	5.1	5.1	5.1	4.8	4.8
155,0°	5.9	5.9	5.9	5.9	5.9	5.9	5.1	4.8	4.8	4.8	4.8	4.8	4.8
157,5°	5.9	5.9	5.9	5.9	5.9	5.9	4.8	4.5	4.5	4.8	4.8	4.8	4.8
160,0°	5.1	5.1	5.1	5.3	5.1	4.8	4.3	4.0	4.3	4.3	4.3	4.5	4.8
162,5°	4.5	4.5	4.3	4.3	4.3	4.3	3.7	3.5	3.5	3.7	3.7	3.7	3.7
165,0°	3.7	3.7	3.7	3.7	3.7	3.7	3.2	3.2	3.2	3.2	3.2	3.2	3.2
167,5°	2.9	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
170,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.9	2.1	2.1	2.1
172,5°	2.1	1.6	1.6	1.6	1.6	1.6	1.9	1.6	1.6	1.6	1.6	1.6	1.6
175,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
177,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.3	1.6
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	5.3	4.8	4.3	4.3	3.7	3.7	3.2	3.2	2.9	2.7	2.7	1.8	979.4
117,5°	5.3	4.8	4.3	4.3	3.7	3.7	3.2	3.2	2.9	2.7	2.7	1.8	981.2
120,0°	5.3	4.8	4.5	4.3	3.7	3.7	3.2	3.2	3.2	2.9	2.7	1.7	982.9
122,5°	5.3	4.8	4.3	4.3	4.0	3.7	3.2	3.2	3.2	3.2	3.2	1.6	984.5
125,0°	5.3	4.8	4.3	4.3	4.0	3.7	3.2	3.2	3.2	3.2	3.2	1.5	986.1
127,5°	5.3	4.8	4.5	4.3	3.7	3.7	3.5	3.2	3.2	3.2	3.2	1.5	987.5
130,0°	5.3	4.8	4.3	4.3	3.7	3.7	3.2	3.2	3.2	3.2	3.2	1.4	988.9
132,5°	5.1	4.8	4.3	4.3	3.7	3.7	3.5	3.2	3.2	3.2	3.2	1.3	990.2
135,0°	5.1	4.8	4.3	4.0	3.7	3.7	3.2	3.2	3.2	3.2	3.2	1.2	991.4
137,5°	4.8	4.3	4.3	3.7	3.7	3.5	3.2	3.2	3.2	3.2	3.2	1.1	992.5
140,0°	4.8	4.3	4.0	3.7	3.7	3.2	3.2	3.2	3.2	3.2	2.7	1.0	993.6
142,5°	4.8	4.3	4.3	3.7	3.7	3.5	3.2	3.2	3.2	3.2	3.2	1.0	994.5
145,0°	4.5	4.3	4.0	3.7	3.7	3.5	3.2	3.2	3.2	3.2	2.7	0.9	995.4
147,5°	4.5	4.3	4.0	3.7	3.7	3.7	3.2	3.2	3.2	2.9	2.7	0.8	996.2
150,0°	4.3	4.3	4.0	3.7	3.7	3.5	3.2	3.2	3.2	2.7	2.7	0.7	996.9
152,5°	4.3	4.3	4.3	3.7	3.7	3.5	3.2	3.2	2.9	2.7	2.7	0.7	997.6
155,0°	4.3	4.3	4.3	4.0	3.7	3.5	3.5	3.2	3.2	2.9	3.2	0.6	998.1
157,5°	4.8	4.8	4.3	4.0	3.7	3.7	3.7	3.2	3.2	3.2	3.2	0.5	998.7
160,0°	4.8	4.8	4.3	4.0	4.0	3.7	3.7	3.5	3.2	3.2	3.2	0.4	999.1
162,5°	3.7	3.7	3.7	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	0.3	999.4
165,0°	3.2	2.9	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	0.2	999.6
167,5°	2.7	2.7	2.7	2.7	2.7	2.4	2.4	2.4	2.1	2.1	2.1	0.2	999.8
170,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	1.6	1.6	1.6	0.1	999.9
172,5°	1.9	2.1	1.9	1.9	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.1	999.9
175,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	1000.0
177,5°	1.6	1.3	1.3	1.1	1.6	1.3	1.3	1.6	1.3	1.6	1.6	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>LITEPOLE 1</b>	<b>Order number: 5XA5415EF14H + 5XA54000XBL</b> <b>EAN: 4058352636411 + 4050737971421</b>	<b>LP number</b> <b>59088_44</b>
------------------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1530	10.5	10.8	10.6
95	241	252	1452	10.0	10.3	10.2
90	229	250	1379	9.4	9.8	9.6
85	216	248	1301	8.9	9.2	9.0
80	203	246	1223	8.3	8.7	8.5
75	190	243	1144	7.8	8.1	8.0
70	178	241	1072	7.3	7.6	7.4
65	165	238	994	6.9	7.1	7.0
60	152	235	916	6.4	6.6	6.5
55	140	232	843	5.9	6.1	6.0
50	127	229	765	5.4	5.6	5.5
45	114	225	687	5.0	5.2	5.1
40	102	221	614	4.6	4.7	4.6
35	89	216	536	4.1	4.3	4.2
30	76	210	458	3.7	3.8	3.8
28	72	208	434	3.5	3.7	3.6