


Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
	Version Mast bracket Optic asymmetric distribution PL43 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 3170 lm Power consumption = 23.1 W Luminous efficacy = 137.2 lm/W	serial documentation 05.07.2022



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1028 cd/klm**

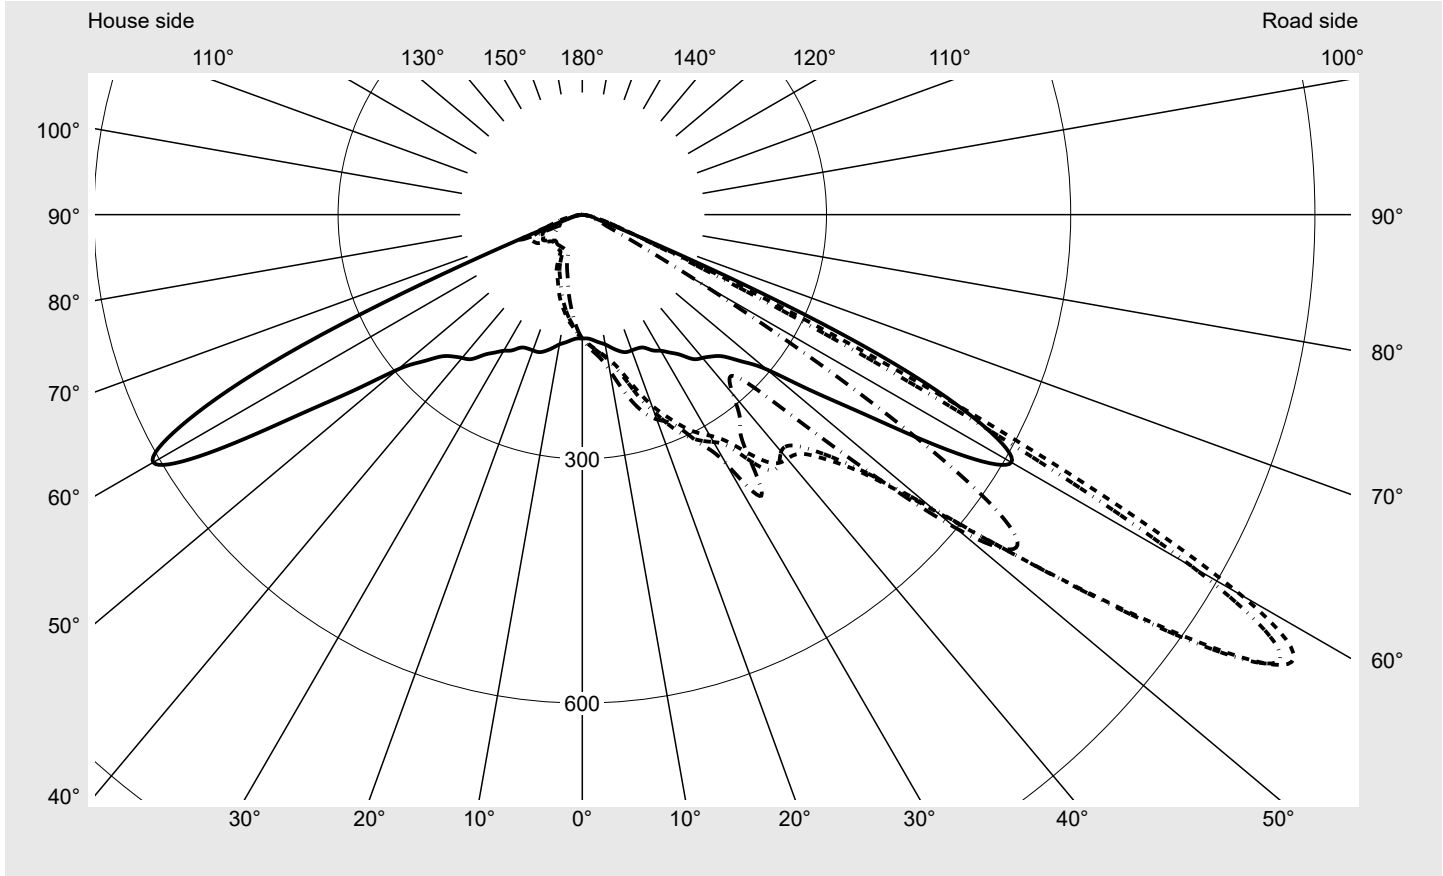

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	56.8
Imax 80°	12.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
----------------------------------------	----------------------------------------------------------------	------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

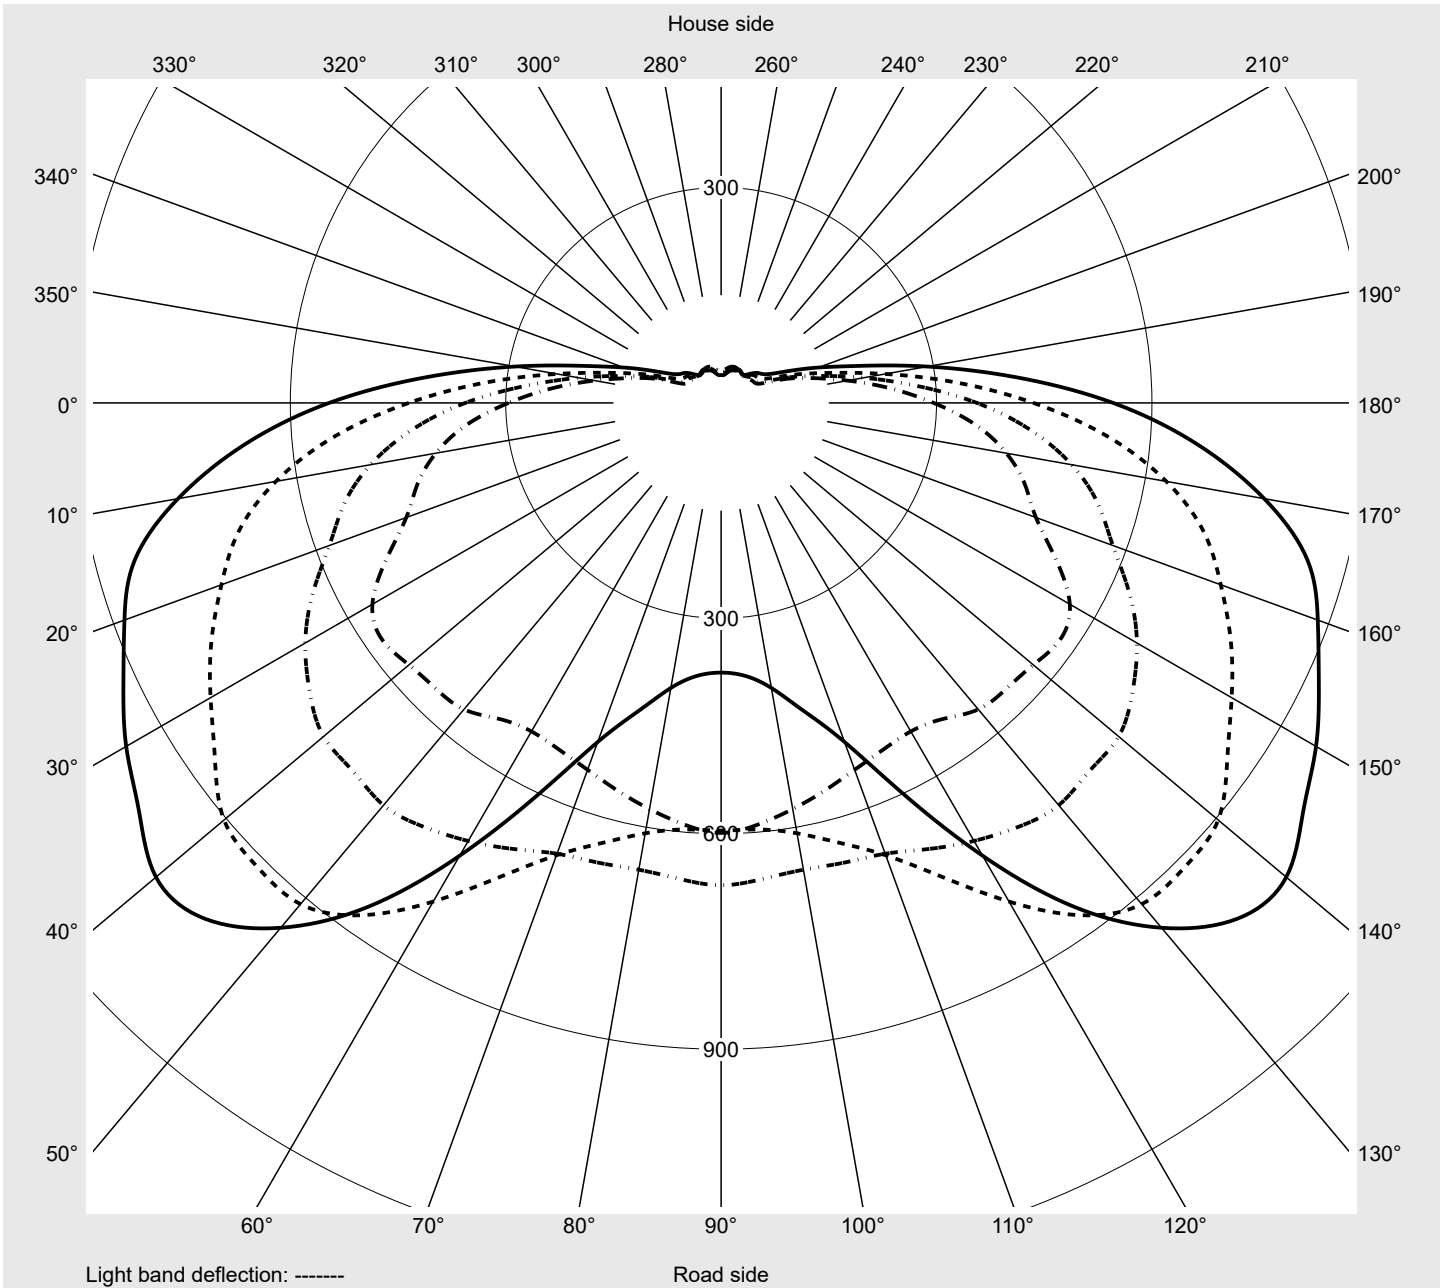

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
----------------------------------------	----------------------------------------------------------------	------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	152.3	153.0	153.7	154.6	155.3	156.3	157.0	157.8	158.3	158.8	159.4	159.9	160.3
5,0°	154.8	156.4	157.9	159.2	160.4	161.7	162.8	163.8	164.6	165.3	166.1	166.8	167.4
7,5°	158.3	160.7	162.8	164.5	166.0	167.4	168.9	170.2	171.2	172.2	173.1	174.2	175.2
10,0°	161.9	165.2	167.7	169.8	171.5	173.3	175.1	177.1	178.9	180.6	182.3	184.6	186.8
12,5°	167.7	171.2	174.2	176.3	178.7	180.7	183.5	186.4	189.6	193.9	198.1	201.5	204.5
15,0°	173.2	177.5	180.9	183.3	185.9	189.5	193.7	199.5	206.4	212.2	217.8	222.1	224.9
17,5°	177.1	182.4	186.7	190.2	193.7	198.9	206.9	217.3	227.3	236.6	241.4	244.7	246.6
20,0°	177.5	184.8	190.4	195.2	200.4	207.6	220.3	234.4	249.1	257.8	264.4	266.4	264.0
22,5°	177.7	187.1	194.4	200.5	207.2	218.0	233.3	252.2	267.4	280.2	286.9	283.9	276.1
25,0°	180.4	191.8	199.9	206.4	213.8	226.3	244.2	265.8	285.4	299.0	301.2	296.2	287.2
27,5°	188.1	200.6	209.2	215.8	223.8	236.9	257.5	280.9	301.2	312.6	313.9	308.8	301.6
30,0°	193.1	209.1	219.9	227.7	236.0	250.6	271.7	293.7	313.5	322.6	325.6	325.1	320.8
32,5°	201.0	221.2	235.2	244.9	255.0	271.6	292.4	314.0	330.1	339.4	345.2	350.9	361.4
35,0°	210.2	237.3	255.5	267.6	281.5	300.6	322.7	345.2	359.0	376.4	398.4	422.1	433.1
37,5°	223.6	254.8	273.0	282.1	291.2	307.6	340.0	368.9	384.9	392.6	407.4	414.1	406.9
40,0°	229.7	265.6	288.3	302.2	314.2	335.8	372.7	393.1	391.6	380.1	387.7	395.5	385.4
42,5°	236.2	272.1	298.8	316.0	330.4	357.6	397.9	410.2	398.4	384.8	386.4	388.5	373.9
45,0°	246.7	287.3	317.1	337.4	354.7	391.9	438.4	444.4	425.8	413.9	406.8	395.1	374.0
47,5°	267.4	312.7	349.1	374.8	397.0	442.8	491.3	494.2	472.5	464.7	453.0	428.7	407.6
50,0°	296.0	356.6	403.4	438.0	466.6	514.2	560.8	575.9	567.6	562.4	557.2	537.5	528.3
52,5°	356.2	432.5	495.8	543.5	580.6	627.5	668.7	699.7	722.8	725.3	731.5	721.0	704.4
55,0°	435.0	541.1	629.6	696.2	740.6	783.2	821.0	860.8	903.7	913.7	911.3	871.0	801.9
57,5°	545.9	666.4	768.1	845.4	884.3	918.5	956.8	989.9	1027.5	1016.2	954.2	856.5	728.1
60,0°	608.6	730.6	824.8	896.5	919.4	933.1	940.4	948.8	934.3	866.0	760.2	619.5	467.5
62,5°	545.3	656.2	724.2	765.9	757.5	731.9	698.8	668.4	601.9	505.0	395.9	301.2	215.6
65,0°	378.6	423.0	450.1	456.4	434.8	398.6	363.7	333.3	275.5	216.2	163.7	135.3	103.7
67,5°	139.6	158.6	161.6	157.4	150.7	139.6	130.7	125.0	108.3	94.3	80.9	68.1	55.2
70,0°	44.6	46.3	46.2	46.5	48.0	49.2	51.5	53.6	54.7	54.9	52.8	50.0	45.0
72,5°	20.8	21.6	21.3	21.5	23.1	24.5	26.2	29.2	32.7	36.1	38.4	36.7	32.9
75,0°	16.0	17.1	16.2	15.9	16.8	17.3	18.6	21.0	22.6	23.0	23.4	23.7	22.3
77,5°	12.8	13.1	11.7	11.2	11.5	11.8	12.5	13.3	13.8	13.4	13.3	13.8	13.9
80,0°	8.4	7.4	6.6	6.2	6.5	7.0	7.1	7.4	7.6	7.6	7.5	7.5	7.4
82,5°	3.3	3.1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.5	3.4	3.2	3.4
85,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.1
87,5°	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
----------------------------------------	----------------------------------------------------------------	------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2
2,5°	160.6	160.8	161.1	161.4	161.7	161.8	151.4	150.4	149.6	148.7	148.0	147.2	146.5
5,0°	167.7	168.2	168.9	169.5	169.9	170.1	153.1	151.1	148.8	146.6	144.5	142.3	140.0
7,5°	175.8	176.4	177.3	178.3	179.1	179.3	155.5	152.3	148.8	145.0	141.2	137.8	134.3
10,0°	188.5	190.1	191.4	193.0	194.2	194.6	158.3	153.9	148.5	143.2	137.9	132.8	127.6
12,5°	207.2	209.5	211.6	213.6	215.4	215.9	162.8	156.8	149.6	142.6	135.1	127.8	120.8
15,0°	227.5	230.2	232.6	234.9	237.1	237.9	167.0	159.0	150.4	141.3	132.0	122.9	114.2
17,5°	247.3	247.7	249.2	251.5	254.6	255.8	168.8	159.6	148.3	137.5	126.9	116.7	106.5
20,0°	260.1	257.7	258.4	260.9	265.1	267.7	167.5	155.5	143.0	130.9	119.3	108.2	97.1
22,5°	269.1	264.8	264.9	267.5	272.7	276.0	164.8	151.0	136.6	123.6	111.4	99.7	89.3
25,0°	279.2	274.8	275.5	279.8	287.5	292.4	165.4	158.3	132.9	118.3	104.6	92.9	83.6
27,5°	294.3	291.5	294.7	303.4	313.8	318.9	170.3	150.8	132.1	115.3	100.6	89.2	78.3
30,0°	316.4	316.4	323.0	335.2	348.1	353.2	172.7	152.5	132.6	113.6	98.3	85.8	67.3
32,5°	366.6	368.8	377.4	392.0	404.2	409.3	175.9	152.6	132.3	113.5	97.8	79.5	57.2
35,0°	418.3	389.2	363.8	354.3	349.9	346.8	181.1	155.2	133.0	113.5	95.0	67.7	54.0
37,5°	383.2	357.6	344.1	337.1	323.5	318.7	188.0	158.6	133.0	112.1	86.7	58.6	52.8
40,0°	358.5	327.8	311.7	296.1	289.1	288.0	190.3	157.7	130.6	108.0	72.1	56.0	51.9
42,5°	339.3	306.9	286.3	272.3	269.4	269.6	192.1	157.2	129.4	104.8	67.7	56.1	51.9
45,0°	340.2	312.0	299.3	295.5	300.3	305.2	198.5	158.5	127.1	100.4	65.4	56.0	51.8
47,5°	391.0	388.0	392.3	406.5	423.4	433.8	212.7	165.8	123.3	98.4	65.5	55.5	52.2
50,0°	533.1	543.7	558.7	574.4	589.4	598.8	235.6	179.0	133.3	98.3	65.3	55.1	53.4
52,5°	685.4	668.2	662.8	660.2	665.4	671.8	273.1	201.6	145.0	105.7	72.9	58.3	56.2
55,0°	728.4	670.4	634.1	608.6	596.4	595.5	328.0	232.1	161.8	117.4	84.6	67.1	61.8
57,5°	601.1	502.5	444.1	403.1	381.6	375.6	411.7	291.6	199.2	144.0	105.7	81.2	70.2
60,0°	350.7	269.8	222.6	190.8	173.2	166.1	469.5	341.1	239.3	169.8	121.1	89.6	74.0
62,5°	160.1	123.8	98.7	80.3	69.1	64.9	435.8	324.6	239.9	176.3	122.8	91.3	73.9
65,0°	80.8	64.0	45.1	36.5	32.8	32.8	290.9	224.9	173.3	132.3	102.5	77.3	69.5
67,5°	48.3	42.3	33.9	30.0	27.2	26.2	104.6	83.1	83.7	71.8	60.3	54.1	59.0
70,0°	38.8	32.2	27.1	23.2	20.6	19.6	32.8	27.7	30.9	33.7	32.9	34.2	44.2
72,5°	28.8	24.2	20.4	17.9	16.2	14.9	20.5	19.6	19.5	20.5	20.3	22.1	31.4
75,0°	20.5	17.6	14.5	12.5	12.1	11.1	15.4	14.4	14.2	14.7	14.1	15.7	23.2
77,5°	13.5	11.8	9.9	9.0	8.9	8.4	12.4	10.2	9.7	9.9	9.6	10.8	16.0
80,0°	7.3	6.5	5.5	5.0	4.5	4.3	7.2	5.7	5.4	5.9	5.6	6.3	9.6
82,5°	3.1	2.7	2.5	2.3	2.1	2.1	3.0	2.8	2.5	2.7	2.8	2.8	4.0
85,0°	1.0	1.0	1.0	0.9	0.9	0.9	1.3	1.3	1.3	1.2	1.2	1.2	1.1
87,5°	0.6	0.6	0.5	0.5	0.5	0.5	0.9	0.9	1.0	1.0	1.0	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	152.2	0.2	0.2
2,5°	145.7	144.9	144.1	143.4	142.8	142.3	141.8	141.3	140.8	140.6	140.5	1.8	2.0
5,0°	137.7	135.7	133.8	132.1	130.6	129.3	128.2	127.2	126.5	126.0	125.9	3.6	5.6
7,5°	130.8	127.4	124.1	121.2	118.5	116.2	114.2	112.7	111.7	111.1	111.0	5.4	11.0
10,0°	122.6	118.0	113.7	109.8	106.3	103.4	101.0	99.0	97.6	96.8	96.6	7.2	18.2
12,5°	114.3	108.4	103.1	98.2	93.9	90.3	87.3	84.9	83.3	82.4	82.1	9.2	27.4
15,0°	106.0	98.6	92.1	86.5	81.9	78.5	75.8	73.8	72.6	71.9	71.7	11.3	38.6
17,5°	96.8	88.4	81.9	77.1	73.2	69.9	67.1	64.8	63.1	62.3	62.0	13.4	52.1
20,0°	87.6	80.4	74.5	68.2	61.9	57.2	54.2	52.5	51.6	51.3	51.2	15.5	67.5
22,5°	81.1	73.1	63.5	55.5	51.8	50.5	49.8	49.4	49.1	49.0	49.0	17.5	85.1
25,0°	74.8	63.3	54.3	51.2	50.2	49.5	49.0	48.6	48.2	48.0	48.0	19.8	104.9
27,5°	64.0	53.7	51.1	50.3	49.7	49.1	48.5	48.1	47.6	47.4	47.4	22.4	127.3
30,0°	53.7	51.2	50.3	50.0	49.6	49.0	48.5	48.0	47.5	47.1	47.1	25.4	152.7
32,5°	51.9	50.5	50.1	50.0	49.6	49.2	48.7	48.2	47.6	47.1	47.1	29.5	182.2
35,0°	51.5	50.3	49.9	49.7	49.6	49.3	49.1	48.6	48.0	47.2	47.1	33.1	215.2
37,5°	50.8	49.9	49.5	49.5	49.4	49.3	49.4	49.1	48.5	47.5	47.4	35.0	250.3
40,0°	49.8	49.2	48.8	49.0	49.2	49.6	50.0	49.9	49.0	47.8	47.5	36.5	286.7
42,5°	49.3	48.3	48.1	48.5	49.4	50.0	50.6	49.9	48.7	47.1	46.6	38.2	325.0
45,0°	48.8	47.6	47.5	48.4	49.5	49.9	50.2	50.1	48.6	46.6	45.9	42.0	367.0
47,5°	49.1	47.5	47.5	48.5	49.2	50.4	51.2	51.7	49.7	46.9	46.3	49.8	416.7
50,0°	51.0	48.7	48.4	48.6	50.2	52.5	53.3	52.1	49.0	46.1	45.3	63.0	479.8
52,5°	54.8	51.7	49.3	49.5	51.9	52.9	53.0	50.8	47.0	44.2	43.3	79.3	559.1
55,0°	59.7	55.4	50.8	50.4	52.4	52.1	51.1	48.6	44.2	41.5	40.5	93.7	652.8
57,5°	65.1	57.4	50.9	49.9	51.7	49.6	48.1	45.9	41.8	38.9	38.8	99.5	752.3
60,0°	67.5	55.2	49.8	48.4	48.8	47.2	44.9	43.5	39.8	37.2	37.4	90.6	843.0
62,5°	69.4	54.7	48.1	45.0	45.1	44.3	43.1	42.3	39.8	37.0	36.9	68.1	911.1
65,0°	68.9	53.6	45.3	41.5	42.3	42.6	41.8	41.0	38.0	35.5	35.9	41.0	952.1
67,5°	61.5	48.1	40.4	38.0	39.8	41.1	40.2	38.2	34.3	38.8	79.9	19.3	971.4
70,0°	49.3	40.7	35.6	34.2	36.8	38.4	36.3	32.5	27.8	26.1	56.8	10.1	981.6
72,5°	38.9	34.9	31.3	30.1	32.4	33.8	30.8	25.4	20.2	20.4	27.1	6.9	988.4
75,0°	30.5	29.4	26.0	26.3	28.5	26.6	20.9	14.4	12.0	13.0	14.0	5.0	993.5
77,5°	22.1	22.1	17.8	15.8	18.7	18.8	15.1	9.0	7.9	7.5	7.5	3.4	996.9
80,0°	12.2	11.5	9.8	9.5	8.6	5.6	5.0	4.0	3.4	3.4	3.3	1.8	998.7
82,5°	4.8	4.0	3.6	3.1	2.4	1.7	1.6	1.3	1.1	1.0	1.0	0.8	999.5
85,0°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.3	999.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.6	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 micro	Order number: 5XA7762A4A3A EAN: 4058352669860	LP number 59324_14
----------------------------------------	----------------------------------------------------------------	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3170	23.1	23.8	23.5
95	241	252	3008	21.7	22.4	22.0
90	229	250	2858	20.4	21.1	20.8
85	216	248	2696	19.1	19.7	19.4
80	203	246	2534	17.8	18.4	18.1
75	190	243	2371	16.6	17.1	16.8
70	178	241	2221	15.5	15.9	15.7
65	165	238	2059	14.3	14.7	14.5
60	152	235	1897	13.1	13.5	13.3
55	140	232	1747	12.1	12.4	12.2
50	127	229	1585	11.0	11.3	11.2
45	114	225	1423	9.9	10.2	10.0
40	102	221	1273	8.9	9.2	9.0
35	89	216	1111	7.9	8.1	8.0
30	76	210	949	7.0	7.1	7.0
25	63	203	786	5.9	6.1	6.0
20	51	195	636	5.1	5.2	5.2
15	39	185	487	4.2	4.3	4.2