


Photometric test report

Family Floodlight FL11 	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
	Version standard bracket Optic asymmetric distribution PL52 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 108800 lm Power consumption = 916.8 W Luminous efficacy = 118.7 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1105 cd/klm**

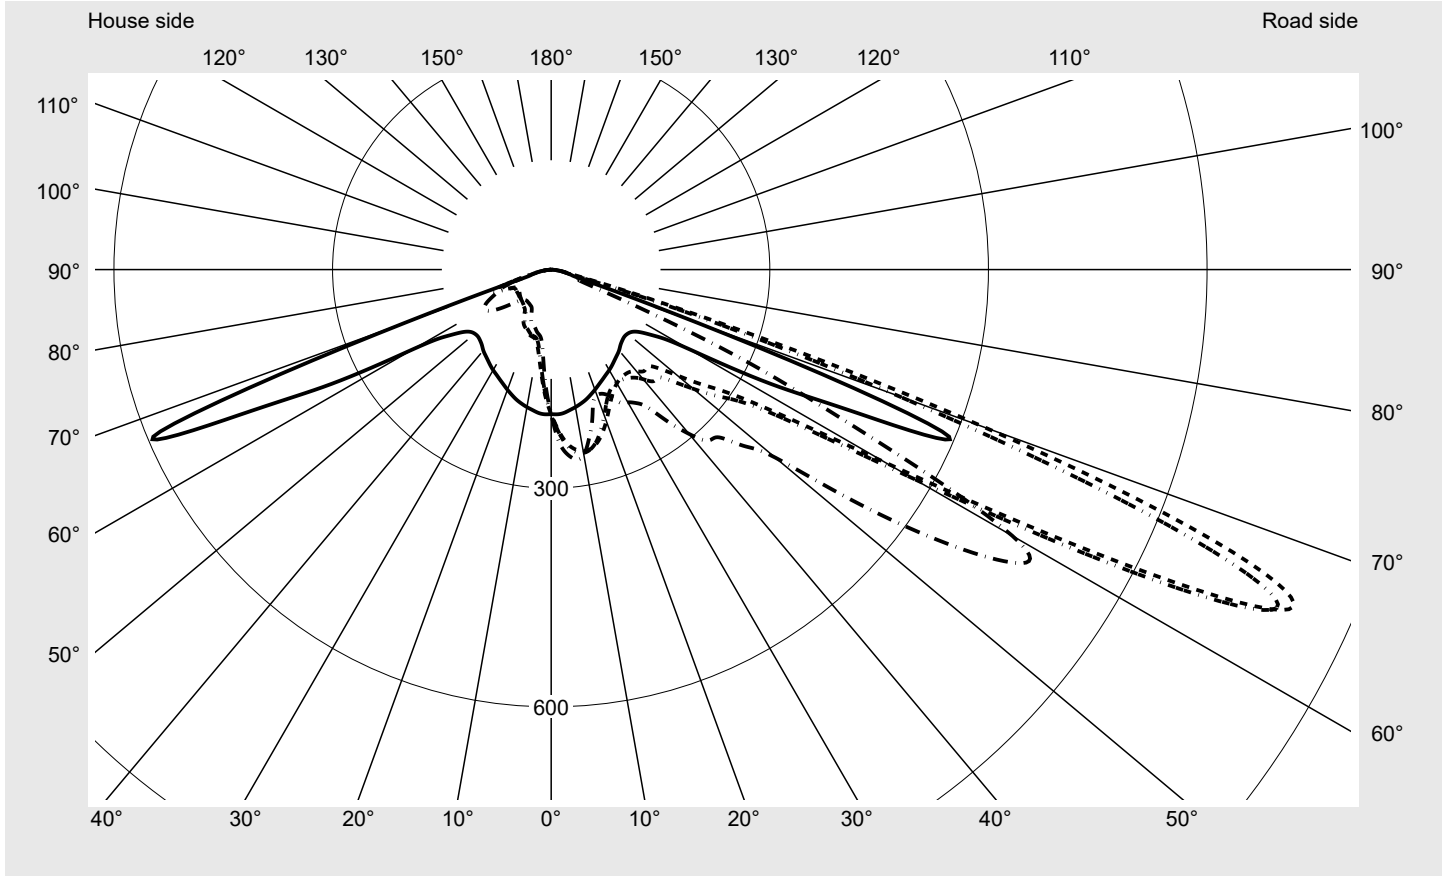

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	749.2
Imax 80°	33.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
-----------------------------------------	------------------------------------------------------------------	-------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

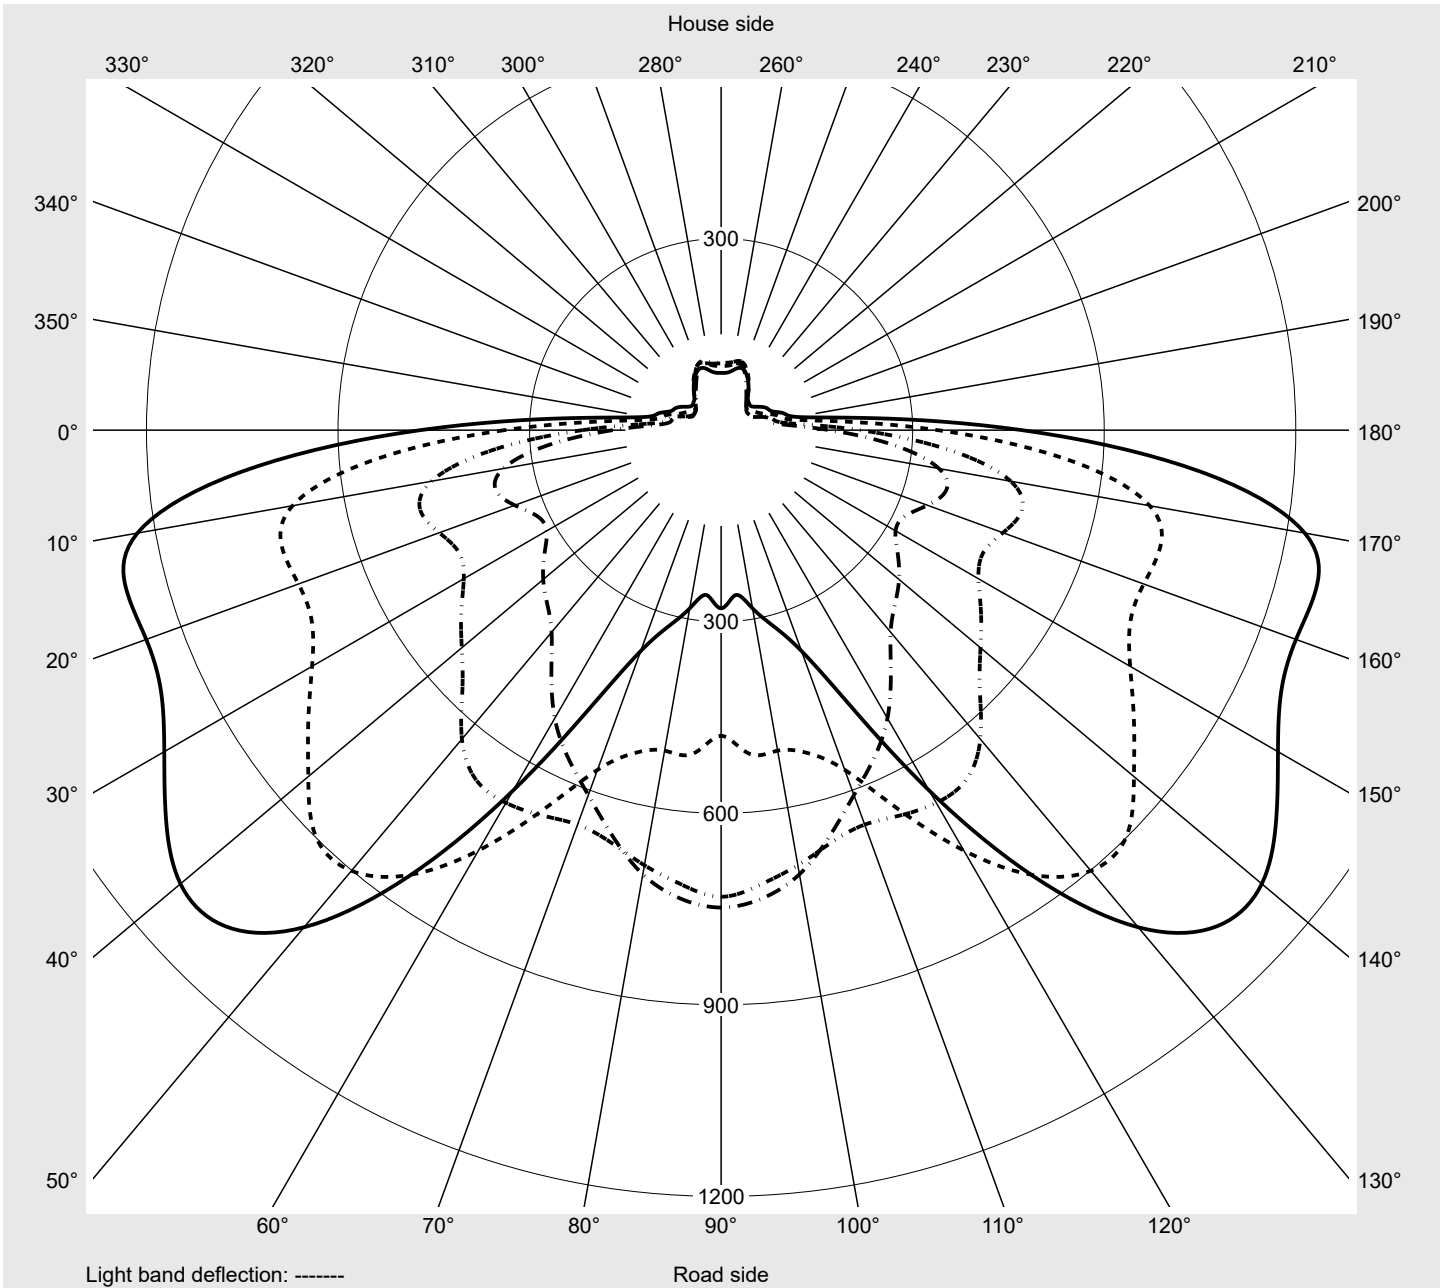

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
----------------------------------	------------------------------------------------------------------	------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	198.7	201.8	204.8	207.9	210.5	213.1	215.6	218.0	220.0	222.1	223.9	225.2	226.6
5,0°	197.5	203.9	210.1	215.9	221.0	226.1	230.5	234.7	238.2	241.5	244.4	246.7	248.8
7,5°	194.5	204.0	212.8	220.8	227.9	234.4	239.8	244.7	248.5	251.9	254.7	256.6	258.2
10,0°	191.6	203.6	214.7	224.5	232.6	239.7	245.3	249.8	253.0	255.4	256.9	257.5	257.7
12,5°	188.3	202.7	215.6	226.6	235.2	242.2	247.1	250.3	251.7	252.0	251.1	249.3	247.1
15,0°	184.6	201.1	215.3	227.2	236.0	242.1	245.5	246.5	245.4	242.6	238.7	234.1	229.5
17,5°	180.1	198.7	214.3	226.4	234.7	239.4	240.6	238.8	234.4	228.4	221.6	215.0	208.9
20,0°	175.5	196.0	212.6	225.0	232.3	235.0	233.5	228.5	221.2	212.9	204.8	197.9	192.3
22,5°	170.8	193.2	210.9	223.1	229.2	229.5	225.0	216.9	207.2	198.1	190.9	186.0	183.2
25,0°	166.5	190.8	209.5	221.4	226.0	223.6	216.2	205.7	195.3	187.5	183.1	181.8	182.9
27,5°	162.6	188.9	208.7	220.2	223.0	217.9	207.4	195.5	186.2	181.2	181.1	184.8	190.2
30,0°	159.3	187.6	208.7	219.9	220.9	213.2	200.6	188.1	180.3	178.9	183.9	192.4	200.6
32,5°	155.6	186.4	208.9	219.9	219.2	209.1	195.1	182.6	176.9	179.4	188.7	200.9	210.7
35,0°	151.7	185.0	209.5	220.7	218.2	205.8	190.5	178.9	176.0	182.1	194.6	208.8	219.8
37,5°	148.2	184.6	210.6	222.0	217.8	203.0	187.2	177.0	177.0	186.9	202.3	219.6	234.1
40,0°	144.9	183.9	212.1	223.7	218.0	202.1	186.1	178.0	182.1	196.4	216.1	237.1	256.9
42,5°	140.7	183.2	213.9	225.3	218.0	200.6	184.8	179.7	188.7	207.7	230.6	252.9	273.8
45,0°	137.8	184.0	217.3	228.0	217.6	196.8	179.6	176.1	187.8	209.2	234.2	258.2	278.2
47,5°	136.2	188.2	224.9	235.1	222.0	198.5	182.2	183.4	200.9	227.5	253.2	274.4	292.0
50,0°	136.9	195.8	237.5	249.0	234.0	209.5	195.4	202.1	226.1	254.5	277.3	293.1	307.0
52,5°	140.3	208.3	256.9	270.1	254.2	229.3	218.2	230.9	257.7	284.1	301.5	311.8	324.9
55,0°	150.0	230.6	289.0	303.9	285.4	259.2	250.9	267.2	293.3	315.0	328.7	342.9	377.4
57,5°	169.9	272.7	346.5	364.8	343.9	318.1	315.5	337.7	363.8	385.1	413.0	463.4	521.0
60,0°	217.5	360.1	460.5	487.4	469.7	453.2	465.4	496.9	530.3	572.9	631.6	668.8	674.0
62,5°	339.5	549.8	681.6	711.7	704.4	707.4	739.7	789.2	844.0	898.4	900.8	850.3	760.1
65,0°	471.4	756.3	928.3	964.4	958.1	967.9	1007.0	1061.4	1105.4	1098.6	1016.3	853.0	651.7
67,5°	580.5	784.3	996.7	1047.0	1038.0	1032.0	1044.8	1049.4	1010.6	915.8	763.6	561.5	403.9
70,0°	214.6	443.1	619.1	717.7	749.2	739.5	731.6	704.1	633.2	506.4	378.9	314.3	250.3
72,5°	47.8	71.8	92.0	126.4	207.8	269.5	281.4	276.1	237.2	192.6	177.4	155.1	127.9
75,0°	28.7	31.6	33.7	36.4	44.1	64.2	72.8	73.1	64.5	40.1	61.7	56.1	51.5
77,5°	21.1	22.2	23.2	24.3	26.0	28.7	29.0	28.1	26.6	26.4	28.3	28.1	28.6
80,0°	16.3	15.8	15.8	16.5	17.1	18.1	17.9	17.5	17.5	17.8	17.8	18.0	22.8
82,5°	10.4	9.7	9.8	10.2	10.3	10.5	10.7	10.3	10.3	10.3	10.1	10.1	11.6
85,0°	5.3	4.8	4.8	4.9	4.9	5.0	4.9	4.8	4.6	4.3	4.2	4.0	3.9
87,5°	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	227.8	228.9	229.7	230.2	230.5	235.4	195.7	192.6	189.5	186.4	183.3	180.4	177.7
5,0°	250.5	251.8	252.8	253.5	254.0	254.3	191.1	184.3	177.5	171.0	164.5	158.5	153.0
7,5°	259.5	260.4	261.0	261.4	261.7	262.5	184.9	174.8	164.9	155.3	146.2	138.0	130.6
10,0°	257.6	257.2	256.7	256.3	256.1	258.1	179.0	165.9	153.2	141.4	130.7	121.5	113.7
12,5°	244.8	242.5	240.5	239.0	238.3	238.7	172.8	157.2	142.3	129.2	118.1	109.5	103.1
15,0°	225.2	221.2	218.1	215.8	214.7	216.7	166.7	148.8	132.7	119.2	109.2	102.4	98.4
17,5°	203.8	199.6	196.5	194.5	193.6	191.8	159.7	140.2	123.3	110.8	102.7	98.4	96.4
20,0°	188.3	185.5	183.8	182.9	182.7	183.4	153.1	132.2	115.3	104.2	98.4	96.1	94.5
22,5°	181.8	181.2	181.4	182.1	183.0	184.5	146.4	124.6	108.3	99.1	95.4	93.6	91.3
25,0°	184.8	186.5	188.3	190.5	192.4	192.4	140.5	118.0	102.8	95.7	93.1	90.8	88.2
27,5°	194.5	196.9	199.1	202.3	204.3	206.0	134.7	111.9	98.3	92.9	90.5	87.9	85.5
30,0°	205.5	206.3	207.7	211.1	211.7	210.4	129.5	106.9	94.7	90.7	88.0	85.6	81.4
32,5°	214.6	214.1	215.3	219.3	217.5	217.2	124.3	101.9	91.5	88.2	85.5	82.6	74.4
35,0°	224.3	225.8	231.4	237.6	233.6	230.9	118.8	97.1	88.5	85.5	81.9	75.5	67.3
37,5°	242.5	248.6	257.2	261.7	261.4	262.9	113.6	92.6	85.7	83.0	75.6	67.8	63.3
40,0°	269.5	277.8	286.8	292.2	294.3	294.4	108.8	88.8	83.0	80.1	67.9	62.7	61.4
42,5°	288.1	296.4	305.4	312.4	315.9	318.3	103.7	85.1	80.7	76.5	62.5	60.1	59.5
45,0°	292.4	300.4	310.5	319.5	324.1	325.6	99.1	81.9	78.6	73.3	59.5	58.0	57.6
47,5°	307.0	315.2	326.9	341.7	349.2	358.0	95.5	79.4	76.9	70.2	57.2	56.1	56.1
50,0°	321.7	336.5	356.9	382.5	399.0	401.3	92.9	77.8	75.5	67.2	54.8	54.3	54.6
52,5°	349.2	386.2	431.6	478.4	507.7	518.9	91.7	76.8	74.7	64.5	52.7	52.4	52.9
55,0°	434.8	497.1	555.8	609.9	642.5	646.0	93.1	77.2	74.5	62.1	51.1	50.6	51.3
57,5°	566.7	608.2	657.7	706.3	736.2	747.6	99.1	79.8	75.3	60.4	50.3	49.1	49.8
60,0°	665.6	657.4	668.3	691.9	714.2	730.8	115.8	86.0	79.0	63.0	52.8	49.8	49.2
62,5°	654.2	566.1	523.5	509.6	508.8	478.7	166.6	102.4	89.9	74.1	64.4	58.1	53.1
65,0°	473.0	368.1	318.0	283.4	259.2	279.0	220.3	119.6	101.5	85.7	80.1	72.9	63.9
67,5°	303.2	234.6	127.7	94.1	83.6	72.6	142.4	96.1	89.7	82.1	80.7	77.1	70.6
70,0°	193.4	146.5	58.3	44.8	44.0	44.3	56.4	49.2	49.6	52.8	55.7	59.0	59.5
72,5°	97.7	77.0	42.5	37.4	37.6	37.8	32.8	32.2	32.2	33.2	34.5	37.6	39.2
75,0°	45.7	41.4	34.4	32.5	31.6	32.6	25.8	25.7	25.6	26.2	27.0	28.4	30.1
77,5°	30.7	31.6	27.6	23.6	22.4	21.6	20.5	19.9	19.4	20.0	20.3	21.3	22.5
80,0°	33.4	29.1	19.0	15.7	14.8	15.4	16.2	14.2	13.7	14.1	14.3	14.8	15.0
82,5°	15.5	14.5	10.2	8.8	8.3	8.3	9.7	8.6	8.7	8.8	9.0	8.8	8.7
85,0°	3.8	3.6	3.5	3.4	3.4	3.6	4.5	4.4	4.4	4.4	4.3	4.1	3.9
87,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.7	1.7	1.6	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	0.3	0.3
2,5°	175.3	172.9	170.7	168.9	167.2	165.8	164.6	163.7	163.1	162.5	162.7	2.4	2.7
5,0°	147.8	143.2	139.0	135.4	132.4	129.7	127.5	125.9	124.7	124.0	123.9	4.6	7.3
7,5°	124.0	118.4	113.7	109.9	106.8	104.4	102.6	101.3	100.4	99.8	99.6	6.7	13.9
10,0°	107.5	102.7	99.2	96.7	95.0	93.7	92.9	92.3	91.9	91.6	91.5	8.6	22.5
12,5°	98.7	95.8	94.0	92.7	91.7	90.8	90.0	89.3	88.8	88.4	88.2	10.4	32.9
15,0°	96.0	94.3	92.8	91.0	89.2	87.6	86.2	85.2	84.3	83.8	83.6	11.8	44.7
17,5°	94.9	92.9	90.4	88.0	85.9	84.1	82.6	81.5	80.7	80.1	79.9	13.0	57.8
20,0°	92.4	89.9	87.5	85.5	83.6	81.9	80.4	79.2	78.5	78.0	77.8	14.2	72.0
22,5°	88.9	86.9	85.1	83.6	81.4	77.6	75.0	73.4	72.6	72.2	72.0	15.3	87.3
25,0°	86.1	84.2	82.4	78.8	74.1	69.7	66.1	64.7	64.0	63.6	63.4	16.5	103.8
27,5°	82.2	78.7	74.9	70.8	66.1	63.3	61.7	60.3	59.2	58.5	58.2	17.8	121.5
30,0°	75.0	70.4	67.7	65.0	63.5	62.1	60.4	58.9	57.8	57.0	56.7	19.1	140.7
32,5°	67.2	65.2	64.1	63.1	62.1	60.8	59.3	57.9	56.7	56.0	55.6	20.5	161.2
35,0°	64.0	63.3	62.4	61.6	60.9	59.8	58.5	57.2	56.2	55.4	55.0	22.1	183.2
37,5°	62.5	61.7	61.0	60.3	59.8	59.1	57.9	56.7	55.7	54.8	54.4	24.0	207.2
40,0°	60.8	60.3	59.7	59.3	59.0	58.5	57.8	57.0	56.2	55.3	54.8	26.3	233.5
42,5°	59.2	59.0	58.8	58.6	58.6	58.5	58.4	58.3	57.9	57.0	56.3	28.4	261.9
45,0°	57.9	58.2	58.3	58.5	58.8	59.5	60.4	61.2	61.4	60.6	59.9	29.9	291.8
47,5°	56.9	57.7	58.4	59.0	60.2	62.1	64.4	66.4	67.2	66.9	66.3	32.5	324.2
50,0°	55.7	57.2	58.7	60.5	63.0	66.5	71.0	74.6	76.0	76.1	75.8	36.1	360.3
52,5°	54.5	56.6	59.2	62.5	67.0	73.2	80.5	85.6	87.0	87.1	86.9	41.8	402.1
55,0°	53.2	56.1	60.0	65.4	72.4	81.8	91.8	97.7	97.9	97.6	97.6	50.1	452.3
57,5°	52.1	56.0	61.4	68.9	78.7	90.8	102.4	107.7	106.0	104.7	104.5	61.7	514.0
60,0°	51.3	55.7	62.6	72.2	83.7	96.6	108.4	112.2	108.5	106.0	105.6	76.9	590.9
62,5°	52.3	56.2	63.8	74.5	86.6	98.6	108.3	109.7	104.4	101.2	100.6	94.5	685.4
65,0°	59.7	61.2	65.1	74.3	85.2	94.9	101.5	100.6	94.0	90.2	89.6	105.6	791.0
67,5°	70.8	76.7	70.4	71.4	78.8	84.4	87.9	86.4	81.3	78.6	78.3	95.5	886.4
70,0°	69.5	84.7	76.7	65.7	68.6	73.5	76.3	74.7	70.1	67.6	67.4	61.9	948.4
72,5°	47.4	61.9	61.1	56.0	57.7	60.7	61.9	59.8	55.2	53.4	54.3	24.8	973.2
75,0°	31.9	36.3	40.3	42.5	47.6	45.9	45.5	43.5	40.1	38.7	40.0	10.9	984.1
77,5°	23.8	26.0	28.0	29.4	31.1	32.7	33.1	31.2	28.5	27.1	28.0	7.0	991.0
80,0°	15.7	16.7	17.9	18.7	18.9	19.5	19.8	18.6	17.3	16.5	16.4	4.8	995.8
82,5°	8.8	9.1	9.6	9.4	9.7	10.0	9.5	8.6	7.8	7.4	7.3	2.7	998.5
85,0°	3.9	3.8	3.7	3.5	3.2	2.9	2.8	2.8	2.7	2.7	2.7	1.1	999.6
87,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
----------------------------------	------------------------------------------------------------------	------------------------------

Dimming levels table	environmental temperature: 10°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	108800	916.8
95	233	103327	838.6
90	215	97898	771.6
85	199	92591	712.7
80	183	86935	653.5
75	169	81638	601.9
70	155	76159	551.2
65	142	70860	504.2
60	129	65401	457.6
55	116	59671	411.7
50	104	54403	368.4
45	92	48798	326.3
40	81	43508	287.6
35	70	38113	248.9
30	59	32542	210.4
25	49	27412	176.2
20	38	21562	138.7
15	28	16199	104.9
10	18	10667	71.2
5	9	5559	41.3
1	2	1507	16.8

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
91	215	94474	766.2
90	211	93298	751.3
85	194	88033	688.6
80	179	83003	633.8
75	164	77646	579.1
70	151	72720	531.9
65	137	67241	481.9
60	125	62364	439.2
55	113	57188	396.7
50	101	52078	354.6
45	89	46568	312.6
40	78	41393	274.4
35	67	36126	235.8
30	57	31131	201.4
25	47	26017	167.4
20	37	20786	133.8
15	27	15494	100.3
10	18	10567	70.4
5	8	4937	37.5
1	2	1495	16.6

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01AA EAN: 4058352607701	LP number 59241_24
----------------------------------	------------------------------------------------------------------	------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	108800.0	916.8
25.0	94690.0	769.0