
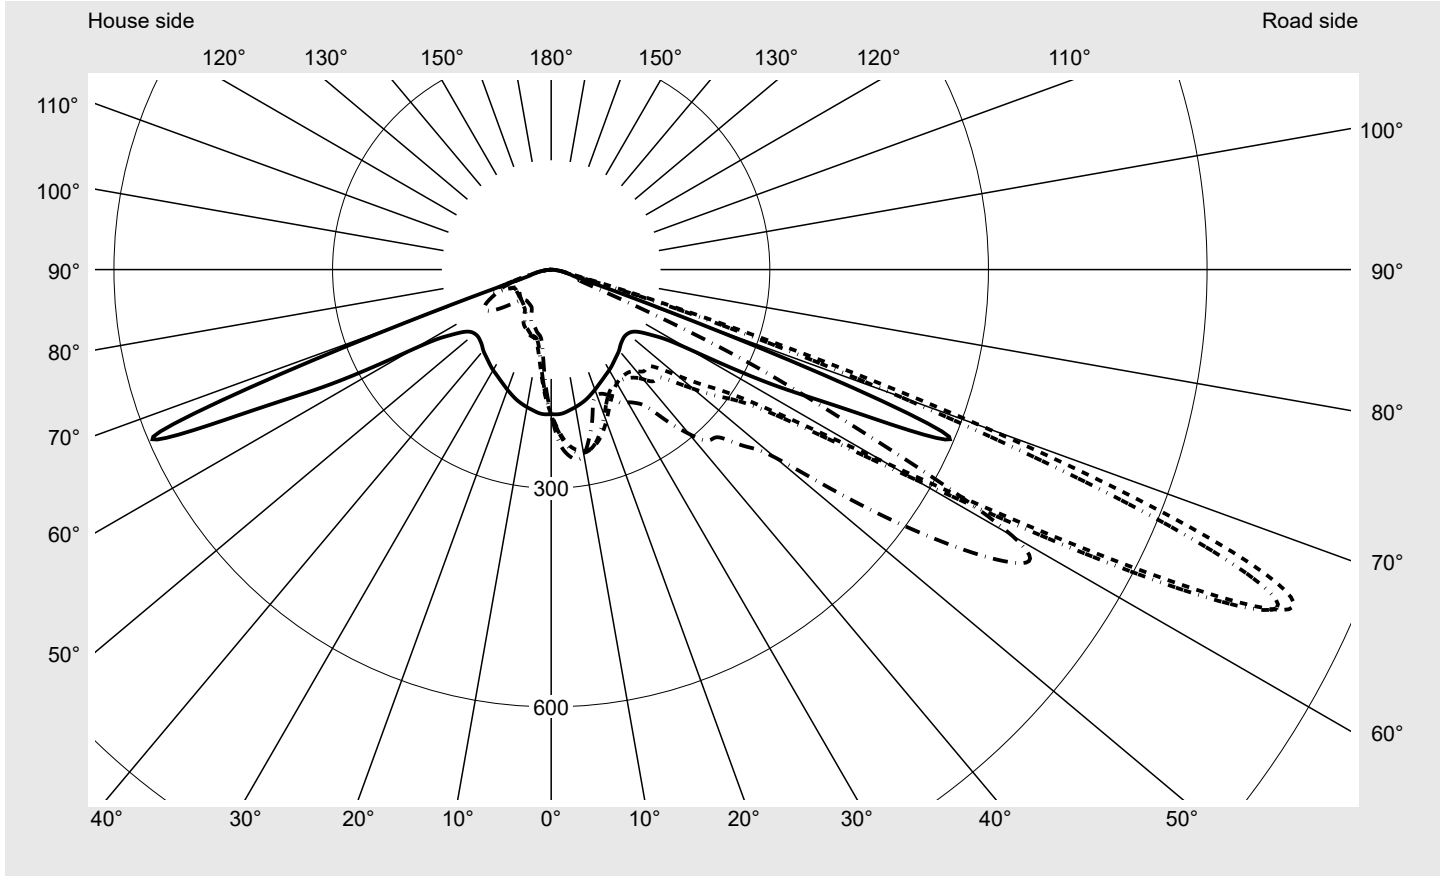


Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
	Version standard bracket Optic asymmetric distribution PL52 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 92460 lm Power consumption = 707.9 W Luminous efficacy = 130.6 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1105 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	749.2
Imax 80°	33.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

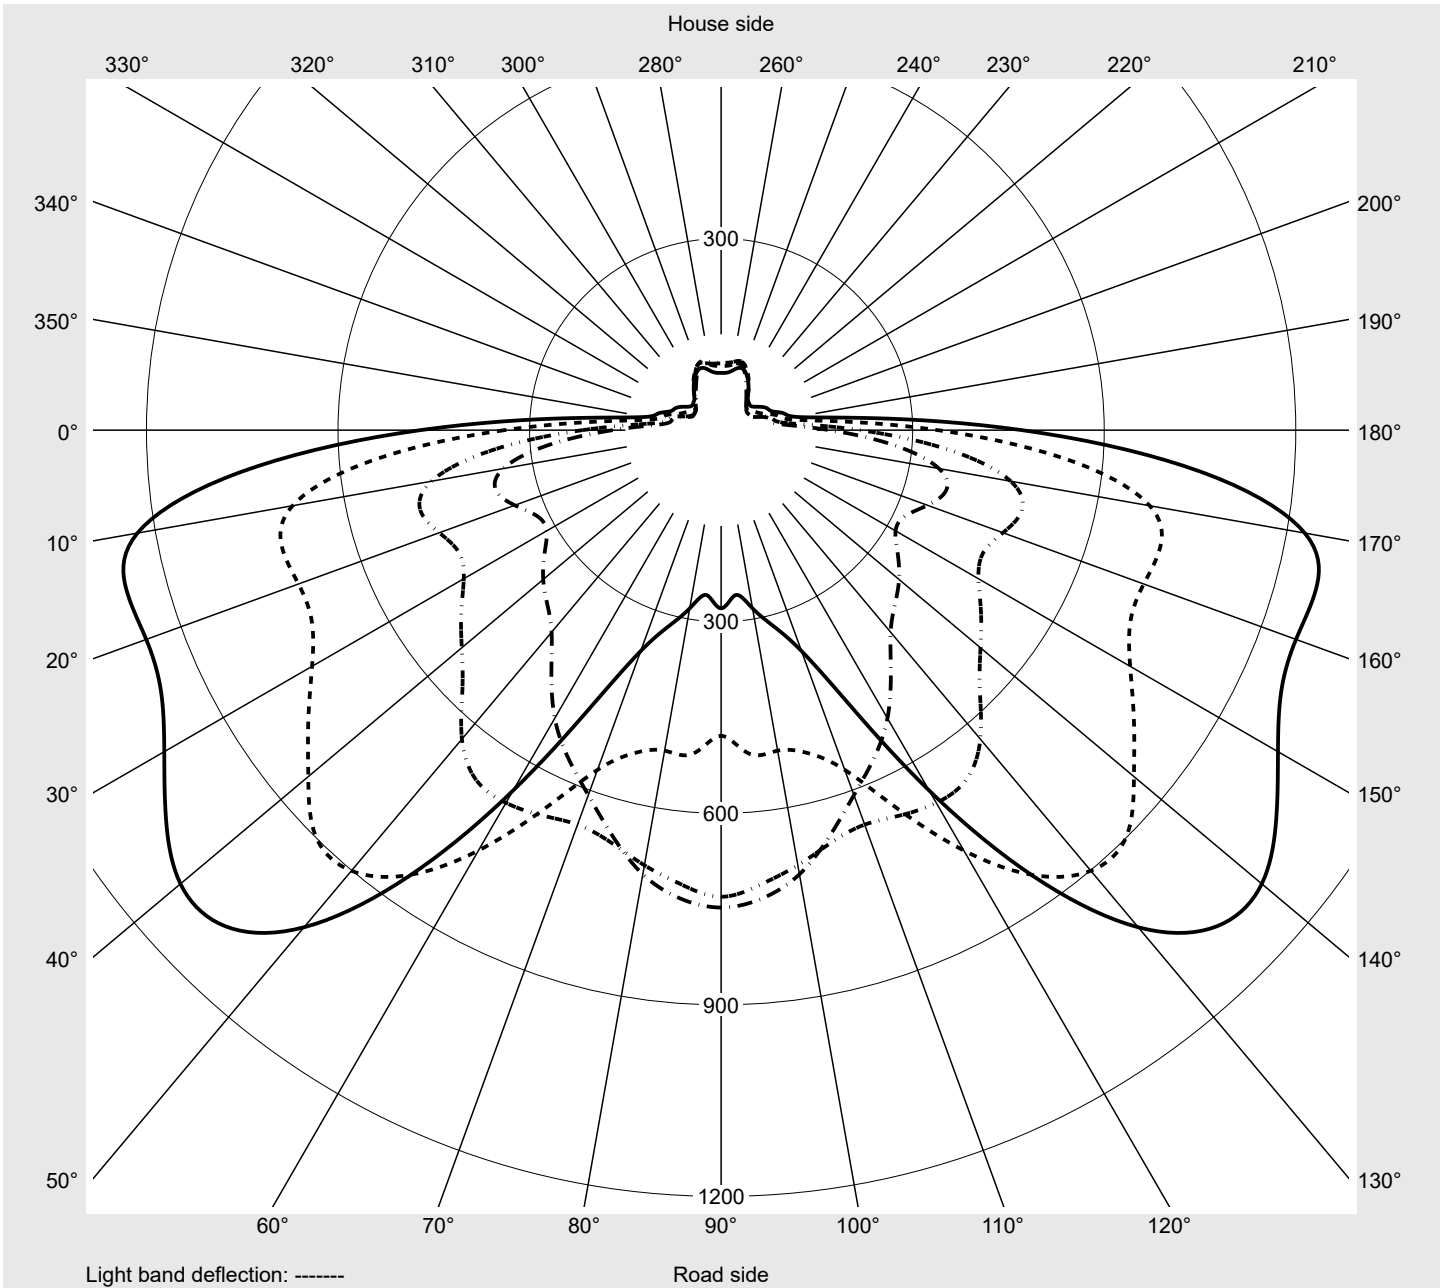

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	198.7	201.8	204.8	207.9	210.5	213.1	215.6	218.0	220.0	222.1	223.9	225.2	226.6
5,0°	197.5	203.9	210.1	215.9	221.0	226.1	230.5	234.7	238.2	241.5	244.4	246.7	248.8
7,5°	194.5	204.0	212.8	220.8	227.9	234.4	239.8	244.7	248.5	251.9	254.7	256.6	258.2
10,0°	191.6	203.6	214.7	224.5	232.6	239.7	245.3	249.8	253.0	255.4	256.9	257.5	257.7
12,5°	188.3	202.7	215.6	226.6	235.2	242.2	247.1	250.3	251.7	252.0	251.1	249.3	247.1
15,0°	184.6	201.1	215.3	227.2	236.0	242.1	245.5	246.5	245.4	242.6	238.7	234.1	229.5
17,5°	180.1	198.7	214.3	226.4	234.7	239.4	240.6	238.8	234.4	228.4	221.6	215.0	208.9
20,0°	175.5	196.0	212.6	225.0	232.3	235.0	233.5	228.5	221.2	212.9	204.8	197.9	192.3
22,5°	170.8	193.2	210.9	223.1	229.2	229.5	225.0	216.9	207.2	198.1	190.9	186.0	183.2
25,0°	166.5	190.8	209.5	221.4	226.0	223.6	216.2	205.7	195.3	187.5	183.1	181.8	182.9
27,5°	162.6	188.9	208.7	220.2	223.0	217.9	207.4	195.5	186.2	181.2	181.1	184.8	190.2
30,0°	159.3	187.6	208.7	219.9	220.9	213.2	200.6	188.1	180.3	178.9	183.9	192.4	200.6
32,5°	155.6	186.4	208.9	219.9	219.2	209.1	195.1	182.6	176.9	179.4	188.7	200.9	210.7
35,0°	151.7	185.0	209.5	220.7	218.2	205.8	190.5	178.9	176.0	182.1	194.6	208.8	219.8
37,5°	148.2	184.6	210.6	222.0	217.8	203.0	187.2	177.0	177.0	186.9	202.3	219.6	234.1
40,0°	144.9	183.9	212.1	223.7	218.0	202.1	186.1	178.0	182.1	196.4	216.1	237.1	256.9
42,5°	140.7	183.2	213.9	225.3	218.0	200.6	184.8	179.7	188.7	207.7	230.6	252.9	273.8
45,0°	137.8	184.0	217.3	228.0	217.6	196.8	179.6	176.1	187.8	209.2	234.2	258.2	278.2
47,5°	136.2	188.2	224.9	235.1	222.0	198.5	182.2	183.4	200.9	227.5	253.2	274.4	292.0
50,0°	136.9	195.8	237.5	249.0	234.0	209.5	195.4	202.1	226.1	254.5	277.3	293.1	307.0
52,5°	140.3	208.3	256.9	270.1	254.2	229.3	218.2	230.9	257.7	284.1	301.5	311.8	324.9
55,0°	150.0	230.6	289.0	303.9	285.4	259.2	250.9	267.2	293.3	315.0	328.7	342.9	377.4
57,5°	169.9	272.7	346.5	364.8	343.9	318.1	315.5	337.7	363.8	385.1	413.0	463.4	521.0
60,0°	217.5	360.1	460.5	487.4	469.7	453.2	465.4	496.9	530.3	572.9	631.6	668.8	674.0
62,5°	339.5	549.8	681.6	711.7	704.4	707.4	739.7	789.2	844.0	898.4	900.8	850.3	760.1
65,0°	471.4	756.3	928.3	964.4	958.1	967.9	1007.0	1061.4	1105.4	1098.6	1016.3	853.0	651.7
67,5°	580.5	784.3	996.7	1047.0	1038.0	1032.0	1044.8	1049.4	1010.6	915.8	763.6	561.5	403.9
70,0°	214.6	443.1	619.1	717.7	749.2	739.5	731.6	704.1	633.2	506.4	378.9	314.3	250.3
72,5°	47.8	71.8	92.0	126.4	207.8	269.5	281.4	276.1	237.2	192.6	177.4	155.1	127.9
75,0°	28.7	31.6	33.7	36.4	44.1	64.2	72.8	73.1	64.5	40.1	61.7	56.1	51.5
77,5°	21.1	22.2	23.2	24.3	26.0	28.7	29.0	28.1	26.6	26.4	28.3	28.1	28.6
80,0°	16.3	15.8	15.8	16.5	17.1	18.1	17.9	17.5	17.5	17.8	17.8	18.0	22.8
82,5°	10.4	9.7	9.8	10.2	10.3	10.5	10.7	10.3	10.3	10.3	10.1	10.1	11.6
85,0°	5.3	4.8	4.8	4.9	4.9	5.0	4.9	4.8	4.6	4.3	4.2	4.0	3.9
87,5°	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	227.8	228.9	229.7	230.2	230.5	235.4	195.7	192.6	189.5	186.4	183.3	180.4	177.7
5,0°	250.5	251.8	252.8	253.5	254.0	254.3	191.1	184.3	177.5	171.0	164.5	158.5	153.0
7,5°	259.5	260.4	261.0	261.4	261.7	262.5	184.9	174.8	164.9	155.3	146.2	138.0	130.6
10,0°	257.6	257.2	256.7	256.3	256.1	258.1	179.0	165.9	153.2	141.4	130.7	121.5	113.7
12,5°	244.8	242.5	240.5	239.0	238.3	238.7	172.8	157.2	142.3	129.2	118.1	109.5	103.1
15,0°	225.2	221.2	218.1	215.8	214.7	216.7	166.7	148.8	132.7	119.2	109.2	102.4	98.4
17,5°	203.8	199.6	196.5	194.5	193.6	191.8	159.7	140.2	123.3	110.8	102.7	98.4	96.4
20,0°	188.3	185.5	183.8	182.9	182.7	183.4	153.1	132.2	115.3	104.2	98.4	96.1	94.5
22,5°	181.8	181.2	181.4	182.1	183.0	184.5	146.4	124.6	108.3	99.1	95.4	93.6	91.3
25,0°	184.8	186.5	188.3	190.5	192.4	192.4	140.5	118.0	102.8	95.7	93.1	90.8	88.2
27,5°	194.5	196.9	199.1	202.3	204.3	206.0	134.7	111.9	98.3	92.9	90.5	87.9	85.5
30,0°	205.5	206.3	207.7	211.1	211.7	210.4	129.5	106.9	94.7	90.7	88.0	85.6	81.4
32,5°	214.6	214.1	215.3	219.3	217.5	217.2	124.3	101.9	91.5	88.2	85.5	82.6	74.4
35,0°	224.3	225.8	231.4	237.6	233.6	230.9	118.8	97.1	88.5	85.5	81.9	75.5	67.3
37,5°	242.5	248.6	257.2	261.7	261.4	262.9	113.6	92.6	85.7	83.0	75.6	67.8	63.3
40,0°	269.5	277.8	286.8	292.2	294.3	294.4	108.8	88.8	83.0	80.1	67.9	62.7	61.4
42,5°	288.1	296.4	305.4	312.4	315.9	318.3	103.7	85.1	80.7	76.5	62.5	60.1	59.5
45,0°	292.4	300.4	310.5	319.5	324.1	325.6	99.1	81.9	78.6	73.3	59.5	58.0	57.6
47,5°	307.0	315.2	326.9	341.7	349.2	358.0	95.5	79.4	76.9	70.2	57.2	56.1	56.1
50,0°	321.7	336.5	356.9	382.5	399.0	401.3	92.9	77.8	75.5	67.2	54.8	54.3	54.6
52,5°	349.2	386.2	431.6	478.4	507.7	518.9	91.7	76.8	74.7	64.5	52.7	52.4	52.9
55,0°	434.8	497.1	555.8	609.9	642.5	646.0	93.1	77.2	74.5	62.1	51.1	50.6	51.3
57,5°	566.7	608.2	657.7	706.3	736.2	747.6	99.1	79.8	75.3	60.4	50.3	49.1	49.8
60,0°	665.6	657.4	668.3	691.9	714.2	730.8	115.8	86.0	79.0	63.0	52.8	49.8	49.2
62,5°	654.2	566.1	523.5	509.6	508.8	478.7	166.6	102.4	89.9	74.1	64.4	58.1	53.1
65,0°	473.0	368.1	318.0	283.4	259.2	279.0	220.3	119.6	101.5	85.7	80.1	72.9	63.9
67,5°	303.2	234.6	127.7	94.1	83.6	72.6	142.4	96.1	89.7	82.1	80.7	77.1	70.6
70,0°	193.4	146.5	58.3	44.8	44.0	44.3	56.4	49.2	49.6	52.8	55.7	59.0	59.5
72,5°	97.7	77.0	42.5	37.4	37.6	37.8	32.8	32.2	32.2	33.2	34.5	37.6	39.2
75,0°	45.7	41.4	34.4	32.5	31.6	32.6	25.8	25.7	25.6	26.2	27.0	28.4	30.1
77,5°	30.7	31.6	27.6	23.6	22.4	21.6	20.5	19.9	19.4	20.0	20.3	21.3	22.5
80,0°	33.4	29.1	19.0	15.7	14.8	15.4	16.2	14.2	13.7	14.1	14.3	14.8	15.0
82,5°	15.5	14.5	10.2	8.8	8.3	8.3	9.7	8.6	8.7	8.8	9.0	8.8	8.7
85,0°	3.8	3.6	3.5	3.4	3.4	3.6	4.5	4.4	4.4	4.4	4.3	4.1	3.9
87,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.7	1.7	1.6	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	0.3	0.3
2,5°	175.3	172.9	170.7	168.9	167.2	165.8	164.6	163.7	163.1	162.5	162.7	2.4	2.7
5,0°	147.8	143.2	139.0	135.4	132.4	129.7	127.5	125.9	124.7	124.0	123.9	4.6	7.3
7,5°	124.0	118.4	113.7	109.9	106.8	104.4	102.6	101.3	100.4	99.8	99.6	6.7	13.9
10,0°	107.5	102.7	99.2	96.7	95.0	93.7	92.9	92.3	91.9	91.6	91.5	8.6	22.5
12,5°	98.7	95.8	94.0	92.7	91.7	90.8	90.0	89.3	88.8	88.4	88.2	10.4	32.9
15,0°	96.0	94.3	92.8	91.0	89.2	87.6	86.2	85.2	84.3	83.8	83.6	11.8	44.7
17,5°	94.9	92.9	90.4	88.0	85.9	84.1	82.6	81.5	80.7	80.1	79.9	13.0	57.8
20,0°	92.4	89.9	87.5	85.5	83.6	81.9	80.4	79.2	78.5	78.0	77.8	14.2	72.0
22,5°	88.9	86.9	85.1	83.6	81.4	77.6	75.0	73.4	72.6	72.2	72.0	15.3	87.3
25,0°	86.1	84.2	82.4	78.8	74.1	69.7	66.1	64.7	64.0	63.6	63.4	16.5	103.8
27,5°	82.2	78.7	74.9	70.8	66.1	63.3	61.7	60.3	59.2	58.5	58.2	17.8	121.5
30,0°	75.0	70.4	67.7	65.0	63.5	62.1	60.4	58.9	57.8	57.0	56.7	19.1	140.7
32,5°	67.2	65.2	64.1	63.1	62.1	60.8	59.3	57.9	56.7	56.0	55.6	20.5	161.2
35,0°	64.0	63.3	62.4	61.6	60.9	59.8	58.5	57.2	56.2	55.4	55.0	22.1	183.2
37,5°	62.5	61.7	61.0	60.3	59.8	59.1	57.9	56.7	55.7	54.8	54.4	24.0	207.2
40,0°	60.8	60.3	59.7	59.3	59.0	58.5	57.8	57.0	56.2	55.3	54.8	26.3	233.5
42,5°	59.2	59.0	58.8	58.6	58.6	58.5	58.4	58.3	57.9	57.0	56.3	28.4	261.9
45,0°	57.9	58.2	58.3	58.5	58.8	59.5	60.4	61.2	61.4	60.6	59.9	29.9	291.8
47,5°	56.9	57.7	58.4	59.0	60.2	62.1	64.4	66.4	67.2	66.9	66.3	32.5	324.2
50,0°	55.7	57.2	58.7	60.5	63.0	66.5	71.0	74.6	76.0	76.1	75.8	36.1	360.3
52,5°	54.5	56.6	59.2	62.5	67.0	73.2	80.5	85.6	87.0	87.1	86.9	41.8	402.1
55,0°	53.2	56.1	60.0	65.4	72.4	81.8	91.8	97.7	97.9	97.6	97.6	50.1	452.3
57,5°	52.1	56.0	61.4	68.9	78.7	90.8	102.4	107.7	106.0	104.7	104.5	61.7	514.0
60,0°	51.3	55.7	62.6	72.2	83.7	96.6	108.4	112.2	108.5	106.0	105.6	76.9	590.9
62,5°	52.3	56.2	63.8	74.5	86.6	98.6	108.3	109.7	104.4	101.2	100.6	94.5	685.4
65,0°	59.7	61.2	65.1	74.3	85.2	94.9	101.5	100.6	94.0	90.2	89.6	105.6	791.0
67,5°	70.8	76.7	70.4	71.4	78.8	84.4	87.9	86.4	81.3	78.6	78.3	95.5	886.4
70,0°	69.5	84.7	76.7	65.7	68.6	73.5	76.3	74.7	70.1	67.6	67.4	61.9	948.4
72,5°	47.4	61.9	61.1	56.0	57.7	60.7	61.9	59.8	55.2	53.4	54.3	24.8	973.2
75,0°	31.9	36.3	40.3	42.5	47.6	45.9	45.5	43.5	40.1	38.7	40.0	10.9	984.1
77,5°	23.8	26.0	28.0	29.4	31.1	32.7	33.1	31.2	28.5	27.1	28.0	7.0	991.0
80,0°	15.7	16.7	17.9	18.7	18.9	19.5	19.8	18.6	17.3	16.5	16.4	4.8	995.8
82,5°	8.8	9.1	9.6	9.4	9.7	10.0	9.5	8.6	7.8	7.4	7.3	2.7	998.5
85,0°	3.9	3.8	3.7	3.5	3.2	2.9	2.8	2.8	2.7	2.7	2.7	1.1	999.6
87,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779415D01BA
EAN: 4058352607725

LP number
59241_23

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	92460	707.9
95	237	87761	659.2
90	222	83328	616.0
85	206	78534	570.9
80	191	73849	528.5
75	177	69290	489.3
70	163	64620	450.2
65	150	60156	414.3
60	136	55407	375.3
55	123	50665	339.7
50	111	46183	306.8
45	99	41664	274.0
40	87	37073	240.8
35	75	32280	208.3
30	64	27889	179.0
25	52	22923	147.1
20	41	18287	118.0
15	31	14067	91.8
10	20	9263	63.1
5	9	4400	34.6
2	3	1704	18.1

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	89290	702.9
95	237	84961	654.3
90	220	80287	605.8
85	204	75754	560.8
80	189	71294	518.6
75	175	66956	479.4
70	161	62521	440.7
65	148	58169	405.1
60	134	53570	366.3
55	121	48984	330.9
50	109	44657	298.4
45	97	40218	265.9
40	85	35728	233.1
35	74	31440	203.6
30	62	26698	171.9
25	51	22229	142.9
20	40	17664	114.1
15	30	13517	88.2
10	19	8746	59.9
5	9	4362	34.3
2	3	1689	17.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779415D01BA EAN: 4058352607725	LP number 59241_23
----------------------------------	--	------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	92460.0	707.9
25.0	89290.0	702.9