


Photometric test report

Family Licross® Spot 31	Order number: 51SL627A43B EAN: 4058352865316	LP number 59381_12
	Version reflector, cover, polycarbonate, narrow distribution, luminaire housing, aluminium, silver	serial documentation 12.07.2023
	Lamps LED 4000 K CRI ≥ 90	
	Controlgear ECG Multilumen	Rated values Net luminous flux = 3650 lm Power consumption = 28.0 W Luminous efficacy = 130.4 lm/W
	Setting factory setting: DIP-Step=7	



Luminous intensity in cd/klm C180-0 **Imax: 4501 cd/klm**

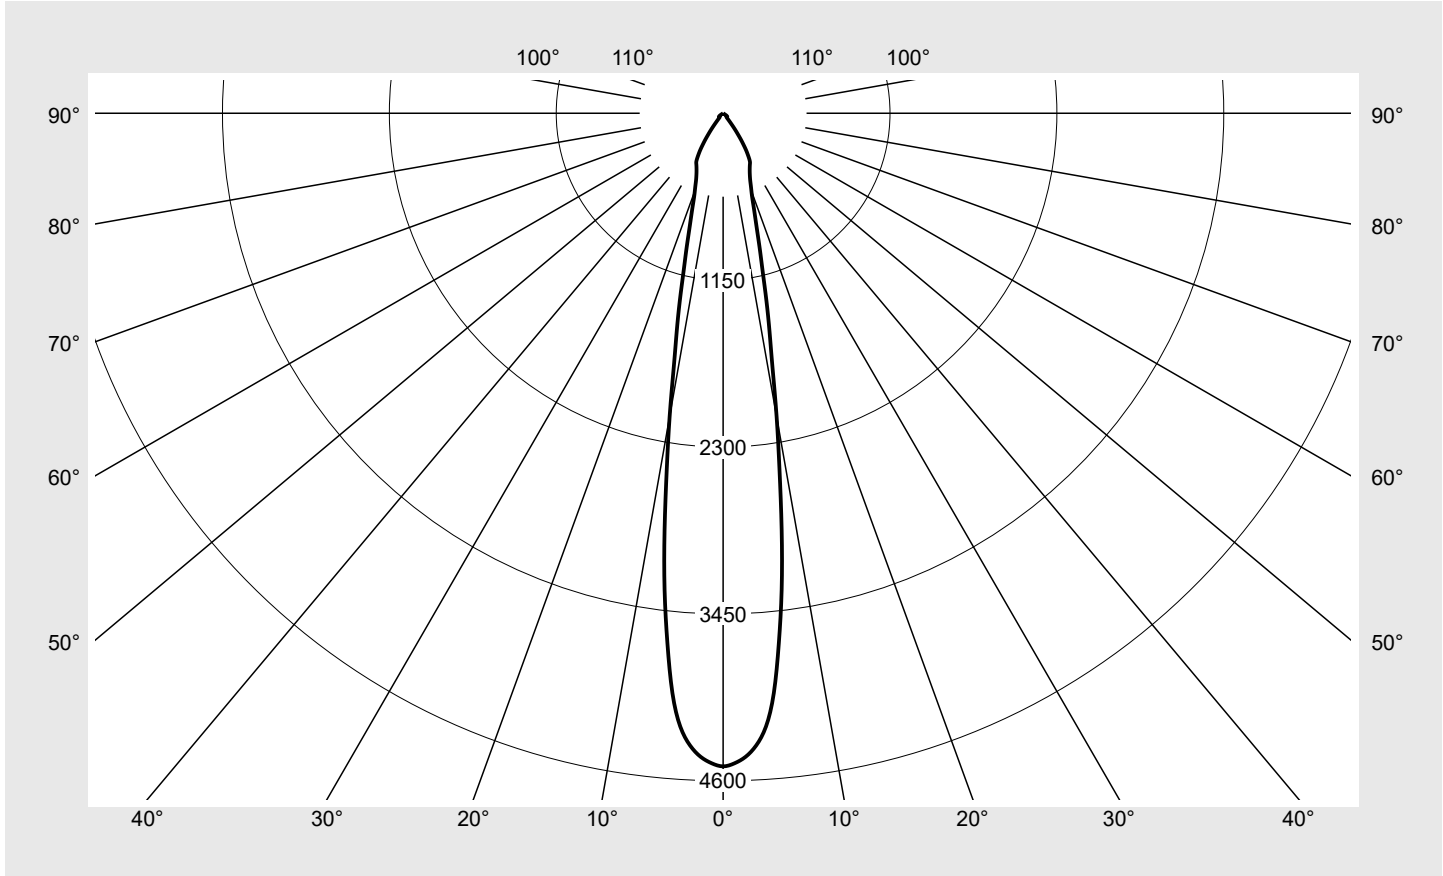

Classifications	
DIN 5040	A 7 0
CIE	N1=93 N2=97 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Spot 31	Order number: 51SL627A43B EAN: 4058352865316	LP number 59381_12
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	4500.5	1.1	1.1
1°	4480.3	8.6	9.7
2°	4437.5	17.0	26.6
3°	4362.0	25.0	51.7
4°	4236.1	32.4	84.1
5°	4010.1	38.3	122.4
6°	3672.5	42.1	164.5
7°	3309.8	44.2	208.7
8°	2898.6	44.2	253.0
9°	2482.5	42.6	295.6
10°	2122.6	40.4	336.0
11°	1782.7	37.3	373.3
12°	1538.7	35.1	408.4
13°	1327.4	32.7	441.1
14°	1130.4	30.0	471.1
15°	985.0	28.0	499.1
16°	859.9	26.0	525.0
17°	761.9	24.4	549.5
18°	683.9	23.2	572.6
19°	616.9	22.0	594.7
20°	570.3	21.4	616.1
21°	532.3	20.9	637.0
22°	498.2	20.5	657.4
23°	472.4	20.2	677.7
24°	451.2	20.1	697.8
25°	433.6	20.1	717.9
26°	418.4	20.1	738.0
27°	405.2	20.2	758.2
28°	393.9	20.3	778.5
29°	380.9	20.3	798.7
30°	356.4	19.5	818.3
31°	326.4	18.4	836.7
32°	294.9	17.1	853.8
33°	256.7	15.3	869.2
34°	220.2	13.5	882.7
35°	180.4	11.3	894.0
36°	146.1	9.4	903.4
37°	111.1	7.3	910.8
38°	79.1	5.3	916.1
39°	56.1	3.9	920.0
40°	40.9	2.9	922.8
41°	37.1	2.7	925.5
42°	35.5	2.6	928.1
43°	33.6	2.5	930.6
44°	33.1	2.5	933.2
45°	33.1	2.6	935.7
46°	32.9	2.6	938.3

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	33.1	2.7	941.0
48°	33.6	2.7	943.7
49°	34.5	2.9	946.6
50°	35.6	3.0	949.6
51°	36.2	3.1	952.6
52°	35.7	3.1	955.7
53°	33.7	2.9	958.7
54°	30.9	2.7	961.4
55°	27.6	2.5	963.9
56°	23.6	2.1	966.1
57°	21.0	1.9	968.0
58°	19.1	1.8	969.8
59°	17.3	1.6	971.4
60°	16.3	1.5	972.9
61°	15.8	1.5	974.5
62°	15.5	1.5	976.0
63°	15.1	1.5	977.4
64°	14.4	1.4	978.9
65°	14.1	1.4	980.3
66°	13.7	1.4	981.6
67°	13.0	1.3	982.9
68°	12.9	1.3	984.3
69°	12.5	1.3	985.5
70°	12.0	1.2	986.8
71°	11.4	1.2	988.0
72°	11.1	1.2	989.1
73°	10.6	1.1	990.2
74°	10.1	1.1	991.3
75°	9.5	1.0	992.3
76°	8.7	0.9	993.2
77°	7.7	0.8	994.0
78°	6.8	0.7	994.8
79°	6.5	0.7	995.5
80°	6.1	0.7	996.1
81°	5.4	0.6	996.7
82°	5.2	0.6	997.3
83°	4.8	0.5	997.8
84°	4.1	0.5	998.2
85°	3.8	0.4	998.7
86°	3.1	0.3	999.0
87°	3.1	0.3	999.3
88°	2.5	0.3	999.6
89°	2.2	0.2	999.9
90°	2.5	0.3	1000.1

Photometric test report

Family Licross® Spot 31	Order number: 51SL627A43B EAN: 4058352865316	LP number 59381_12
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.0	22.0	21.4	22.4	22.7	21.0	22.0	21.4	22.4	22.7
	3H	21.5	22.5	21.9	22.8	23.2	21.5	22.5	21.9	22.8	23.2
	4H	21.9	22.8	22.3	23.1	23.5	21.9	22.8	22.3	23.1	23.5
	6H	22.2	23.0	22.6	23.4	23.7	22.2	23.0	22.6	23.4	23.7
	8H	22.5	23.1	22.9	23.5	23.9	22.5	23.1	22.9	23.5	23.9
	12H	22.6	23.2	23.0	23.6	24.0	22.6	23.2	23.0	23.6	24.0
4H	2H	21.1	21.9	21.5	22.3	22.7	21.1	21.9	21.5	22.3	22.7
	3H	21.9	22.6	22.3	22.9	23.4	21.9	22.6	22.3	22.9	23.4
	4H	22.4	23.0	22.8	23.4	23.9	22.4	23.0	22.8	23.4	23.9
	6H	22.8	23.3	23.2	23.8	24.2	22.8	23.3	23.2	23.8	24.2
	8H	23.0	23.5	23.5	24.0	24.4	23.0	23.5	23.5	24.0	24.4
	12H	23.2	23.7	23.7	24.1	24.6	23.2	23.7	23.7	24.1	24.6
8H	4H	22.5	23.0	23.0	23.5	23.9	22.5	23.0	23.0	23.5	23.9
	6H	23.1	23.5	23.6	24.0	24.5	23.1	23.5	23.6	24.0	24.5
	8H	23.4	23.8	23.9	24.2	24.8	23.4	23.8	23.9	24.2	24.8
	12H	23.7	24.0	24.2	24.5	25.1	23.7	24.0	24.2	24.5	25.1
12H	4H	22.5	22.9	23.0	23.4	23.9	22.5	22.9	23.0	23.4	23.9
	6H	23.1	23.5	23.6	24.0	24.5	23.1	23.5	23.6	24.0	24.5
	8H	23.5	23.8	24.0	24.3	24.8	23.5	23.8	24.0	24.3	24.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	34836.1
50°	41285.2
55°	35887.5
60°	24300.7
65°	24845.7
70°	26074.1
75°	27292.0
80°	25965.3
85°	32816.9

Photometric test report


Family Licross® Spot 31	Order number: 51SL627A43B EAN: 4058352865316	LP number 59381_12
--	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

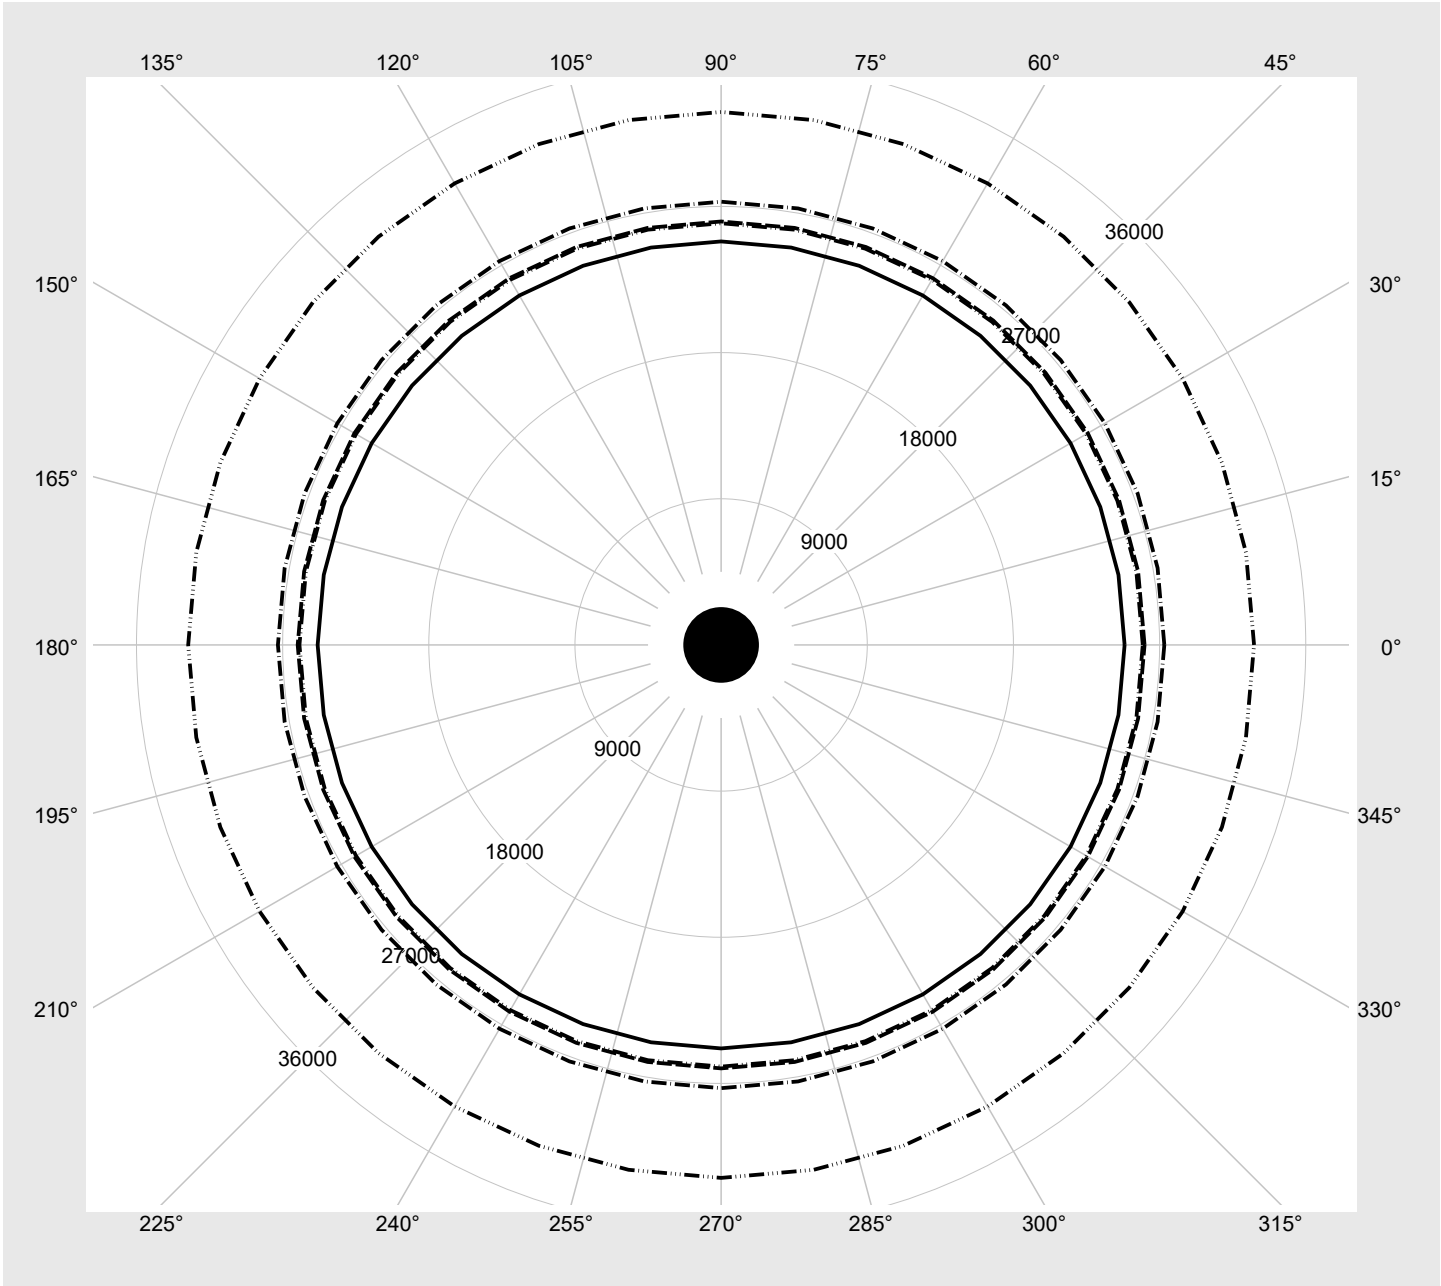

Photometric test report

Family Licross® Spot 31	Order number: 51SL627A43B EAN: 4058352865316	LP number 59381_12
--	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
7	ON	ON	ON	3650	28.0
6	OFF	ON	ON	3430	25.9
5	ON	OFF	ON	3190	23.8
4	OFF	OFF	ON	2960	21.8
3	ON	ON	OFF	2710	20.0
2	OFF	ON	OFF	2440	18.4
1	ON	OFF	OFF	2190	17.0
0	OFF	OFF	OFF	1840	15.8