


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST0.8a G) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 11210 lm Power consumption = 72.5 W Luminous efficacy = 154.6 lm/W	serial documentation 09.08.2023



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 536 cd/klm**

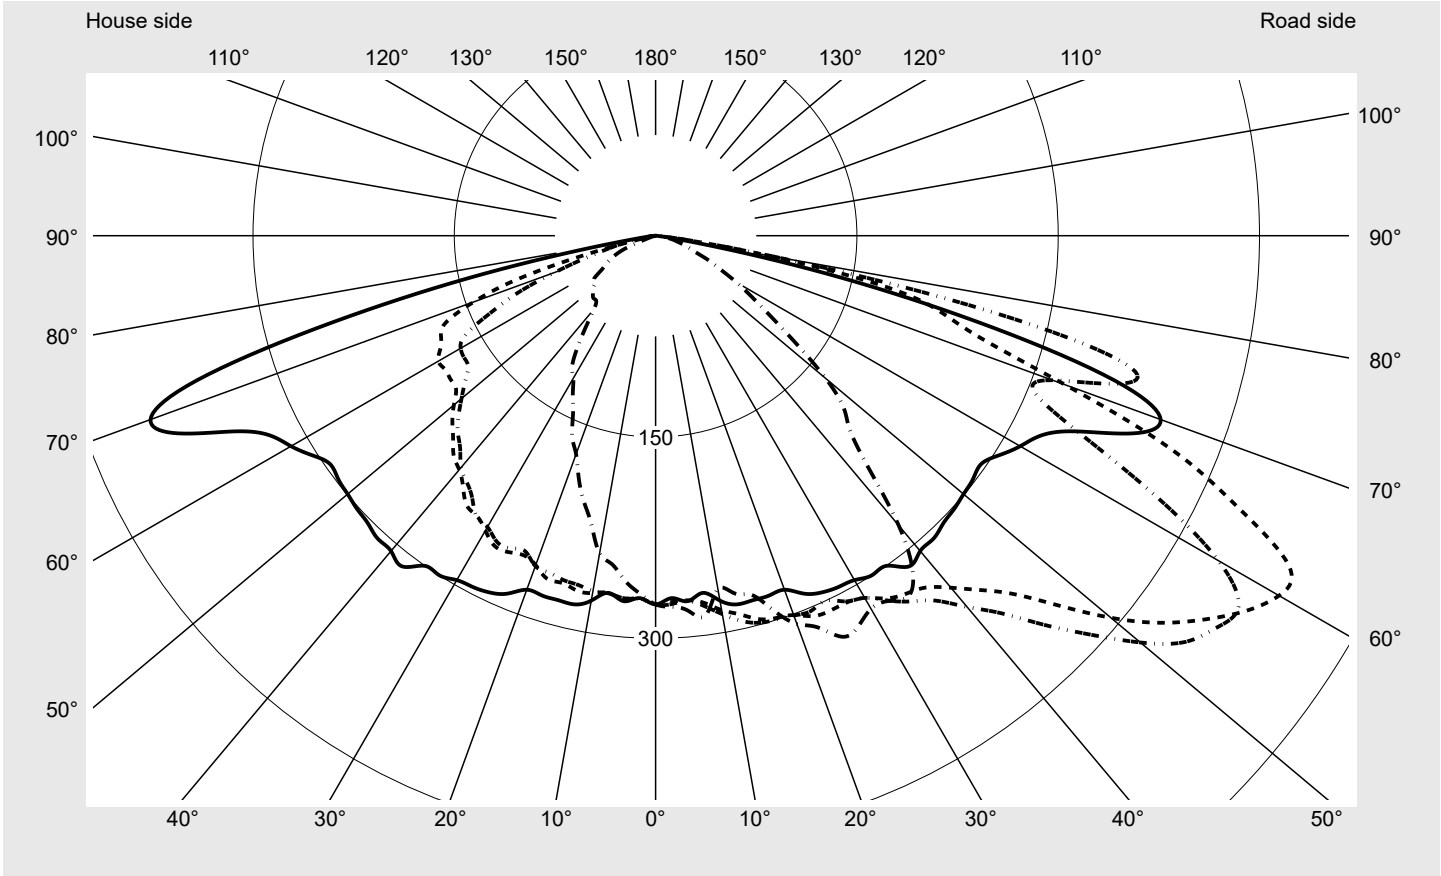

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	493.9
Imax 80°	97.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
--	--	-------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

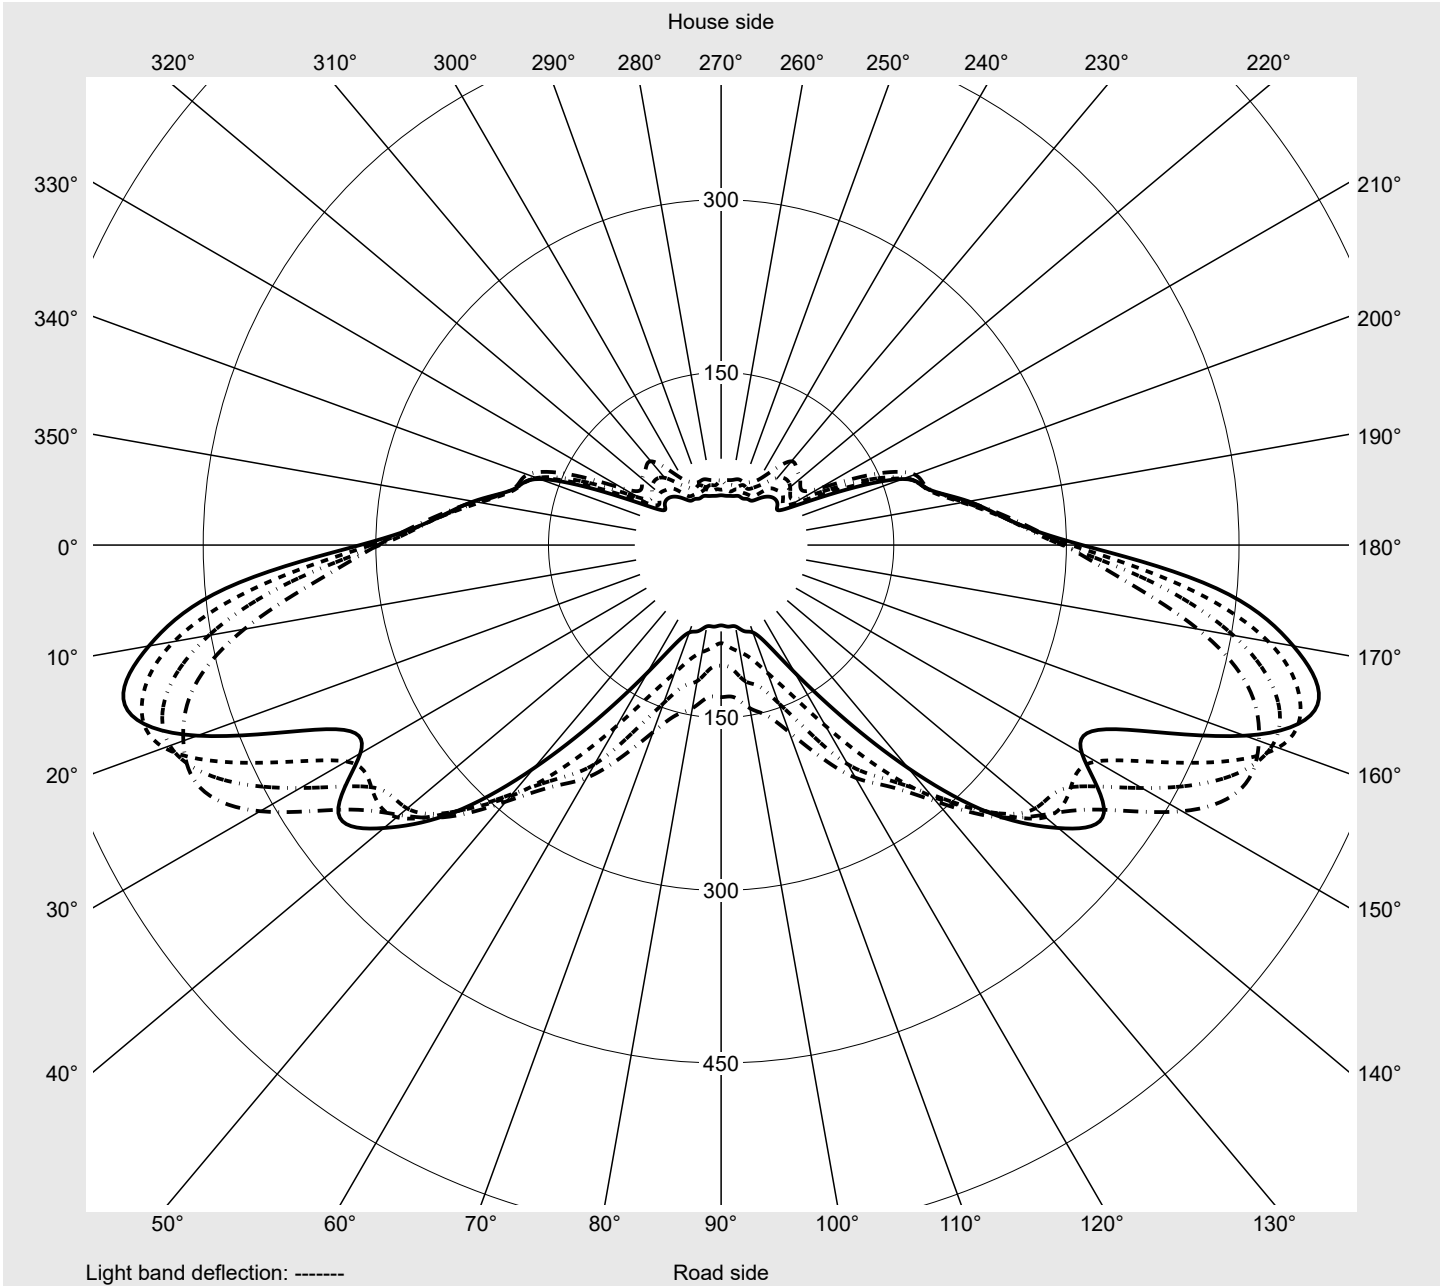

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	270.3	270.4	271.5	273.2	274.7	274.7	274.1	274.2	274.4	274.0	277.0	277.1	276.6
5,0°	273.4	274.3	273.6	272.7	273.3	272.3	273.5	276.6	278.8	280.3	282.6	283.8	283.6
7,5°	268.4	272.0	274.5	275.9	278.4	281.1	280.9	281.1	283.3	281.4	281.4	282.2	283.4
10,0°	276.1	275.9	278.7	283.3	286.3	286.9	286.0	284.7	284.2	281.9	279.6	277.1	277.3
12,5°	281.3	282.2	283.7	288.9	293.9	293.8	293.7	291.9	286.3	284.1	279.7	275.7	274.4
15,0°	281.1	288.0	292.4	295.7	298.6	296.0	289.7	288.1	284.8	282.9	277.7	276.9	276.0
17,5°	281.1	290.6	297.2	298.7	299.8	298.7	288.5	285.6	284.8	283.6	284.4	283.4	282.6
20,0°	280.7	292.1	296.6	300.8	301.1	293.8	288.4	289.1	289.4	289.7	292.3	294.8	294.6
22,5°	288.7	295.6	305.2	306.8	302.6	291.6	294.7	298.4	296.3	302.0	304.4	307.3	310.9
25,0°	293.3	302.1	310.2	308.2	300.0	304.4	300.3	306.0	314.5	315.8	322.6	327.6	328.1
27,5°	295.1	304.0	315.6	308.2	307.2	309.0	311.5	316.2	322.4	331.3	341.0	342.3	347.8
30,0°	296.3	310.5	318.6	311.7	311.7	317.3	321.0	328.4	335.1	348.1	357.8	362.2	361.1
32,5°	300.0	316.4	321.2	320.4	322.3	332.0	333.6	347.0	358.3	367.3	373.3	381.7	372.6
35,0°	300.3	319.7	321.7	325.6	332.6	343.0	357.1	367.9	377.8	390.3	388.6	387.7	369.4
37,5°	310.5	323.4	327.5	330.5	342.7	360.8	372.5	392.7	414.1	412.2	402.6	386.6	372.5
40,0°	306.7	330.8	334.6	342.4	361.1	375.6	400.5	408.6	435.7	427.5	406.4	389.1	370.1
42,5°	306.3	335.9	340.9	358.1	381.7	400.9	421.0	435.6	445.3	435.6	399.0	382.7	355.5
45,0°	303.2	331.0	352.9	377.7	410.2	434.3	445.3	455.7	442.6	423.9	389.8	341.8	303.3
47,5°	301.6	336.5	377.0	408.1	440.1	460.6	469.6	457.4	422.0	387.5	349.8	300.0	258.6
50,0°	299.6	347.6	392.2	442.9	471.5	482.6	470.8	441.6	392.0	354.8	309.2	269.5	243.1
52,5°	298.1	351.8	420.7	473.8	497.3	499.2	462.5	400.7	364.8	333.6	290.9	256.4	233.4
55,0°	296.4	377.3	452.0	498.7	509.7	480.6	422.2	367.6	356.1	327.6	282.3	247.9	219.8
57,5°	304.1	401.5	482.8	520.7	515.0	447.7	376.1	370.2	367.9	327.8	285.1	233.0	181.5
60,0°	313.7	432.1	504.8	536.4	484.2	378.6	362.0	406.0	382.5	328.5	253.1	180.4	127.9
62,5°	323.0	454.5	522.9	531.9	420.3	344.5	406.4	437.2	400.9	298.6	180.8	103.7	72.0
65,0°	344.9	474.6	534.2	478.7	349.3	355.5	461.5	463.3	369.4	197.1	86.0	60.4	50.6
67,5°	384.9	502.1	523.3	416.2	305.9	418.2	501.2	453.1	243.9	95.6	57.8	47.3	41.7
70,0°	400.5	466.7	464.5	324.8	314.9	493.9	484.0	328.4	125.6	60.9	45.2	38.8	34.8
72,5°	358.5	358.7	351.8	254.6	365.9	485.2	394.2	184.1	76.3	45.4	33.5	30.2	27.1
75,0°	248.8	218.0	225.7	220.3	356.9	392.4	267.8	98.5	34.6	31.5	29.4	24.9	21.7
77,5°	130.6	113.0	145.7	175.3	240.1	233.3	127.5	42.6	21.2	23.4	23.0	16.7	15.6
80,0°	34.5	28.3	60.6	84.1	88.8	97.8	40.6	17.8	14.2	16.4	14.0	11.1	11.6
82,5°	7.5	5.6	9.8	16.6	21.5	20.4	10.9	7.9	8.8	8.6	8.9	5.8	7.0
85,0°	1.1	1.2	1.1	1.3	1.4	1.9	2.3	2.1	2.2	2.7	3.5	2.8	2.3
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	277.3	277.3	277.6	276.6	277.0	276.8	270.8	271.1	270.4	270.8	270.2	268.3	267.7
5,0°	281.9	281.9	278.2	280.1	281.1	280.6	273.6	273.0	271.7	271.1	269.1	268.2	265.4
7,5°	283.5	282.9	281.4	281.0	282.1	285.4	268.8	268.8	268.5	268.8	266.7	267.0	264.4
10,0°	279.2	274.9	270.8	268.5	269.2	267.3	274.9	272.6	270.4	268.7	265.5	260.5	259.1
12,5°	272.1	272.1	273.6	269.2	269.2	273.1	277.7	274.5	270.9	266.6	261.3	260.1	257.8
15,0°	276.2	274.6	273.2	280.0	279.6	277.2	274.9	270.0	268.0	265.6	261.1	253.1	248.9
17,5°	285.8	287.0	285.3	286.6	289.2	292.9	272.7	272.3	268.1	263.3	259.7	253.3	247.5
20,0°	299.1	299.4	301.3	300.1	304.9	307.8	276.8	266.0	261.2	262.0	255.9	246.8	236.8
22,5°	313.3	316.0	319.4	316.6	317.2	315.9	280.7	268.4	257.6	254.4	250.0	238.1	227.3
25,0°	332.9	331.7	329.1	327.2	327.4	329.8	278.2	269.4	260.1	257.0	246.4	228.9	216.0
27,5°	347.9	343.4	339.0	334.3	330.1	327.7	279.9	264.3	260.3	256.8	239.8	225.1	209.4
30,0°	360.9	348.0	335.3	330.2	324.7	321.0	279.0	262.4	253.7	250.7	238.4	217.0	198.0
32,5°	362.6	347.1	334.4	330.4	326.1	322.8	284.1	262.1	247.8	248.2	226.8	210.6	193.3
35,0°	356.8	346.6	334.7	336.8	328.1	328.1	280.8	258.0	245.4	238.4	219.8	203.2	186.8
37,5°	357.5	341.5	333.2	324.9	314.7	314.6	279.2	255.9	235.7	231.4	214.7	193.6	178.6
40,0°	343.5	323.7	301.8	292.7	285.0	281.8	278.8	246.9	227.6	225.6	204.9	186.4	162.2
42,5°	311.3	283.7	259.6	245.5	240.5	235.1	275.8	245.2	222.6	215.5	197.8	175.8	147.6
45,0°	263.6	240.0	225.9	210.9	205.5	204.7	269.5	235.2	213.4	208.3	188.9	160.6	131.2
47,5°	233.5	212.2	205.2	196.9	185.3	190.2	264.3	230.8	205.4	199.3	173.8	140.3	115.6
50,0°	214.5	200.5	186.8	176.0	167.7	165.6	259.0	220.9	196.2	188.8	159.4	120.1	101.4
52,5°	202.4	173.0	153.3	144.0	132.9	132.1	254.9	217.3	187.5	179.0	145.3	98.1	84.8
55,0°	178.1	146.2	127.0	120.0	107.8	104.8	250.8	214.4	186.5	170.5	129.2	82.5	73.4
57,5°	142.5	118.4	102.4	94.4	89.3	85.3	251.0	212.9	185.8	169.2	115.7	71.1	65.4
60,0°	95.2	80.8	77.5	71.8	71.2	69.8	251.1	218.4	187.0	167.7	103.8	61.3	59.6
62,5°	58.0	54.8	52.2	54.7	53.3	54.6	253.1	214.1	180.6	159.5	93.9	56.2	53.4
65,0°	44.4	44.5	46.9	43.2	43.6	44.1	259.8	218.3	176.5	135.3	87.7	51.0	49.2
67,5°	38.9	35.1	35.0	34.1	33.4	32.4	277.4	228.7	169.2	111.0	72.7	44.8	40.8
70,0°	31.2	27.0	26.8	26.1	26.1	26.6	284.4	224.8	144.3	80.0	58.1	39.0	36.7
72,5°	24.4	22.5	22.5	20.4	21.1	21.5	265.5	198.7	107.9	53.5	43.1	34.7	32.8
75,0°	18.8	17.1	17.9	17.0	16.6	16.3	204.9	133.2	50.6	34.4	32.4	29.0	26.8
77,5°	14.7	13.5	12.8	12.5	12.8	12.8	119.2	54.2	11.6	23.6	21.2	18.0	18.4
80,0°	10.6	10.1	9.1	8.6	8.6	8.1	33.5	11.1	7.6	13.9	11.9	10.5	10.2
82,5°	7.3	6.2	6.1	5.6	4.9	5.4	5.5	2.7	2.8	3.8	4.3	3.5	2.3
85,0°	3.5	3.6	2.8	2.5	2.0	2.1	1.1	1.0	0.9	0.9	0.8	0.7	0.4
87,5°	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	0.4	0.4
2,5°	266.9	268.1	268.2	268.7	268.5	267.1	267.0	267.7	267.4	266.6	267.0	3.3	3.7
5,0°	263.6	262.9	262.0	260.1	259.5	259.0	256.6	256.8	259.2	257.8	258.3	6.5	10.1
7,5°	260.8	257.0	250.7	249.7	247.6	246.8	246.7	245.8	245.3	247.7	247.1	9.6	19.8
10,0°	252.8	249.3	247.8	246.7	248.4	244.5	243.4	240.2	241.8	240.9	240.4	12.7	32.4
12,5°	253.4	252.4	245.5	238.4	237.7	235.4	233.8	229.5	224.3	224.0	220.7	15.7	48.2
15,0°	244.8	237.8	231.9	225.9	220.6	215.3	208.8	208.3	207.9	205.7	205.7	18.5	66.7
17,5°	234.5	223.9	215.9	208.8	204.9	202.3	197.0	195.4	195.9	193.7	190.2	21.4	88.1
20,0°	225.2	218.0	205.4	199.6	193.3	189.7	186.4	179.5	178.4	175.2	173.3	24.2	112.4
22,5°	216.7	204.6	199.4	191.6	182.0	178.9	173.7	168.4	165.9	162.8	162.3	27.2	139.6
25,0°	204.9	195.2	187.0	178.8	174.1	164.7	158.3	153.2	148.3	147.1	145.5	30.2	169.8
27,5°	196.3	186.4	178.9	166.9	161.7	149.4	143.4	139.0	134.8	135.6	133.7	33.1	202.9
30,0°	190.9	177.5	163.1	156.2	146.5	137.9	134.3	127.6	124.1	121.6	122.6	35.7	238.6
32,5°	181.0	165.6	154.2	144.9	134.1	130.0	128.2	124.1	121.8	116.9	115.9	38.6	277.2
35,0°	167.7	157.4	146.1	134.8	131.4	126.8	124.8	120.5	110.3	104.9	101.4	41.3	318.5
37,5°	156.7	145.7	133.9	129.2	129.2	125.7	115.5	103.4	94.2	86.0	85.0	43.7	362.2
40,0°	146.9	134.3	126.9	126.3	125.9	115.4	98.8	88.6	77.3	72.8	71.3	45.3	407.5
42,5°	136.5	122.6	122.7	123.6	114.3	99.3	84.3	75.2	69.8	69.3	65.6	46.2	453.8
45,0°	120.9	117.7	119.9	119.0	104.2	85.2	72.0	67.4	65.3	64.5	65.6	46.5	500.3
47,5°	109.1	110.0	113.2	107.7	88.8	73.6	66.8	64.8	64.8	63.5	63.4	46.7	547.0
50,0°	97.5	101.6	105.2	92.5	74.5	65.6	61.9	61.6	59.1	61.3	61.0	46.7	593.7
52,5°	89.6	92.9	95.0	80.0	65.9	60.3	58.1	59.1	57.5	56.6	56.1	46.3	640.0
55,0°	78.3	80.4	76.2	65.5	57.9	54.0	55.5	52.2	52.9	52.4	56.0	45.7	685.7
57,5°	69.5	67.7	63.9	52.8	49.8	49.5	49.4	50.2	47.3	48.6	48.1	45.3	730.9
60,0°	61.6	59.4	53.6	47.0	46.1	44.6	45.2	44.1	43.4	43.0	43.3	44.1	775.0
62,5°	55.6	50.3	44.1	41.3	40.6	40.9	40.9	39.6	40.9	39.1	37.9	42.3	817.3
65,0°	46.5	42.0	38.0	35.8	35.8	36.1	35.5	33.9	31.7	32.0	31.7	40.2	857.5
67,5°	39.5	36.1	31.5	29.7	29.9	29.1	27.9	25.5	23.3	22.3	22.6	38.2	895.8
70,0°	34.2	29.3	27.2	25.7	24.5	22.3	19.1	14.7	12.3	10.1	9.4	34.5	930.3
72,5°	27.0	24.4	22.8	20.1	17.7	12.1	9.4	6.3	4.4	4.3	4.3	28.9	959.1
75,0°	21.4	18.1	16.5	13.1	8.9	5.4	3.9	2.7	2.0	1.9	2.4	21.1	980.3
77,5°	15.3	10.9	8.3	5.4	3.5	2.1	1.3	1.0	0.9	1.0	1.4	12.6	992.9
80,0°	7.1	3.9	2.2	1.4	0.8	0.5	0.4	0.4	0.3	0.4	0.4	5.2	998.0
82,5°	1.4	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	1.5	999.6
85,0°	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11210	72.5	75.7	74.1
95	241	252	10636	67.9	70.8	69.4
90	229	250	10107	63.8	66.6	65.2
85	216	248	9533	59.5	61.9	60.7
80	203	246	8959	55.3	57.5	56.4
75	190	243	8385	51.2	53.2	52.2
70	178	241	7856	47.4	49.4	48.4
65	165	238	7282	43.5	45.3	44.4
60	152	235	6708	39.7	41.3	40.5
55	140	232	6179	36.3	37.7	37.0
50	127	229	5605	32.7	34.0	33.4
45	114	225	5031	29.2	30.3	29.8
40	102	221	4502	26.0	27.0	26.5
35	89	216	3928	22.6	23.6	23.1
30	76	210	3354	19.5	20.2	19.8
25	63	203	2780	16.3	16.9	16.6
20	51	195	2251	13.4	13.9	13.6
15	38	184	1677	10.4	10.7	10.6
10	25	169	1103	7.2	7.4	7.3

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11210	71.2	73.0	72.1
95	241	252	10636	66.9	68.5	67.7
90	229	250	10106	62.9	64.5	63.7
85	216	248	9532	58.7	60.2	59.4
80	203	246	8959	54.7	55.9	55.3
75	191	244	8429	51.0	52.2	51.6
70	178	241	7855	47.1	48.2	47.7
65	165	238	7282	43.3	44.3	43.8
60	152	235	6708	39.6	40.5	40.0
55	140	232	6178	36.2	37.0	36.6
50	127	229	5605	32.6	33.4	33.0
45	114	225	5031	29.2	29.8	29.5
40	102	221	4501	26.0	26.6	26.3
35	89	216	3928	22.7	23.2	23.0
30	76	210	3354	19.5	19.9	19.7
25	64	204	2824	16.6	16.9	16.8
20	51	195	2251	13.5	13.8	13.6
15	38	184	1677	10.5	10.7	10.6
10	25	169	1103	7.2	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11210	71.7	74.8	73.2
95	241	252	10637	67.3	70.1	68.7
90	229	250	10107	63.2	65.8	64.5
85	216	248	9533	59.1	61.4	60.2
80	203	246	8960	54.9	57.0	56.0
75	190	243	8386	50.8	52.8	51.8
70	178	241	7856	47.3	49.1	48.2
65	165	238	7282	43.3	45.1	44.2
60	152	235	6709	39.6	41.1	40.4
55	140	232	6179	36.2	37.6	36.9
50	127	229	5605	32.6	33.8	33.2
45	114	225	5031	29.2	30.2	29.7
40	102	221	4502	26.0	26.9	26.4
35	89	216	3928	22.7	23.5	23.1
30	76	210	3354	19.4	20.1	19.8
25	63	203	2781	16.3	16.9	16.6
20	51	195	2251	13.5	13.9	13.7
15	38	184	1677	10.4	10.7	10.6
10	25	169	1103	7.1	7.4	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2C31Y08JB EAN: 4058352923245	LP number 59082_223
--	--	--------------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	11210.0	72.5
5.0	11210.0	71.2
15.0	11210.0	71.7