




Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN46XG EAN: 4058352903049	LP number 58520_316
	Version cover frosted, direct-/ indirect distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 6000 lm Power consumption = 32.0 W Luminous efficacy = 187.5 lm/W	serial documentation 17.08.2023





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 452 cd/klm**

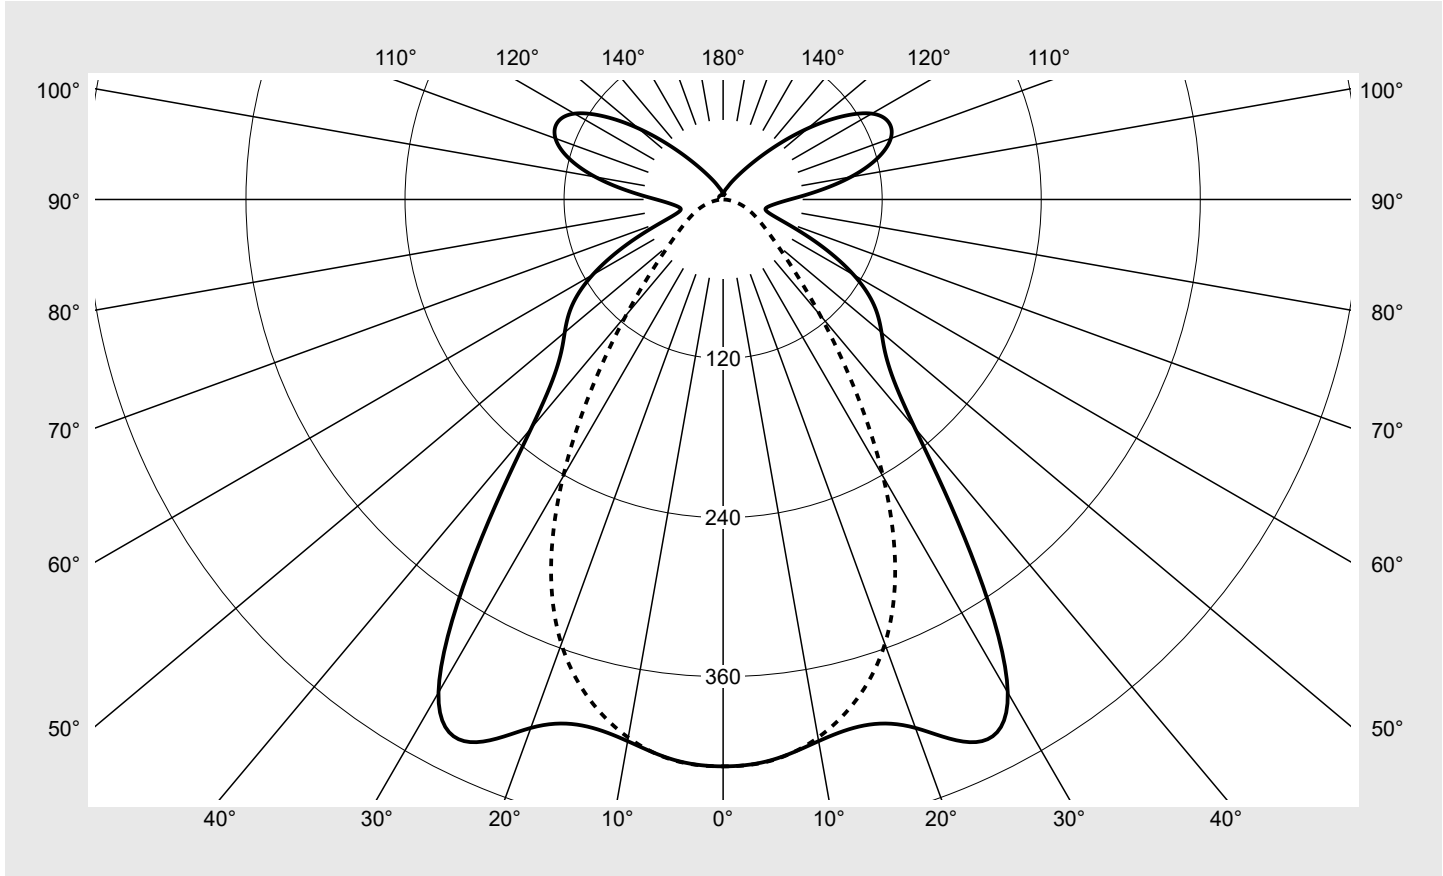

Classifications	
DIN 5040	B 5 1
CIE	N1=65 N2=88 N3=96 N4=79 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	79.3%
ϕ_o	20.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN46XG EAN: 4058352903049	LP number 58520_316
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	427.7	427.7	427.7	427.7	427.7	427.7	427.7	2.6	2.6
5°	424.4	422.4	420.2	422.1	424.3	424.4	424.8	20.2	22.8
10°	414.9	412.5	408.9	409.5	411.2	411.6	412.2	39.1	61.9
15°	410.8	406.7	398.1	393.2	390.9	389.7	390.1	56.3	118.2
20°	424.3	415.5	394.5	375.8	364.0	357.7	356.8	71.8	190.0
25°	451.7	439.9	403.9	360.3	329.2	311.6	307.2	85.9	275.8
30°	429.5	430.9	412.5	347.4	284.5	251.0	241.5	94.2	370.0
35°	325.6	344.5	379.3	329.0	231.5	183.8	171.0	89.9	460.0
40°	224.9	238.5	293.1	289.7	177.2	125.7	113.8	76.0	535.9
45°	176.4	174.8	199.5	224.7	128.0	84.3	75.7	60.6	596.5
50°	156.0	144.3	136.6	154.2	90.2	58.9	53.2	48.2	644.7
55°	139.0	122.9	98.4	99.7	63.9	43.4	39.8	38.7	683.4
60°	113.7	99.1	72.2	64.7	46.3	33.0	30.8	30.7	714.1
65°	79.7	70.2	51.6	43.8	34.5	25.6	24.0	23.0	737.1
70°	47.7	43.4	35.6	31.1	26.2	19.7	18.2	16.2	753.3
75°	33.9	31.2	26.1	23.2	19.9	14.4	12.7	12.2	765.5
80°	33.7	30.7	23.7	18.2	15.1	9.9	7.5	10.6	776.1
85°	39.3	35.6	26.3	17.2	11.4	6.2	3.2	10.7	786.9
90°	50.4	45.6	32.3	18.9	10.0	3.9	0.6	12.4	799.3
95°	71.3	63.5	42.3	22.5	11.4	4.6	1.0	16.4	815.7
100°	97.9	84.6	52.5	26.5	12.9	5.3	1.6	20.8	836.6
105°	120.7	101.7	62.6	30.2	14.2	6.1	2.4	24.4	860.9
110°	134.6	112.6	69.4	33.2	15.3	6.7	2.9	26.3	887.2
115°	137.8	115.5	72.0	34.6	16.0	7.2	3.2	26.1	913.3
120°	129.6	108.9	68.7	33.6	15.7	7.4	3.5	23.8	937.1
125°	109.1	92.2	59.5	30.3	14.7	7.4	3.7	19.5	956.6
130°	83.4	71.0	47.4	25.5	13.2	7.2	3.7	14.5	971.2
135°	58.6	50.3	35.1	20.5	11.4	6.8	3.7	10.0	981.2
140°	39.2	34.3	25.3	16.3	9.8	6.3	3.7	6.7	987.9
145°	26.6	23.8	18.6	13.0	8.2	5.4	3.7	4.4	992.3
150°	18.7	17.2	14.2	10.0	6.9	5.0	3.7	2.9	995.2
155°	13.8	12.8	10.8	7.8	6.8	4.4	3.6	2.0	997.2
160°	10.2	9.8	7.9	6.8	5.6	4.6	3.5	1.3	998.5
165°	8.2	7.8	6.5	5.6	5.0	4.1	3.7	0.8	999.3
170°	6.4	5.6	4.7	4.7	5.0	4.1	3.9	0.5	999.8
175°	4.2	3.7	4.1	4.1	4.1	4.2	4.2	0.2	1000.0
180°	3.7	3.7	3.7	3.7	3.7	3.7	3.7	0.0	1000.0

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN46XG EAN: 4058352903049	LP number 58520_316
--	--	-------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	17.3	18.6	17.9	19.1	19.8	13.5	14.8	14.1	15.3	16.0
	3H	17.9	19.0	18.5	19.6	20.3	13.9	15.0	14.5	15.6	16.3
	4H	18.1	19.1	18.7	19.7	20.4	14.1	15.2	14.7	15.8	16.5
	6H	18.3	19.2	19.0	19.9	20.6	14.3	15.2	14.9	15.8	16.6
	8H	18.6	19.4	19.3	20.0	20.8	14.2	15.1	14.9	15.8	16.5
	12H	18.9	19.6	19.6	20.3	21.1	14.3	15.1	14.9	15.8	16.5
4H	2H	17.3	18.4	17.9	19.0	19.6	14.0	15.0	14.6	15.6	16.3
	3H	18.0	18.8	18.6	19.5	20.3	14.5	15.4	15.2	16.0	16.8
	4H	18.2	19.0	18.9	19.7	20.5	14.8	15.6	15.5	16.3	17.1
	6H	18.7	19.3	19.4	20.0	20.9	15.0	15.7	15.7	16.4	17.2
	8H	19.0	19.6	19.7	20.3	21.2	15.1	15.7	15.8	16.4	17.3
	12H	19.5	20.0	20.3	20.8	21.7	15.1	15.7	15.9	16.4	17.3
8H	4H	18.2	18.8	18.9	19.5	20.4	15.0	15.6	15.7	16.3	17.1
	6H	18.8	19.3	19.5	20.0	20.9	15.4	15.8	16.1	16.6	17.5
	8H	19.3	19.7	20.0	20.5	21.3	15.5	16.0	16.3	16.7	17.6
	12H	20.0	20.4	20.8	21.2	22.1	15.6	16.0	16.4	16.8	17.7
12H	4H	18.1	18.7	18.9	19.4	20.3	15.0	15.5	15.8	16.2	17.1
	6H	18.7	19.2	19.5	19.9	20.8	15.5	15.9	16.2	16.6	17.6
	8H	19.3	19.7	20.1	20.4	21.4	15.7	16.1	16.5	16.8	17.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:		L = 1480	H(C0) = 36	H(C180) = 36
				B = 115	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		6698.4	6691.2	7825.1	9172.2	5519.9	3888.4	3771.9
50°		6231.1	5815.8	5660.2	6692.1	4170.4	2947.4	2916.0
55°		5903.6	5276.7	4360.6	4657.0	3209.5	2390.6	2444.7
60°		5197.5	4586.8	3462.6	3297.8	2570.7	2043.4	2171.4
65°		3980.1	3549.7	2720.2	2477.6	2157.5	1821.2	2004.8
70°		2642.2	2442.9	2103.1	1996.1	1885.0	1659.7	1879.3
75°		2132.4	1994.9	1767.8	1730.5	1713.4	1509.5	1731.3
80°		2467.4	2297.8	1896.0	1636.2	1626.6	1379.7	1524.0
85°		3469.6	3235.7	2594.3	1971.2	1649.2	1304.3	1297.6

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN46XG EAN: 4058352903049	LP number 58520_316
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

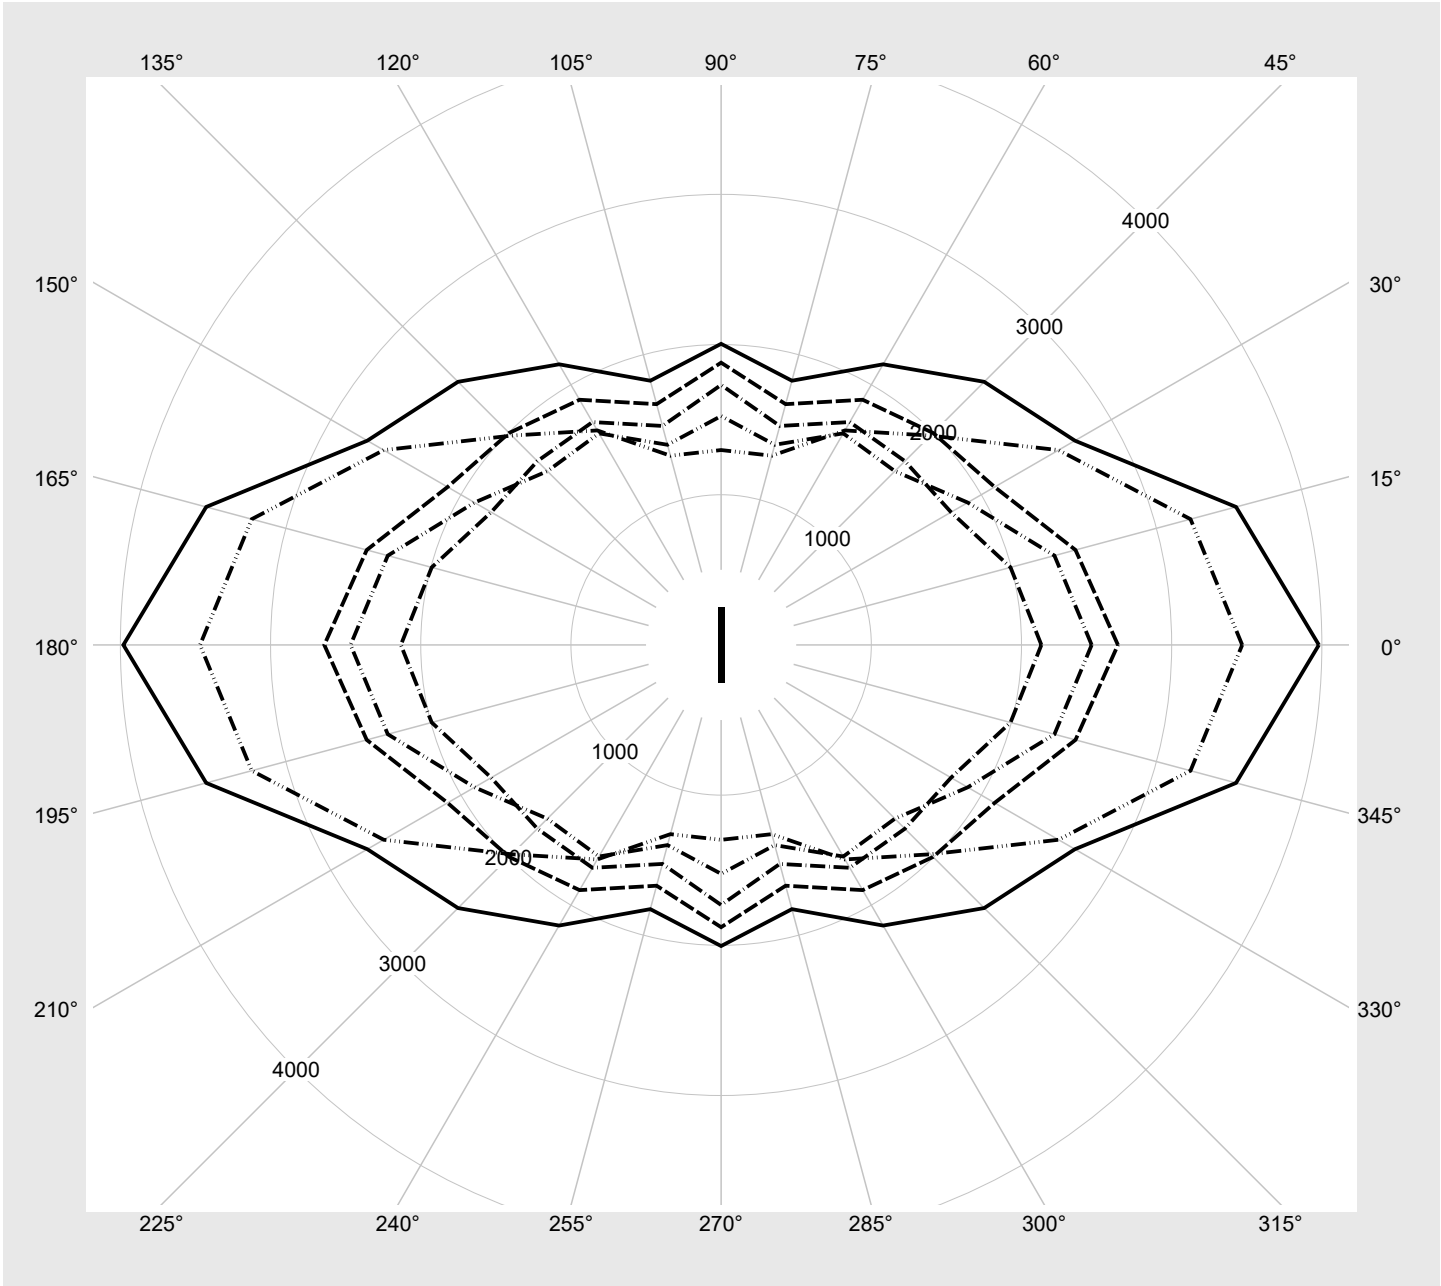

Photometric test report

Family Licross® 21 Performance	Order number: 52TD16CN46XG EAN: 4058352903049	LP number 58520_316
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	6000	32.0	38.0	35.0
2	A	C	F	5842	31.2	36.6	33.9
3	A	D	E	5611	29.9	35.4	32.6
4	A	D	F	5380	28.6	33.8	31.2
5	B	C	E	5222	27.9	32.8	30.4
6	B	C	F	4981	26.6	31.2	28.9
7	B	D	E	4823	25.7	30.3	28.0
8	B	D	F	4508	24.1	28.2	26.2