


Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
	Version standard bracket Optic asymmetric distribution PL64 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 144940 lm Power consumption = 1021.7 W Luminous efficacy = 141.9 lm/W	serial documentation 23.08.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1021 cd/klm

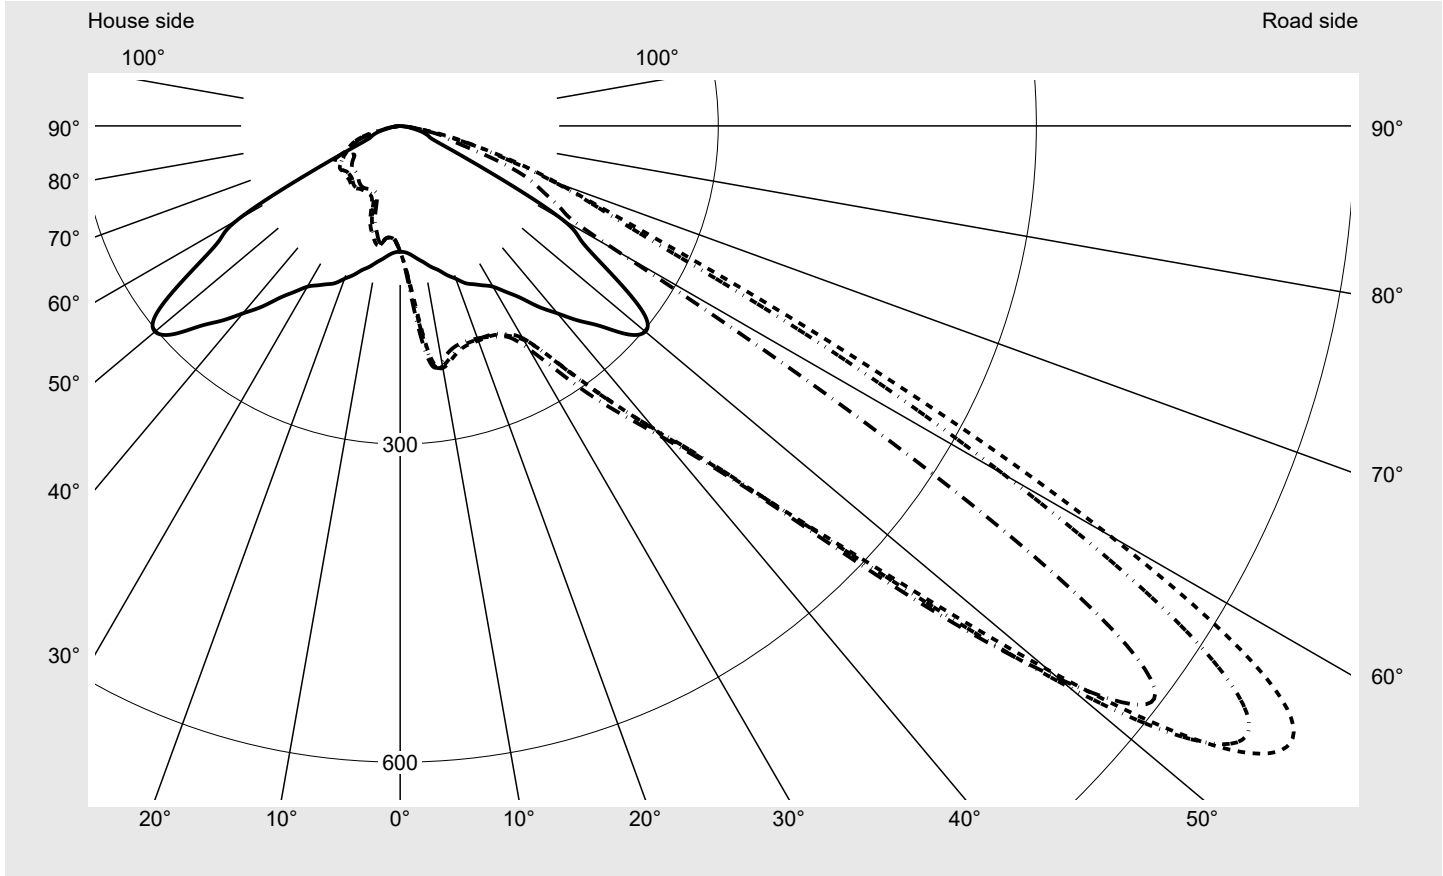

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	158.5
Imax 80°	24.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52.5°** **KMK 50°** **KMK 47.5°** **siteco**

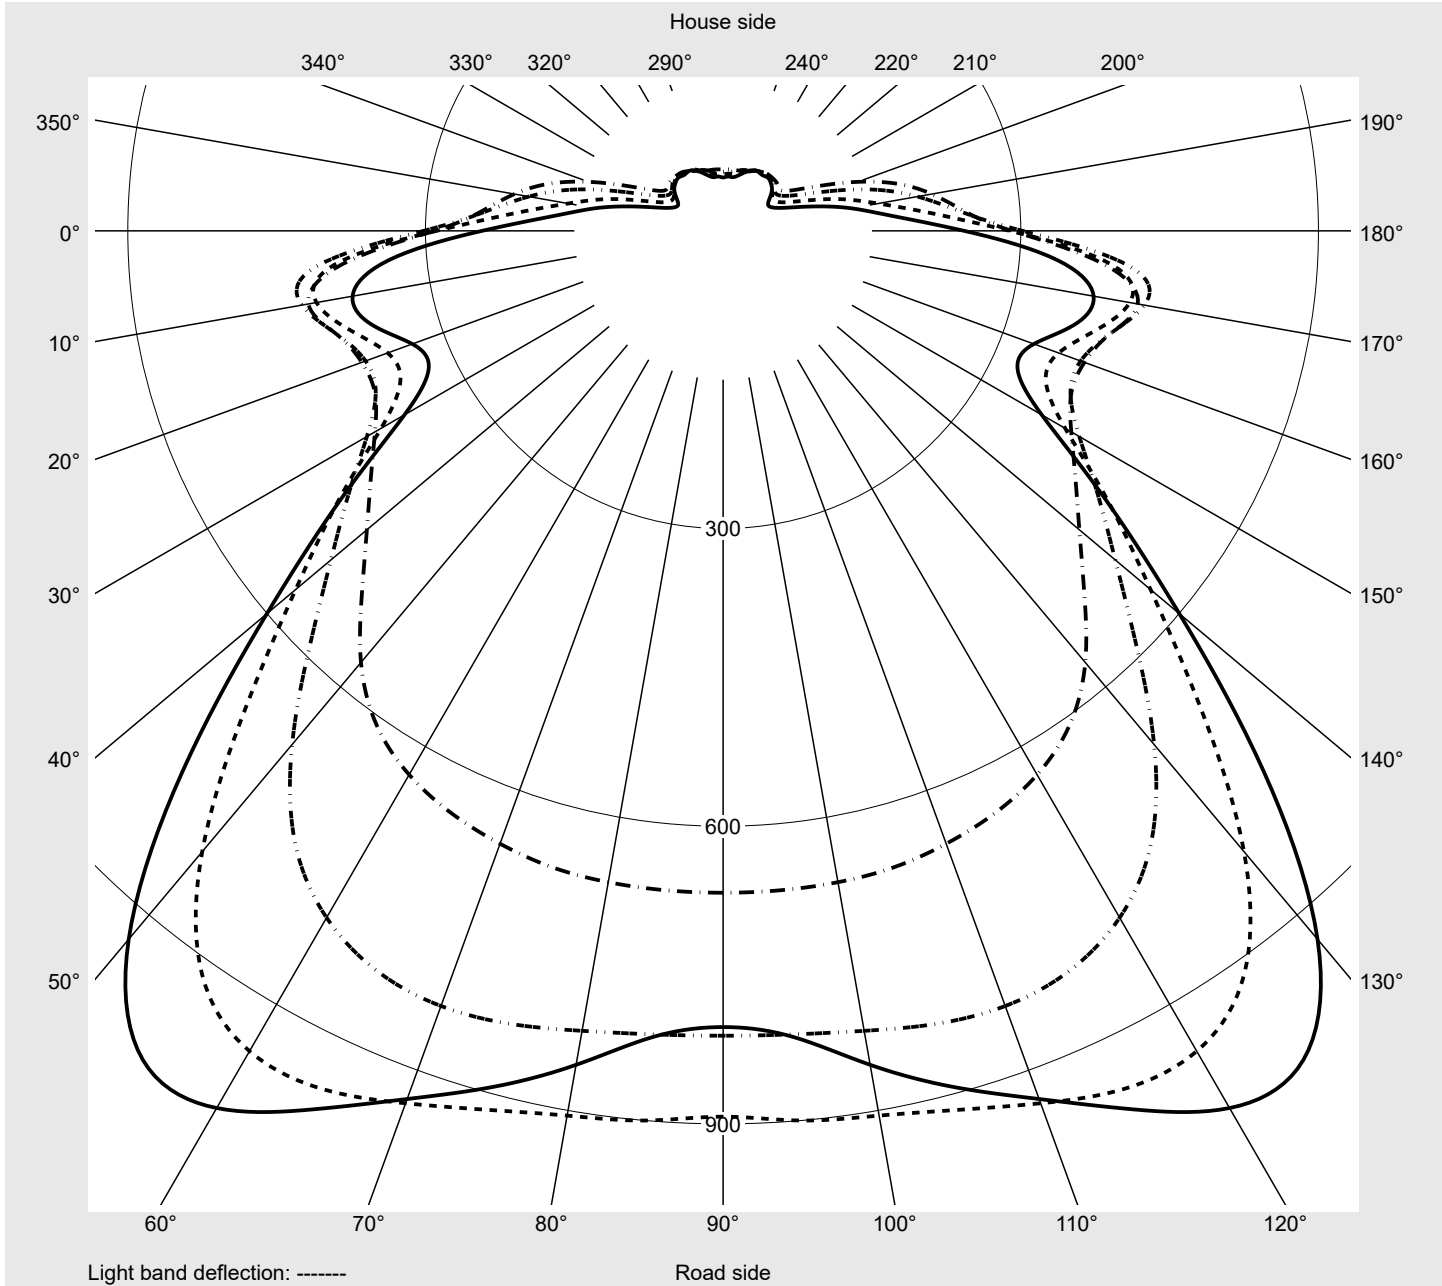

Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
---	--	-------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	119.5	120.9	122.4	124.1	125.8	127.4	129.0	130.6	132.2	133.6	134.9	135.9	137.0
5,0°	122.3	125.8	129.6	133.3	137.2	141.3	145.4	149.9	154.6	159.2	163.8	168.3	172.8
7,5°	126.5	132.0	138.1	144.5	151.3	159.4	168.6	179.1	190.2	200.5	209.2	215.6	220.2
10,0°	130.9	139.0	147.4	156.8	168.5	183.1	199.3	214.0	224.2	229.7	232.4	232.6	231.8
12,5°	136.3	146.7	157.8	172.0	191.1	212.1	226.7	234.2	236.2	234.5	231.6	228.3	225.3
15,0°	141.0	154.0	168.5	188.5	213.0	230.0	237.6	237.6	233.7	229.4	225.5	221.7	218.7
17,5°	147.6	162.6	180.1	207.1	229.0	239.2	238.8	234.4	229.6	225.5	221.6	218.4	215.9
20,0°	153.4	170.9	193.3	221.5	238.9	242.1	238.4	233.8	229.7	225.5	221.5	218.1	215.5
22,5°	160.5	179.7	207.1	234.4	245.6	244.2	241.1	237.7	233.5	228.3	223.1	218.8	215.5
25,0°	164.8	186.8	218.2	242.9	249.2	248.8	248.2	245.4	239.9	233.1	226.3	220.8	217.3
27,5°	169.6	194.1	227.7	248.3	253.8	257.5	259.1	255.6	248.6	240.1	232.1	226.6	223.3
30,0°	175.1	202.7	236.8	254.3	261.8	269.1	271.2	266.8	258.7	250.0	243.1	237.3	233.0
32,5°	185.6	216.2	250.3	266.9	276.4	284.4	285.7	279.4	271.3	265.4	260.3	255.3	254.0
35,0°	198.0	233.3	269.0	286.5	299.5	305.4	301.8	293.4	289.7	288.9	288.0	288.1	288.1
37,5°	215.2	255.7	292.3	314.0	330.8	328.0	314.6	310.7	315.3	321.3	326.6	328.3	328.4
40,0°	230.8	280.3	323.6	349.8	357.7	344.6	332.6	335.8	347.0	361.7	372.5	376.1	375.0
42,5°	249.1	308.5	362.0	378.6	371.0	360.8	358.1	365.9	384.0	406.1	425.1	432.5	430.8
45,0°	267.0	343.3	395.4	393.0	380.0	376.1	384.1	400.6	425.2	456.4	489.1	508.7	514.6
47,5°	290.9	385.2	424.4	403.1	387.5	387.2	405.2	433.4	468.7	514.7	567.8	608.5	632.9
50,0°	301.8	411.6	431.0	402.8	383.5	386.3	414.5	460.4	516.0	588.4	675.8	752.3	799.3
52,5°	288.8	393.5	416.1	388.3	359.8	358.9	398.1	473.0	562.4	681.0	816.7	915.4	954.6
55,0°	242.9	338.1	379.2	366.2	333.3	327.3	370.8	469.1	600.3	770.6	932.0	1019.8	1020.8
57,5°	203.2	264.4	322.8	325.6	307.1	308.2	353.7	473.3	645.9	816.0	952.7	1011.0	967.8
60,0°	176.9	218.8	282.7	301.7	302.6	320.1	369.6	512.6	680.9	794.2	870.1	863.1	772.6
62,5°	100.6	147.9	213.6	250.4	276.8	321.6	416.7	580.8	682.3	701.5	658.3	589.3	526.4
65,0°	52.2	75.3	126.0	166.1	202.5	264.7	379.0	503.6	557.9	482.0	403.1	361.8	327.9
67,5°	33.4	45.5	77.7	114.5	140.6	173.8	233.5	302.4	314.1	261.9	219.3	214.6	215.7
70,0°	28.7	34.1	45.8	69.0	93.0	107.1	129.9	149.4	153.2	125.9	115.4	137.6	158.5
72,5°	25.2	28.2	29.2	34.1	48.0	59.5	67.5	60.0	40.3	46.0	63.2	93.8	115.2
75,0°	20.6	22.2	23.2	28.6	30.2	39.7	42.5	26.8	29.1	36.0	44.1	60.6	76.0
77,5°	14.1	15.7	16.9	21.3	23.0	28.4	27.9	21.0	21.6	26.1	29.9	41.2	49.7
80,0°	9.2	10.0	12.2	14.4	17.3	18.2	18.2	15.6	14.4	17.4	17.5	22.6	24.0
82,5°	5.5	6.1	8.1	9.6	11.7	12.6	11.7	10.1	8.6	9.8	9.7	9.9	10.0
85,0°	2.5	3.0	4.2	5.3	6.0	6.3	5.6	4.6	3.6	2.8	2.7	2.8	3.0
87,5°	0.9	1.1	1.3	1.4	1.5	1.4	1.2	1.0	0.9	0.8	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	138.0	138.7	139.3	140.0	140.8	140.9	117.9	116.5	115.3	114.2	113.1	112.3	111.5
5,0°	176.8	180.1	183.0	185.2	187.0	187.5	119.2	116.4	114.1	112.2	110.6	109.4	108.5
7,5°	223.1	225.2	226.1	226.7	227.2	227.5	121.5	117.5	114.4	112.0	110.5	109.5	108.6
10,0°	230.2	228.7	227.2	226.2	225.6	225.7	124.0	118.8	115.2	113.0	111.5	110.5	109.9
12,5°	222.6	220.6	218.9	217.8	217.0	217.1	127.0	120.4	116.4	114.3	113.1	113.5	115.7
15,0°	216.5	215.1	214.1	213.3	212.9	213.3	129.6	121.8	117.7	115.8	116.6	119.5	120.5
17,5°	214.4	213.4	212.7	212.3	212.1	212.5	133.2	124.3	119.9	119.3	122.7	123.3	120.9
20,0°	214.1	213.6	213.2	213.0	213.1	213.3	137.1	127.4	123.4	126.6	126.9	123.9	116.6
22,5°	214.3	214.4	214.7	215.0	215.1	215.5	141.6	131.5	130.1	133.5	129.8	121.1	112.4
25,0°	216.2	216.9	218.0	218.7	219.0	219.2	144.8	135.6	139.1	137.9	129.9	118.0	107.7
27,5°	221.4	221.4	222.7	224.2	224.9	225.3	148.8	141.1	148.2	141.8	128.2	114.5	99.6
30,0°	231.3	233.0	236.6	240.1	242.2	243.1	154.8	149.7	156.9	144.7	125.6	108.0	89.9
32,5°	254.6	257.7	262.7	267.4	270.4	271.7	164.4	162.0	166.2	147.7	123.8	99.9	84.5
35,0°	289.2	292.3	297.4	302.4	305.8	307.3	176.3	176.8	173.6	149.1	120.8	94.1	82.0
37,5°	329.5	331.1	334.3	338.5	341.3	342.6	189.7	187.5	178.7	151.6	120.7	94.9	82.2
40,0°	373.3	373.3	375.2	378.3	380.7	381.9	201.5	195.6	181.9	155.8	121.6	97.2	83.0
42,5°	427.9	427.5	429.7	432.8	434.9	435.9	213.0	203.0	186.2	161.1	124.4	97.5	82.2
45,0°	515.9	516.7	519.4	522.7	524.5	524.6	228.5	211.1	186.6	157.6	119.9	91.7	77.6
47,5°	647.7	657.3	664.1	666.6	667.1	667.1	241.9	213.6	182.8	144.4	107.2	82.1	71.3
50,0°	823.6	831.4	827.5	818.7	812.9	811.2	237.2	198.9	160.0	117.9	86.6	70.6	65.1
52,5°	954.4	935.7	917.1	905.4	900.0	892.7	208.7	158.6	123.3	89.3	68.1	60.6	60.6
55,0°	976.9	931.1	893.0	853.5	815.6	802.4	171.6	131.0	95.0	68.3	55.6	52.4	57.3
57,5°	866.1	761.2	674.8	597.6	539.1	514.3	155.1	115.7	79.1	56.8	48.7	47.5	53.9
60,0°	657.6	553.5	435.7	331.3	258.5	238.3	137.5	95.3	65.7	50.4	43.4	44.7	50.5
62,5°	454.3	354.9	248.8	185.2	174.2	172.9	91.7	61.1	55.6	46.0	39.3	39.9	45.7
65,0°	283.3	224.2	165.4	154.7	151.8	150.6	55.4	44.9	47.1	42.1	36.8	36.0	39.7
67,5°	203.8	163.6	142.4	137.1	134.0	131.8	39.2	38.4	38.9	37.8	35.3	33.6	35.9
70,0°	154.3	127.7	119.4	113.4	105.6	101.9	29.8	33.0	35.2	34.9	32.9	30.9	33.4
72,5°	107.0	89.2	82.5	76.1	68.1	64.5	24.7	26.7	29.6	29.3	27.7	26.7	28.3
75,0°	73.6	60.1	54.2	53.5	49.0	46.2	21.4	23.0	23.8	23.4	22.6	21.8	21.8
77,5°	43.5	36.8	35.5	41.0	40.5	37.4	15.8	17.8	17.7	16.9	17.1	16.0	15.3
80,0°	22.6	21.6	21.1	23.7	20.1	17.7	10.0	11.6	11.6	11.4	11.2	10.3	9.6
82,5°	9.7	9.3	9.3	9.6	7.9	7.0	5.9	6.6	7.0	7.0	6.5	5.9	5.5
85,0°	2.9	2.8	2.5	2.4	2.3	2.3	2.8	3.2	3.6	3.2	3.0	2.9	2.6
87,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	0.2	0.2
2,5°	110.8	110.2	109.6	109.2	108.8	108.5	108.3	108.2	108.1	107.7	107.7	1.5	1.6
5,0°	107.8	107.2	106.7	106.4	106.0	105.7	105.5	105.4	105.2	105.0	104.9	3.2	4.8
7,5°	107.8	107.1	106.8	106.9	107.4	107.9	108.5	109.0	109.3	109.4	109.3	5.4	10.2
10,0°	110.4	111.9	113.3	113.9	114.3	114.1	113.5	112.9	112.3	111.8	111.4	7.6	17.8
12,5°	117.2	117.6	116.5	114.2	111.2	108.5	106.4	104.7	103.5	102.6	102.2	9.6	27.4
15,0°	119.4	115.6	111.1	107.2	103.5	100.3	97.6	95.5	93.8	92.6	92.0	11.4	38.8
17,5°	115.0	109.5	104.3	99.2	93.8	88.0	82.5	78.0	75.0	73.3	72.6	13.1	51.9
20,0°	109.9	103.3	95.5	86.2	78.0	72.9	70.2	68.6	67.6	67.0	66.7	14.9	66.8
22,5°	104.0	93.0	81.4	74.7	71.6	69.7	68.3	67.3	66.5	66.0	65.8	16.7	83.5
25,0°	94.5	81.7	75.5	72.3	70.4	69.0	68.0	67.2	66.6	66.1	65.9	18.7	102.3
27,5°	85.0	77.8	73.8	71.4	70.0	69.2	68.6	67.9	67.4	67.0	66.8	20.9	123.1
30,0°	80.9	76.0	72.9	71.0	70.0	69.5	69.1	68.5	68.0	67.6	67.6	23.4	146.5
32,5°	78.2	74.6	72.3	71.0	70.5	70.3	69.7	68.9	68.2	67.7	67.5	26.6	173.1
35,0°	76.1	73.5	72.5	72.4	72.0	71.2	70.0	68.6	67.5	66.7	66.3	30.5	203.6
37,5°	75.6	73.3	73.4	73.8	73.0	71.1	69.0	67.1	65.5	64.6	64.3	35.1	238.7
40,0°	76.1	74.0	73.9	74.0	72.1	69.3	66.7	64.3	62.8	62.1	61.7	40.2	279.0
42,5°	76.9	74.8	73.9	72.8	70.4	67.2	64.6	62.9	61.7	61.1	60.9	46.2	325.2
45,0°	75.7	74.6	73.0	72.0	69.6	66.4	63.8	62.4	61.3	60.7	60.5	53.7	378.9
47,5°	72.1	72.9	72.8	72.1	69.5	66.2	63.7	62.7	62.6	62.2	61.9	63.4	442.3
50,0°	67.2	71.2	72.5	71.6	69.5	66.6	65.2	63.1	60.8	59.8	59.6	73.9	516.3
52,5°	64.4	69.3	71.6	70.8	69.2	68.2	63.9	60.6	58.3	57.8	57.1	81.7	597.9
55,0°	64.2	68.0	70.0	68.7	69.4	67.3	62.5	57.6	54.9	55.0	53.8	83.2	681.1
57,5°	62.3	67.1	67.2	66.0	66.6	65.8	60.2	55.2	52.9	52.6	51.1	76.1	757.2
60,0°	57.3	64.1	64.3	62.2	63.1	63.2	58.7	54.8	53.1	55.2	56.2	65.5	822.7
62,5°	51.2	57.8	61.2	58.7	58.9	59.2	57.8	56.8	62.8	70.0	69.3	53.9	876.6
65,0°	46.0	50.6	55.4	54.9	54.3	55.7	57.4	66.3	66.7	59.9	56.9	40.4	917.0
67,5°	39.9	43.1	46.6	48.3	49.4	51.9	60.8	65.3	58.0	53.0	50.7	28.1	945.1
70,0°	33.8	34.3	37.9	40.4	42.2	47.5	59.1	60.1	51.6	47.0	45.7	19.5	964.6
72,5°	26.5	26.0	26.8	30.1	34.3	41.5	47.9	49.8	43.4	38.3	37.0	12.6	977.3
75,0°	20.0	17.9	19.3	21.6	25.3	33.0	36.3	36.9	34.0	30.0	28.4	9.1	986.4
77,5°	13.7	12.6	13.0	14.9	17.2	22.7	24.4	24.6	24.0	21.6	19.8	6.5	992.8
80,0°	8.4	8.1	8.4	9.3	10.4	12.2	13.9	14.2	14.0	13.2	12.2	3.9	996.8
82,5°	4.9	4.6	4.7	5.2	5.6	6.0	6.8	6.8	6.5	6.2	5.7	2.1	998.9
85,0°	2.4	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	0.8	999.7
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
----------------------------------	--	------------------------------

siteco

Dimming levels table

environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	144058	1013.8
95	238	252	137735	957.3
90	223	249	130642	897.0
85	208	247	123429	836.9
80	193	244	115843	776.8
75	179	241	108619	721.0
70	165	238	101238	665.4
65	152	235	94310	614.4
60	139	232	87170	563.1
55	126	228	79883	512.3
50	113	224	72389	461.5
45	101	220	65317	415.2
40	89	216	58062	368.4
35	77	210	50679	322.6
30	66	205	43660	280.6
25	54	197	36010	235.1
20	43	189	28883	194.5
15	32	178	21761	148.1
10	21	163	14424	102.5
5	10	136	6978	55.4
1	3	91	1942	27.7

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
95	236	251	133300	942.7
90	221	249	126568	882.7
85	206	246	119672	822.7
80	192	244	112780	767.0
75	177	241	105316	707.7
70	163	238	98262	652.3
65	150	235	91539	601.7
60	137	232	84616	550.9
55	124	228	77537	500.4
50	111	224	70174	450.1
45	99	220	63302	403.8
40	87	215	56154	357.7
35	75	209	48963	312.2
30	64	204	42071	270.7
25	53	197	35062	229.3
20	42	188	28064	189.0
15	31	177	21000	141.9
10	21	163	14355	101.5
5	10	136	6955	54.8
1	3	92	1937	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779116V01AA EAN: 4058352960516	LP number 59472_14
----------------------------------	--	------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	144940.0	1021.7
25.0	133460.0	944.1