




Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution with an additional rear light component (ST1.0ST0.5) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ - DALI2 Rated values Net luminous flux = 3480 lm Power consumption = 22.7 W Luminous efficacy = 153.3 lm/W	serial documentation 28.09.2023





Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 633 cd/klm**

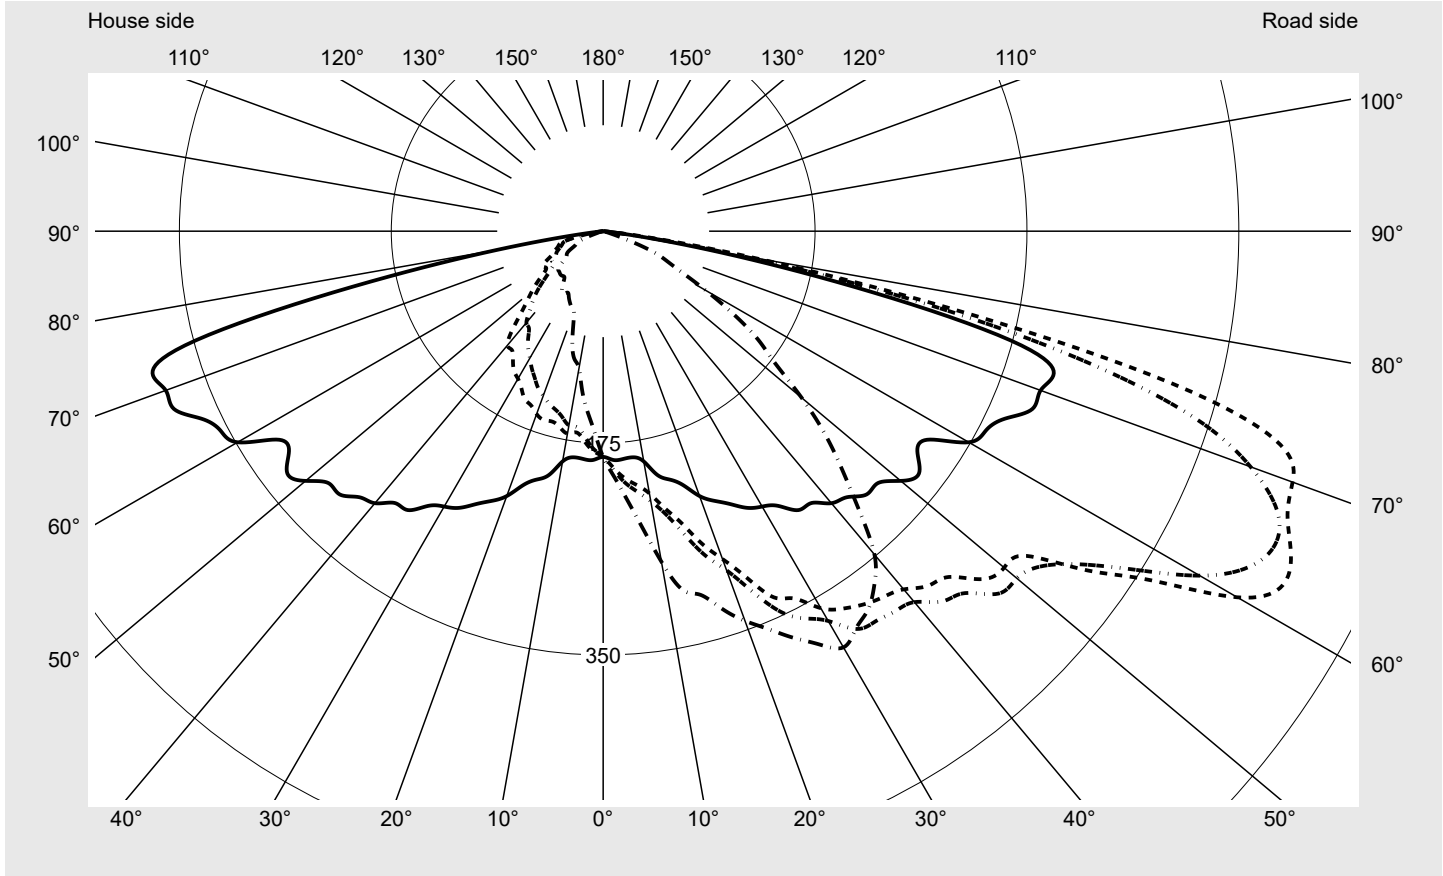

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G2
Imax 70°	629.2
Imax 80°	139.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
--	--	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

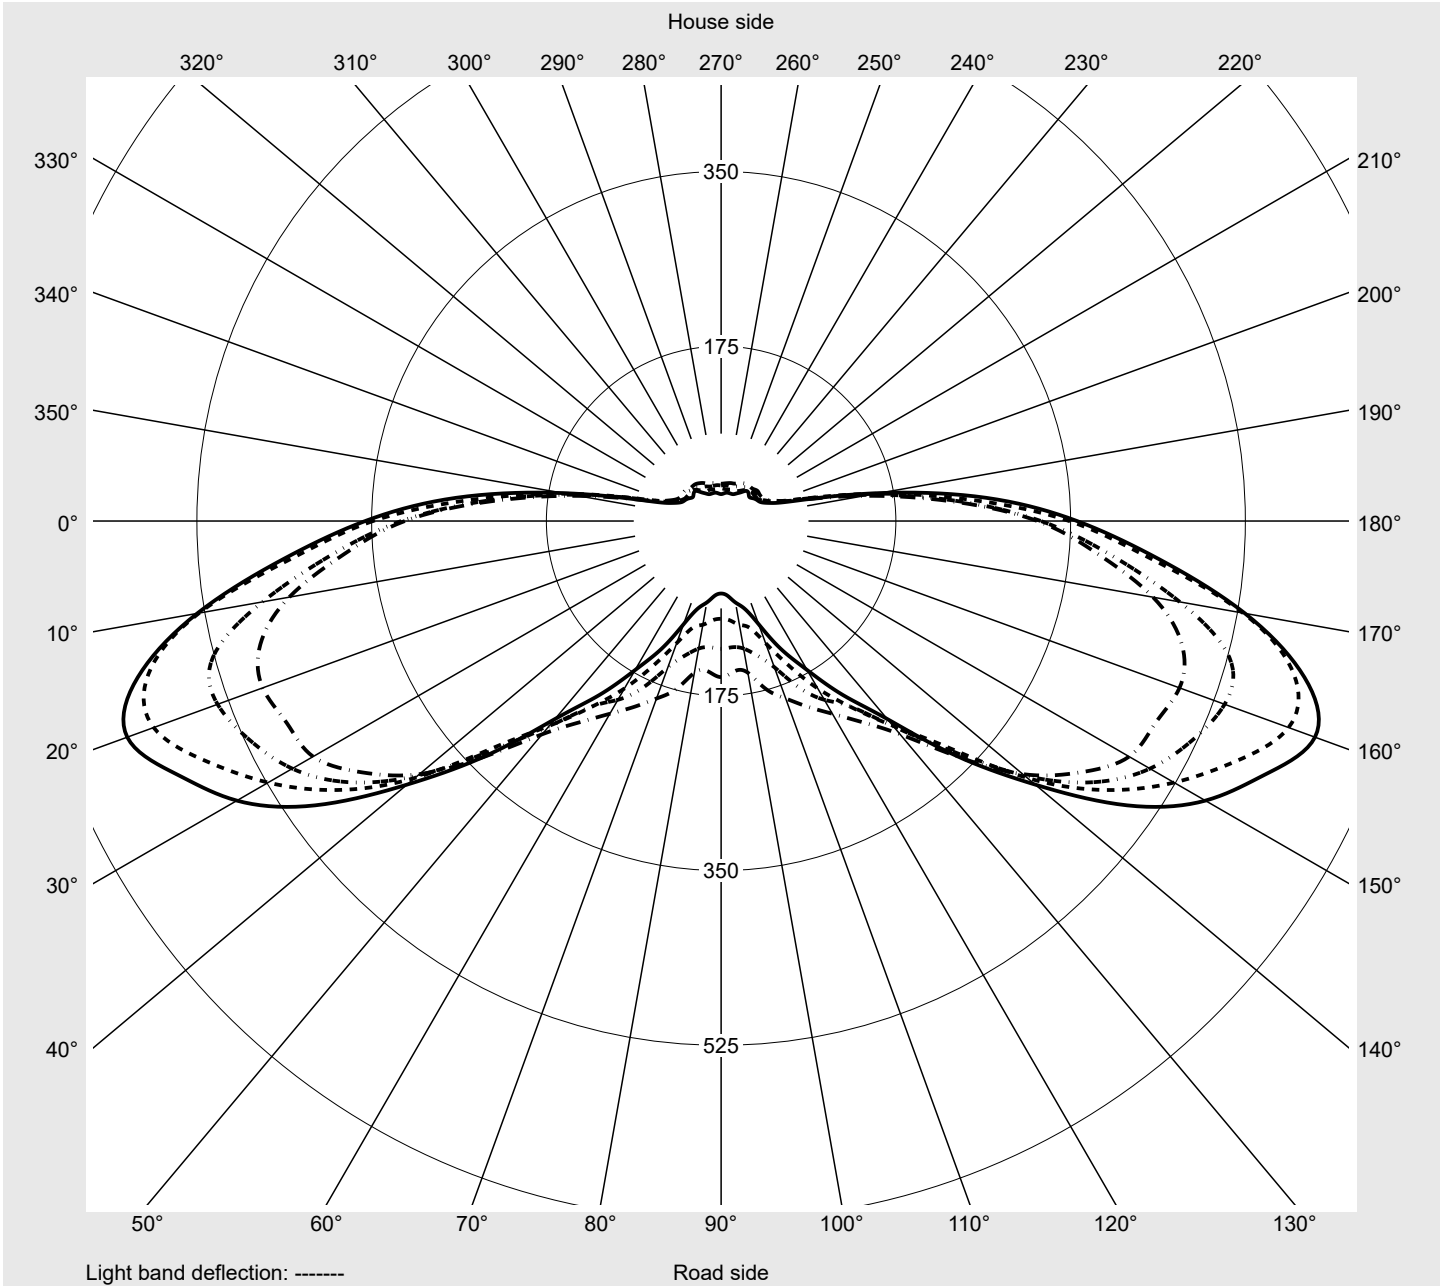

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
---	--	-------------------------------------

siteco

Table of values for luminous intensities		Maximum luminous intensity											
C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	189.1	190.8	192.7	194.2	195.7	197.2	198.8	199.9	200.6	201.1	201.8	202.5	202.8
5,0°	188.9	193.0	197.2	201.2	204.8	208.6	212.0	214.5	216.9	219.2	220.0	220.3	221.0
7,5°	188.4	193.0	199.3	205.4	211.4	217.1	223.0	227.3	229.9	231.8	232.7	234.3	237.2
10,0°	193.1	198.8	206.8	213.9	219.9	226.4	232.6	239.3	244.2	249.3	254.5	257.4	260.7
12,5°	206.1	214.5	220.8	229.0	234.2	239.5	247.4	255.4	263.7	269.7	275.8	281.1	282.8
15,0°	212.4	223.0	233.6	241.8	249.4	259.1	265.4	271.2	278.7	287.0	296.3	302.5	306.5
17,5°	220.0	234.8	248.9	260.3	270.3	281.0	287.0	292.5	297.2	298.8	300.7	308.4	316.0
20,0°	232.8	246.6	256.8	271.0	288.2	298.1	309.0	320.0	321.0	323.0	320.5	321.7	328.5
22,5°	241.1	260.5	276.3	292.4	309.7	322.2	331.0	340.9	346.7	342.2	337.7	339.5	342.2
25,0°	248.7	270.3	293.7	315.2	333.7	346.8	356.0	365.1	365.2	355.8	353.6	354.5	353.5
27,5°	257.6	281.7	302.6	322.4	342.0	360.6	372.8	377.7	374.3	365.9	364.2	362.2	365.3
30,0°	262.6	288.5	312.2	342.2	359.5	371.7	384.8	388.7	385.2	379.7	380.1	374.5	372.6
32,5°	269.0	299.5	326.2	351.9	369.5	389.5	398.3	399.7	400.6	394.7	389.4	382.1	383.0
35,0°	281.2	304.9	333.4	360.8	376.1	393.0	396.5	399.9	400.2	397.3	392.2	383.8	382.1
37,5°	282.9	313.2	341.0	363.0	380.7	395.8	404.2	405.6	399.2	394.3	385.1	377.4	370.1
40,0°	293.3	324.4	349.0	369.5	386.2	399.9	411.5	406.9	400.5	388.2	373.4	363.7	354.4
42,5°	298.0	325.8	359.6	379.7	397.3	414.7	420.3	411.0	393.5	382.0	371.4	360.9	349.4
45,0°	307.6	333.9	374.0	394.1	403.9	422.7	423.7	415.2	397.5	386.4	366.4	340.7	330.5
47,5°	307.9	346.6	385.6	408.8	425.3	443.0	438.7	417.3	399.5	392.0	354.4	317.1	306.5
50,0°	320.8	363.3	394.0	416.7	432.3	445.9	447.4	426.9	402.0	371.5	339.7	306.2	280.5
52,5°	328.8	373.5	413.5	436.4	440.5	455.0	453.5	419.4	386.4	352.0	313.5	273.9	247.9
55,0°	316.8	378.8	439.2	477.8	488.5	479.6	471.8	438.8	394.3	332.9	278.8	245.8	222.9
57,5°	320.3	392.1	466.4	526.9	536.6	520.2	495.9	455.9	396.4	325.1	268.5	227.1	206.7
60,0°	348.7	432.1	530.9	593.9	604.8	569.0	523.8	469.6	400.2	320.2	267.7	227.7	193.6
62,5°	356.4	440.6	532.7	604.8	632.9	600.9	560.0	496.4	410.7	332.0	258.8	212.8	172.3
65,0°	366.3	443.3	517.3	584.8	626.7	612.3	587.0	509.4	423.9	335.1	243.0	190.5	156.0
67,5°	383.7	483.7	552.0	599.5	611.8	602.4	564.6	502.1	415.0	323.2	230.4	170.4	139.3
70,0°	384.5	510.1	619.9	629.2	605.9	569.0	499.5	446.2	376.6	305.7	212.8	153.8	121.9
72,5°	390.2	514.5	629.8	623.0	586.5	511.7	425.7	373.8	335.1	287.0	199.2	105.2	63.2
75,0°	348.2	447.8	521.6	521.4	487.1	406.3	322.5	296.1	262.0	185.8	87.8	31.9	11.7
77,5°	212.1	289.8	322.0	319.4	290.5	260.8	217.4	169.2	100.5	41.0	13.2	4.9	3.3
80,0°	89.2	118.6	134.9	139.7	125.2	107.6	78.1	36.2	11.2	4.3	3.3	3.1	2.4
82,5°	17.9	22.7	26.1	30.7	31.1	21.8	8.8	2.6	2.1	1.9	1.8	1.7	1.6
85,0°	1.5	1.6	1.6	1.6	1.7	1.6	1.4	1.3	1.3	1.2	1.1	1.0	0.9
87,5°	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	202.5	202.1	202.5	202.6	202.6	202.6	187.3	185.4	183.6	181.9	180.1	178.0	176.6
5,0°	221.0	220.8	221.0	221.5	222.4	221.8	185.5	181.6	178.1	174.4	170.7	167.4	164.1
7,5°	239.3	240.4	242.0	243.9	245.6	246.6	183.0	177.6	172.3	167.7	163.4	159.3	155.2
10,0°	263.9	267.0	270.9	273.3	276.4	277.2	187.4	182.0	175.8	169.7	162.8	156.0	149.3
12,5°	285.7	289.2	292.2	297.0	301.3	303.4	196.2	185.7	175.5	165.7	157.0	150.2	143.8
15,0°	308.6	308.6	312.1	312.9	310.6	311.0	200.7	187.3	174.0	162.8	152.5	142.7	134.3
17,5°	320.2	320.9	325.5	328.5	328.1	327.1	205.6	190.7	176.9	163.4	149.0	136.4	126.7
20,0°	334.6	339.0	341.4	342.8	340.5	342.5	214.0	195.6	177.6	160.7	144.5	131.9	121.0
22,5°	347.0	353.5	357.9	360.0	357.2	355.5	216.2	194.8	173.9	155.7	140.2	126.0	113.6
25,0°	358.3	363.1	366.4	368.2	369.2	370.3	221.5	196.9	176.1	153.0	133.7	118.2	106.4
27,5°	370.6	372.0	376.1	380.8	383.1	384.5	228.0	200.2	172.0	146.2	127.7	111.4	96.3
30,0°	375.2	377.8	383.2	389.6	395.7	396.9	232.8	201.5	167.3	140.7	121.0	103.2	87.4
32,5°	381.9	378.9	387.4	397.0	396.9	388.8	235.0	197.9	164.2	137.0	115.2	97.2	83.2
35,0°	381.1	379.9	381.2	392.0	387.5	381.5	240.3	196.6	159.5	129.9	108.0	91.5	79.9
37,5°	369.1	368.3	371.8	377.7	373.1	368.0	240.4	196.5	155.8	123.8	100.7	86.0	76.3
40,0°	354.0	354.2	350.6	349.4	349.3	348.6	242.4	200.0	157.4	123.0	98.6	81.5	71.0
42,5°	345.7	338.7	323.3	319.1	313.5	313.2	248.0	198.0	145.5	111.5	90.0	73.1	65.3
45,0°	323.5	313.1	303.9	294.4	284.5	279.7	254.9	191.5	132.5	96.3	82.5	68.2	61.4
47,5°	299.7	280.2	265.2	258.0	250.1	248.9	246.4	178.1	117.4	85.1	74.5	64.4	57.1
50,0°	262.5	247.2	236.7	223.4	214.2	214.0	248.1	166.3	99.4	76.5	65.2	58.1	53.2
52,5°	232.0	219.3	205.9	189.3	179.9	178.8	239.2	152.3	88.0	67.8	56.8	51.5	50.0
55,0°	205.2	189.2	174.4	154.3	151.1	156.3	229.5	145.0	81.4	59.3	50.8	47.4	46.8
57,5°	183.6	155.7	139.4	129.7	126.9	127.9	234.6	151.5	86.0	56.0	47.7	43.3	42.7
60,0°	159.2	130.1	110.8	105.5	99.8	97.9	248.1	157.2	87.1	57.8	48.8	43.4	42.2
62,5°	141.2	110.0	90.9	82.9	75.2	72.6	266.5	161.1	79.6	52.8	44.4	41.8	39.5
65,0°	124.5	94.9	71.3	63.6	59.2	57.7	266.3	153.7	69.4	46.8	42.7	40.1	36.6
67,5°	109.6	77.4	57.6	49.5	46.6	45.1	261.3	139.7	59.8	43.9	40.1	38.8	36.2
70,0°	86.5	52.3	33.9	25.7	23.5	23.4	247.9	129.2	56.0	40.5	37.4	35.9	35.7
72,5°	34.2	16.1	9.8	7.3	6.8	6.6	246.9	131.3	48.5	38.4	35.3	32.2	33.0
75,0°	4.4	3.5	3.5	3.4	3.3	3.2	219.3	115.7	37.6	34.7	33.1	30.0	29.0
77,5°	2.9	2.7	2.7	2.6	2.5	2.4	142.4	71.2	23.6	24.1	24.8	21.6	18.3
80,0°	2.2	2.1	1.9	1.8	1.7	1.7	58.6	31.9	12.4	12.7	12.4	9.6	6.4
82,5°	1.5	1.4	1.3	1.2	1.1	1.1	12.1	7.1	4.0	4.1	3.7	3.1	2.9
85,0°	0.8	0.8	0.7	0.7	0.6	0.6	1.4	1.3	1.2	1.1	1.1	1.0	1.0
87,5°	0.4	0.3	0.3	0.3	0.2	0.2	0.8	0.7	0.7	0.6	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	0.3	0.3
2,5°	174.6	173.3	171.4	170.1	169.3	168.4	167.7	166.7	166.2	166.1	165.7	2.2	2.5
5,0°	160.8	158.2	156.6	154.8	153.3	152.2	151.2	150.6	150.2	149.6	149.4	4.5	7.0
7,5°	151.8	148.3	145.2	142.0	138.4	135.9	134.3	133.2	132.9	133.1	132.8	6.8	13.8
10,0°	143.7	139.6	136.5	133.7	130.7	128.0	125.1	122.0	118.0	116.0	115.0	9.3	23.1
12,5°	137.2	131.3	127.0	123.9	120.4	117.3	114.4	111.1	109.5	108.7	108.6	12.0	35.0
15,0°	127.3	121.0	115.1	110.1	105.7	102.3	100.1	98.6	98.0	98.1	98.4	14.6	49.6
17,5°	118.0	109.9	104.1	99.2	95.2	90.5	86.8	85.5	84.8	83.6	82.4	17.3	66.9
20,0°	110.9	103.7	96.9	92.5	89.0	85.4	81.1	76.8	73.5	71.6	70.7	20.2	87.2
22,5°	103.0	94.1	88.7	85.5	83.1	79.1	76.5	74.5	71.9	69.3	67.9	23.4	110.5
25,0°	96.0	86.9	80.9	78.4	74.7	70.5	68.9	67.6	65.5	64.8	65.0	26.4	137.0
27,5°	87.5	82.5	77.8	73.4	69.0	66.1	64.3	63.6	63.5	62.2	61.4	29.3	166.3
30,0°	78.4	75.5	71.2	66.7	65.6	65.1	63.9	62.5	59.9	58.6	58.6	32.3	198.6
32,5°	75.4	70.7	66.4	64.0	63.9	62.1	59.3	58.3	58.2	59.6	61.4	35.1	233.7
35,0°	72.4	67.2	62.5	61.0	61.9	58.3	54.6	53.3	56.7	59.4	59.4	37.4	271.1
37,5°	69.3	65.1	62.1	59.7	58.1	57.1	56.3	53.9	53.2	54.1	54.3	39.2	310.3
40,0°	66.3	62.2	60.1	57.4	54.3	52.9	53.5	53.8	53.6	51.5	49.8	40.7	351.0
42,5°	62.8	60.2	55.7	54.3	52.9	52.6	52.5	52.3	51.9	50.5	50.0	42.0	393.0
45,0°	60.6	58.5	53.8	53.1	53.7	51.0	52.6	54.2	50.4	49.4	50.1	43.1	436.1
47,5°	54.0	53.6	52.7	51.3	48.2	47.0	48.3	49.3	47.4	46.7	49.3	43.6	479.7
50,0°	52.0	50.4	49.2	50.8	48.9	46.0	45.8	46.3	45.8	46.3	48.3	43.8	523.5
52,5°	51.1	48.7	45.8	47.3	47.6	45.0	42.5	42.6	43.4	43.4	42.8	43.5	566.9
55,0°	47.2	45.4	45.0	45.0	43.7	42.0	39.9	39.3	38.5	37.8	37.4	43.8	610.7
57,5°	44.8	43.4	43.0	41.4	39.0	38.2	36.8	36.0	36.1	36.1	35.7	45.0	655.8
60,0°	42.0	42.4	40.9	37.6	34.7	33.2	33.3	32.6	32.4	32.3	32.8	47.5	703.2
62,5°	37.1	38.9	39.3	35.3	32.1	29.7	29.1	29.1	28.8	27.7	27.0	48.5	751.7
65,0°	35.0	35.2	34.6	30.8	27.9	26.1	24.6	24.8	26.0	25.8	24.4	48.3	800.0
67,5°	34.2	31.7	28.6	25.9	24.9	23.5	21.3	20.8	22.4	22.6	21.4	48.0	848.0
70,0°	34.1	29.7	25.8	22.2	21.0	19.9	17.3	15.5	14.7	13.8	13.3	46.3	894.3
72,5°	30.6	27.0	23.4	16.9	12.4	11.0	9.2	7.4	6.3	5.8	5.6	42.4	936.8
75,0°	25.7	20.1	13.4	8.6	6.4	5.5	5.0	4.5	4.1	3.8	3.7	33.5	970.2
77,5°	14.2	9.2	6.7	5.4	4.9	4.5	4.1	3.8	3.3	3.0	2.9	19.7	989.9
80,0°	5.1	5.0	4.8	4.3	4.0	3.6	3.2	2.8	2.5	2.2	2.0	7.8	997.7
82,5°	3.0	3.1	3.2	3.2	3.0	2.8	2.4	2.0	1.7	1.5	1.4	1.8	999.5
85,0°	1.0	1.0	1.2	1.5	1.6	1.6	1.5	1.2	0.9	0.7	0.6	0.3	999.9
87,5°	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.1	0.1	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51G08GE EAN: 4058352991350	LP number 59351_24
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3480	22.7	23.4	23.0
95	241	252	3302	21.6	22.2	21.9
90	229	250	3137	20.5	21.0	20.8
85	216	248	2959	19.3	19.9	19.6
80	203	246	2781	18.2	18.7	18.4
75	190	243	2603	17.0	17.5	17.2
70	178	241	2439	15.9	16.4	16.2
65	165	238	2261	14.9	15.2	15.0
60	152	235	2083	13.7	14.0	13.8
55	140	232	1918	12.7	13.0	12.8
50	127	229	1740	11.6	11.8	11.7
45	114	225	1562	10.5	10.8	10.6
40	102	221	1397	9.5	9.8	9.6
35	89	216	1219	8.4	8.6	8.5
30	76	210	1041	7.4	7.5	7.4
25	63	203	863	6.3	6.5	6.4
20	51	195	699	5.4	5.5	5.4
18	45	191	617	4.9	5.0	5.0