




Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
	Version post-top or side-entry mounting Optic pedestrian crossing, asymmetric left distribution (PC-L) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 19370 lm Power consumption = 146.7 W Luminous efficacy = 132 lm/W	serial documentation 07.02.2024





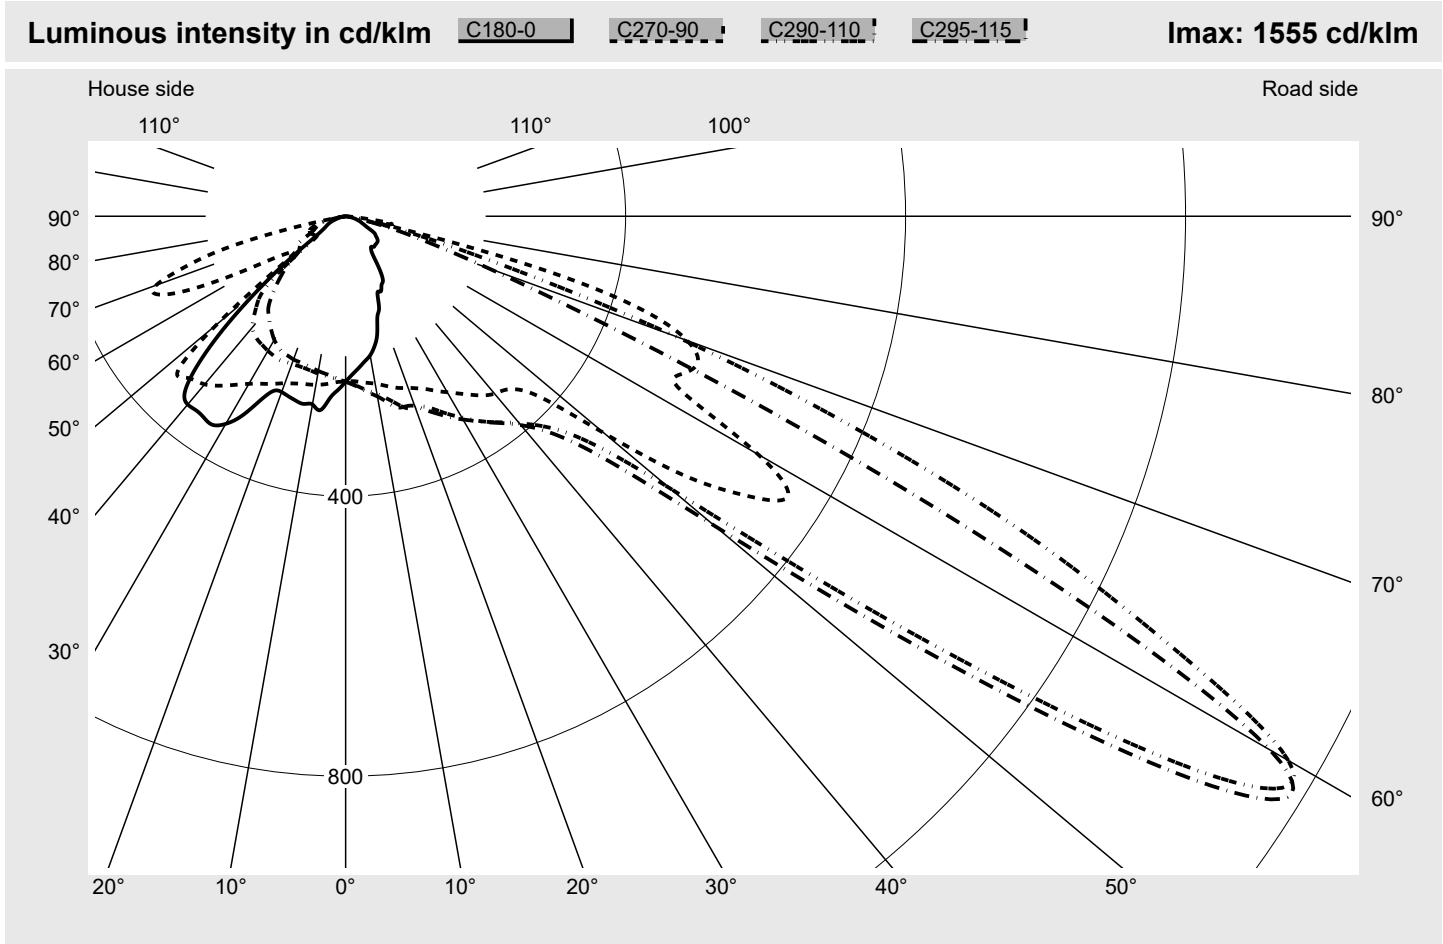


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	818.0
Imax 80°	67.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
--	--	------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

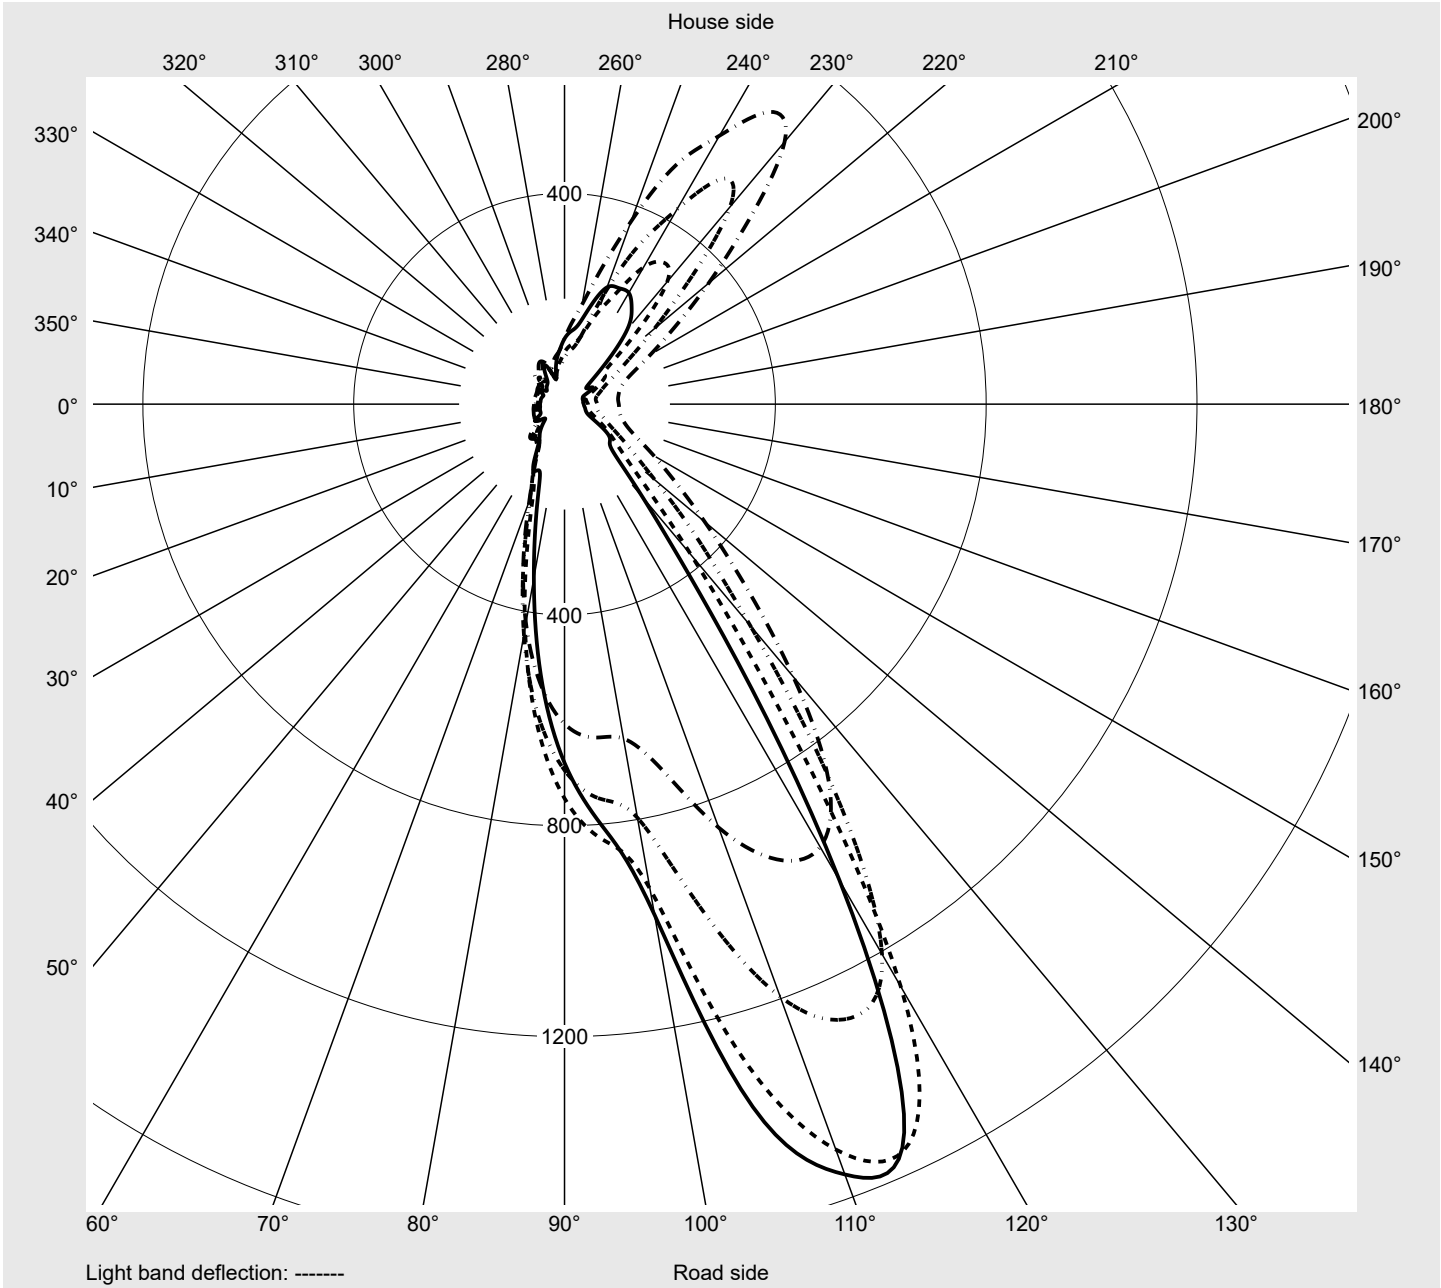

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	225.9	227.1	227.1	227.5	227.7	227.7	228.1	228.3	228.7	229.7	230.5	231.3	232.3	233.1
5,0°	217.3	216.7	216.9	217.3	217.9	218.5	219.3	220.3	221.3	222.7	224.3	225.9	227.7	229.5
7,5°	209.1	208.9	209.3	209.9	210.9	212.1	213.3	214.5	215.7	217.5	219.5	221.9	224.5	227.5
10,0°	201.7	201.1	201.5	202.5	203.3	203.9	205.5	207.7	210.5	213.1	215.5	217.9	220.9	224.7
12,5°	190.3	190.9	191.9	193.1	195.3	196.9	199.1	202.3	204.7	207.1	211.1	215.1	219.1	223.5
15,0°	174.1	173.3	175.1	177.9	181.7	185.1	188.7	192.5	196.7	201.9	206.9	211.9	218.1	223.3
17,5°	150.7	152.7	154.1	156.7	160.7	166.1	172.5	179.9	186.9	194.1	201.7	209.7	216.9	224.5
20,0°	139.5	139.1	140.7	143.1	146.3	150.3	155.5	163.3	173.7	184.5	194.5	204.7	215.3	224.3
22,5°	118.7	120.3	121.9	125.7	131.5	137.7	143.7	150.9	159.5	171.7	185.7	197.9	211.1	222.7
25,0°	118.5	118.7	118.5	117.9	117.7	120.5	129.5	139.3	148.7	158.7	173.7	190.1	205.3	221.3
27,5°	111.0	112.6	113.9	116.1	118.5	118.3	117.7	123.7	137.5	148.7	161.9	180.3	199.7	218.7
30,0°	106.6	107.0	108.0	108.4	111.0	115.3	118.9	117.3	122.7	138.1	152.7	169.5	191.7	213.5
32,5°	90.8	96.4	101.2	104.8	106.8	108.4	113.6	118.3	117.7	125.5	142.5	159.1	181.9	207.5
35,0°	68.6	71.0	78.4	89.4	101.6	105.8	106.6	112.6	118.9	118.5	130.7	147.5	169.5	198.5
37,5°	59.8	62.4	67.0	74.0	85.8	101.6	106.0	106.6	114.1	118.9	121.5	136.7	158.9	189.5
40,0°	57.0	59.4	63.6	68.8	75.2	86.4	104.8	106.6	108.4	116.7	117.7	128.3	147.1	178.1
42,5°	59.4	61.6	65.0	69.0	73.4	79.0	93.2	109.6	107.4	110.4	116.1	121.7	135.5	165.3
45,0°	59.0	61.0	64.0	68.0	72.8	77.4	83.2	103.0	109.2	106.2	112.0	115.3	121.9	149.3
47,5°	58.8	60.2	62.4	65.0	68.6	73.0	77.4	86.2	107.6	103.6	105.4	109.0	112.0	136.9
50,0°	58.6	59.8	61.2	62.6	64.6	67.2	69.8	73.2	97.2	99.0	96.6	100.4	106.0	130.1
52,5°	57.8	58.8	59.8	60.6	61.8	62.8	64.4	65.4	80.8	91.6	87.0	91.6	102.0	136.1
55,0°	54.8	55.4	56.8	58.2	59.4	59.6	61.8	59.2	66.6	84.0	79.2	84.8	98.6	139.9
57,5°	50.8	51.4	52.6	53.8	55.8	58.4	63.0	53.2	57.2	74.2	76.6	82.6	101.2	140.7
60,0°	46.6	46.4	47.2	47.8	48.2	54.0	64.4	47.6	50.2	61.8	73.0	83.6	108.4	138.7
62,5°	36.0	37.8	38.6	39.6	40.4	48.6	58.0	43.0	45.2	52.8	64.4	84.4	111.8	125.5
65,0°	29.8	30.6	32.0	33.8	35.6	43.6	49.2	39.0	41.2	46.2	56.0	83.4	105.2	109.4
67,5°	25.0	26.6	27.8	29.4	33.0	40.0	40.4	34.6	36.8	39.4	48.8	75.8	87.4	83.2
70,0°	21.8	22.4	23.4	25.2	29.2	35.4	32.8	30.4	30.8	32.2	41.0	61.8	68.0	57.2
72,5°	17.6	18.6	19.2	21.0	25.2	29.8	26.6	24.6	24.8	26.4	33.4	48.6	55.2	41.6
75,0°	14.4	14.6	15.0	16.6	20.4	24.0	20.8	18.8	19.4	20.4	24.8	37.0	42.6	30.8
77,5°	9.8	10.8	11.0	12.6	16.2	17.8	14.6	13.8	13.8	14.4	16.4	23.4	24.8	23.4
80,0°	7.0	7.2	7.2	8.2	11.2	11.0	9.2	8.8	7.8	8.2	9.2	10.2	12.2	15.2
82,5°	4.0	4.4	4.4	4.4	5.2	6.4	4.8	4.2	4.2	4.4	4.8	5.4	6.2	7.8
85,0°	1.2	1.2	1.4	1.6	2.0	1.6	1.6	1.8	1.8	2.0	2.2	2.2	2.6	3.0
87,5°	0.4	0.4	0.4	0.4	0.4	0.6	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	233.7	234.5	234.9	235.3	235.9	237.3	238.3	239.1	240.3	240.9	241.5	242.1	242.7	243.3
5,0°	231.5	233.5	234.9	236.1	237.7	240.1	242.1	244.3	245.7	246.9	248.1	249.1	250.5	251.7
7,5°	230.3	232.9	235.3	237.5	240.1	243.5	246.7	249.3	251.9	254.1	256.5	258.7	260.7	263.5
10,0°	228.7	232.7	236.1	239.3	242.9	247.3	250.9	254.3	257.9	261.5	265.7	269.7	273.9	277.3
12,5°	228.3	233.5	238.3	242.5	247.3	252.3	256.7	260.9	266.1	271.7	277.3	280.1	276.7	272.7
15,0°	229.1	235.3	241.5	246.9	252.5	257.9	263.3	269.3	276.5	282.7	281.9	276.3	275.5	276.5
17,5°	231.1	237.7	244.5	251.3	257.3	263.3	270.3	279.1	287.3	284.9	281.9	283.5	283.3	281.9
20,0°	232.1	239.3	246.9	254.7	260.9	268.1	277.7	288.5	291.1	288.5	292.1	292.3	289.9	286.3
22,5°	233.1	241.3	249.7	258.3	266.1	274.9	287.9	296.1	294.5	299.7	302.1	300.1	295.1	289.1
25,0°	233.9	244.1	253.3	263.1	272.5	284.5	298.9	301.1	305.3	311.5	312.1	307.7	299.3	290.9
27,5°	234.3	246.7	257.5	268.9	281.5	296.1	308.1	310.3	318.9	323.7	322.7	315.3	304.5	294.7
30,0°	233.1	248.5	261.5	275.1	290.3	307.5	315.1	322.7	331.9	335.3	332.3	322.5	311.3	302.5
32,5°	231.9	250.3	266.7	282.5	300.3	318.1	323.3	335.9	345.8	347.0	341.4	331.7	323.9	317.9
35,0°	227.7	251.1	271.1	290.7	311.3	326.9	334.1	349.0	358.8	359.6	352.8	343.4	340.6	350.0
37,5°	223.5	251.5	275.7	299.7	322.7	336.1	347.4	363.2	371.2	372.8	366.4	360.2	370.8	398.2
40,0°	216.3	248.9	277.7	305.9	330.9	345.8	362.0	378.4	386.2	389.6	386.8	393.0	424.0	456.6
42,5°	204.3	242.3	277.9	310.5	336.7	354.8	375.4	395.2	405.0	413.6	421.8	448.0	492.6	519.0
45,0°	189.1	236.3	282.5	322.3	350.4	370.0	389.6	412.8	432.8	453.8	482.8	532.2	573.9	579.9
47,5°	180.5	241.9	305.7	356.0	388.8	406.0	420.2	444.6	484.6	531.2	583.9	637.5	650.1	612.3
50,0°	183.7	269.9	361.2	435.4	482.4	498.2	500.8	529.8	604.1	688.3	748.7	767.3	703.7	586.5
52,5°	195.3	300.3	421.6	531.2	606.5	634.9	644.3	719.3	854.8	953.0	970.4	874.0	675.5	482.4
55,0°	190.5	296.9	443.6	588.5	694.5	750.9	796.8	984.4	1196.3	1285.0	1204.9	889.0	547.8	349.2
57,5°	171.3	269.9	431.4	606.9	747.9	829.2	933.4	1269.4	1504.9	1547.3	1276.0	724.9	374.6	211.7
60,0°	136.9	202.3	335.1	516.0	680.5	801.2	984.0	1380.4	1555.3	1524.9	1043.9	484.8	230.9	134.5
62,5°	101.2	138.5	239.9	403.6	541.4	663.1	899.8	1252.8	1328.0	1153.3	657.9	260.7	115.1	99.2
65,0°	84.0	106.6	192.3	383.6	531.8	647.7	904.0	1121.9	1069.7	717.7	354.2	157.7	83.4	59.8
67,5°	64.0	71.2	124.7	339.4	544.6	692.3	944.4	1006.8	779.7	391.6	187.7	113.8	64.6	44.8
70,0°	46.0	49.6	70.2	258.5	519.2	668.3	818.0	771.1	501.4	216.5	123.7	83.6	48.0	38.2
72,5°	34.6	36.0	43.6	182.5	444.0	509.2	511.8	440.0	250.7	122.7	80.8	49.4	37.4	38.0
75,0°	25.6	22.4	27.2	108.2	278.7	295.9	230.9	196.7	117.7	68.8	45.8	24.8	29.0	29.8
77,5°	19.0	19.0	19.6	38.0	65.6	75.6	68.2	55.4	40.2	27.4	19.2	16.4	19.8	21.8
80,0°	12.4	17.6	16.6	33.0	65.6	67.6	44.8	24.2	19.4	15.2	11.8	10.6	10.6	14.4
82,5°	7.0	9.4	11.0	20.0	40.6	44.8	29.0	14.6	10.4	8.6	7.2	6.4	5.8	6.2
85,0°	3.6	4.2	4.6	5.6	6.8	8.2	8.6	7.0	4.8	4.0	3.4	3.0	2.8	2.4
87,5°	1.2	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.4	1.4	1.2	1.2	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	243.9	244.5	245.1	245.7	246.3	246.7	247.7	248.1	248.3	248.9	248.9	248.5	248.1	247.5
5,0°	252.9	254.1	255.5	256.5	257.7	258.7	259.9	260.9	261.3	262.1	261.9	261.1	260.3	259.3
7,5°	266.1	268.5	270.9	272.9	274.7	275.9	277.5	278.9	279.5	280.1	280.3	279.1	278.3	276.5
10,0°	278.1	276.5	273.9	271.9	270.9	270.7	271.1	272.3	273.1	273.7	274.3	274.3	275.1	276.3
12,5°	271.9	272.3	272.5	272.5	272.7	272.5	272.9	274.1	274.7	275.3	275.9	276.1	277.1	278.1
15,0°	276.3	275.5	274.7	273.5	272.9	271.9	271.7	272.5	273.1	273.3	274.1	274.9	276.5	277.9
17,5°	279.5	277.1	274.9	272.7	271.3	269.7	269.1	269.7	270.1	270.3	271.3	272.7	274.9	277.3
20,0°	281.9	277.9	274.5	271.7	269.3	267.5	266.5	266.9	267.3	267.3	268.1	269.7	271.7	274.5
22,5°	283.1	277.9	273.7	270.5	269.1	268.3	268.5	269.9	270.3	270.1	270.3	270.1	270.7	271.9
25,0°	283.9	278.9	275.7	275.5	277.7	281.9	286.1	289.9	291.5	290.3	287.7	283.3	278.9	276.1
27,5°	287.9	285.7	288.3	296.3	305.9	313.5	318.3	321.1	321.7	320.1	317.7	312.1	303.9	293.7
30,0°	299.3	305.5	318.7	330.3	337.7	341.8	342.6	342.4	342.4	341.2	340.8	339.1	334.3	324.9
32,5°	326.1	343.0	357.2	364.8	365.8	362.4	358.2	354.6	353.4	354.0	356.8	360.6	362.4	358.6
35,0°	370.6	388.0	396.6	392.8	379.6	366.6	357.6	353.0	352.0	353.8	359.4	368.2	378.8	388.6
37,5°	420.8	431.4	422.4	401.0	378.8	364.0	355.2	351.2	350.0	352.6	358.8	368.8	383.0	402.2
40,0°	472.2	462.8	437.0	410.0	386.2	368.4	358.0	352.6	351.0	354.0	362.6	374.4	391.0	413.6
42,5°	515.2	489.2	458.4	425.0	395.2	370.6	353.4	343.2	339.8	344.0	356.4	374.2	398.8	428.0
45,0°	548.6	509.2	460.0	408.2	364.4	332.3	312.1	300.3	296.5	300.5	314.3	334.9	365.4	408.4
47,5°	550.4	474.8	401.0	339.3	295.5	264.9	245.7	235.5	231.9	234.3	244.9	265.1	295.7	341.0
50,0°	483.4	376.4	301.7	246.7	207.3	183.1	169.5	163.3	161.1	161.5	166.9	178.9	201.5	240.3
52,5°	347.2	255.9	195.7	152.5	127.3	114.1	107.0	104.2	103.0	102.0	104.2	109.0	120.1	144.1
55,0°	224.3	158.5	119.5	94.8	80.4	70.0	63.6	62.4	62.2	60.4	60.2	64.6	73.6	86.2
57,5°	143.9	111.4	88.0	68.8	56.0	48.8	45.8	45.2	44.6	42.8	41.8	42.0	47.8	61.0
60,0°	112.2	101.8	72.6	51.8	44.2	41.2	39.4	37.4	36.4	35.4	35.8	35.6	36.8	44.0
62,5°	92.2	85.6	59.2	37.0	35.8	35.6	35.0	33.0	31.8	31.0	31.4	29.8	29.8	30.4
65,0°	65.4	62.8	47.2	33.0	32.8	33.0	31.6	29.8	28.4	28.0	28.4	28.4	26.8	27.0
67,5°	40.6	46.4	40.6	31.4	31.0	29.8	28.0	26.2	24.6	24.6	25.0	26.0	25.6	25.0
70,0°	35.8	36.6	32.8	26.8	26.0	24.8	23.6	21.8	20.4	20.6	21.0	21.2	21.4	21.6
72,5°	28.2	26.8	25.2	21.4	20.2	18.6	17.6	16.8	15.6	15.4	15.4	15.8	16.4	17.4
75,0°	21.6	19.8	19.0	16.2	14.8	13.4	12.6	12.4	11.6	11.2	10.8	11.2	12.0	13.0
77,5°	16.8	13.8	13.8	12.0	10.4	9.8	9.4	9.6	8.8	8.4	8.2	8.0	8.2	8.6
80,0°	13.2	10.6	8.8	8.0	6.8	6.4	6.2	6.2	5.2	5.2	5.2	5.0	5.0	5.4
82,5°	7.4	6.2	5.2	4.4	4.4	3.6	3.4	3.2	2.6	2.6	2.6	2.8	3.0	3.2
85,0°	2.2	2.6	2.0	1.8	1.6	1.2	1.2	1.0	1.0	1.0	1.0	1.0	1.2	1.2
87,5°	1.0	0.8	0.8	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	246.9	246.3	245.5	244.5	243.5	242.7	241.5	240.5	239.9	239.1	238.3	237.7	236.9	236.1
5,0°	258.3	257.3	255.9	254.3	252.5	250.7	249.1	247.3	246.3	244.3	242.5	240.9	239.5	237.9
7,5°	274.7	272.1	270.3	267.3	263.9	261.3	258.5	255.3	252.9	250.3	247.3	244.5	242.3	240.1
10,0°	278.7	282.1	284.5	282.9	278.3	273.5	268.5	263.5	259.7	255.5	251.5	247.9	244.5	241.3
12,5°	278.7	278.9	278.1	278.1	281.5	284.3	279.5	272.5	266.3	260.9	255.5	250.7	246.1	242.3
15,0°	279.7	280.9	281.7	280.9	279.1	277.1	281.7	281.9	273.5	266.3	259.5	253.1	247.7	243.1
17,5°	279.7	282.1	283.7	284.5	284.7	283.1	279.1	280.9	283.3	273.5	265.1	257.1	250.5	245.3
20,0°	277.9	281.3	284.7	287.3	289.3	289.9	287.7	282.5	283.9	283.5	271.5	261.7	253.9	247.7
22,5°	275.3	279.1	283.3	288.3	293.1	296.5	297.5	293.7	287.1	290.7	281.1	268.9	258.9	251.3
25,0°	275.3	277.7	282.1	288.3	295.5	302.5	306.3	306.1	298.3	293.1	293.7	277.1	264.3	255.3
27,5°	285.1	281.7	284.3	290.5	298.5	307.7	314.9	317.3	310.7	301.3	299.5	285.1	269.7	258.5
30,0°	311.5	297.9	291.7	295.3	303.5	313.1	322.5	326.3	322.3	311.5	302.3	295.1	276.5	262.5
32,5°	347.8	331.1	313.7	305.9	309.7	319.7	330.1	335.5	333.5	322.7	309.3	304.7	285.1	267.5
35,0°	387.4	374.4	353.8	331.7	322.9	329.1	340.6	346.6	345.0	333.9	319.7	311.5	295.1	273.9
37,5°	418.8	420.4	402.4	373.6	347.6	343.8	353.4	359.4	356.2	345.4	331.3	318.5	305.1	280.5
40,0°	438.6	459.0	457.4	431.4	392.0	368.4	371.2	374.4	370.4	361.6	347.2	329.9	313.5	286.7
42,5°	459.6	489.8	509.8	499.4	460.0	414.4	397.8	395.0	390.8	381.0	361.0	338.9	318.3	291.3
45,0°	458.2	506.2	549.2	569.1	547.2	492.8	447.8	430.4	418.6	399.4	372.6	348.8	325.9	297.7
47,5°	401.8	474.6	549.0	609.9	627.9	590.7	528.8	488.6	449.8	416.0	382.0	353.2	323.7	292.5
50,0°	299.7	379.6	481.2	596.9	683.7	681.1	615.3	556.6	467.4	388.2	325.9	279.3	239.3	207.5
52,5°	188.9	255.9	356.8	495.2	649.5	676.7	588.1	500.4	368.6	261.7	191.9	154.1	124.1	103.2
55,0°	110.8	150.3	222.3	339.4	488.6	522.0	426.6	330.9	225.9	146.7	112.2	100.4	87.8	75.2
57,5°	78.4	94.0	103.6	194.3	303.3	327.9	299.9	232.7	185.5	141.1	118.7	110.8	98.4	83.8
60,0°	62.4	52.2	61.6	112.2	185.5	222.1	243.9	243.1	235.9	193.7	153.5	138.5	124.1	103.6
62,5°	39.0	38.0	49.4	83.2	119.1	157.3	201.1	288.9	333.3	299.3	235.3	204.5	183.5	147.3
65,0°	28.4	31.4	42.2	76.0	97.2	115.5	149.5	296.7	419.8	428.0	352.4	292.9	251.9	193.5
67,5°	26.0	26.8	35.6	65.2	78.6	89.6	98.8	229.7	426.4	504.4	448.0	359.6	291.5	207.9
70,0°	22.0	23.8	30.0	43.4	60.0	69.4	71.2	147.3	352.0	477.6	471.6	374.0	288.1	189.5
72,5°	17.8	18.6	22.8	27.2	38.2	51.4	53.0	89.8	228.3	349.0	379.8	309.1	240.5	147.9
75,0°	13.8	14.2	16.4	19.8	20.6	24.2	36.2	54.8	128.1	204.9	236.3	213.7	178.7	104.4
77,5°	10.4	10.6	12.2	13.4	14.4	15.8	19.8	30.4	58.4	94.0	107.2	97.2	84.0	49.0
80,0°	7.2	8.0	9.4	8.6	8.8	9.2	11.4	15.6	22.4	29.4	24.2	15.8	12.4	10.8
82,5°	4.4	4.8	5.0	4.4	4.4	4.8	5.8	7.2	9.0	10.2	8.6	5.2	3.4	4.2
85,0°	1.6	1.6	1.6	1.6	1.8	2.0	2.2	2.4	2.8	3.0	2.6	2.0	1.6	2.0
87,5°	0.4	0.4	0.4	0.6	0.6	0.8	0.8	1.0	1.0	1.0	1.2	1.2	1.2	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4	236.4
2,5°	235.1	234.5	233.3	232.7	231.9	231.3	230.7	229.7	229.1	228.5	228.1	227.9	227.7	227.3
5,0°	235.7	233.9	231.5	229.3	227.5	225.9	224.7	223.3	222.1	220.7	219.7	218.9	218.1	217.5
7,5°	236.7	233.1	229.5	226.7	224.3	221.9	219.5	217.5	216.1	214.7	213.3	212.1	211.1	210.3
10,0°	236.9	232.3	228.1	224.5	221.3	218.5	215.9	213.7	211.3	208.3	205.9	204.3	203.7	203.1
12,5°	236.9	231.3	226.3	221.9	218.5	215.1	211.1	207.3	205.3	202.9	199.5	197.5	195.5	193.3
15,0°	236.9	230.5	224.9	219.9	215.5	210.5	205.9	201.9	197.7	193.1	189.1	185.1	181.5	177.9
17,5°	238.5	230.9	224.3	218.5	212.5	206.3	199.3	193.1	186.1	179.5	172.5	165.5	159.9	156.1
20,0°	240.3	231.7	224.5	217.7	209.3	200.5	190.9	181.7	172.3	162.5	155.1	149.7	145.7	142.5
22,5°	243.3	233.7	225.1	215.7	205.1	192.7	180.7	167.7	156.3	148.7	142.3	136.1	130.3	124.7
25,0°	246.5	235.7	226.1	214.1	199.3	184.3	168.9	154.9	145.5	136.5	126.5	118.5	116.5	117.3
27,5°	248.1	235.9	224.1	209.3	192.1	174.3	156.3	144.7	132.7	119.5	114.7	116.3	116.5	114.7
30,0°	250.3	236.1	222.1	203.9	183.1	161.9	147.5	133.5	118.3	114.3	115.7	112.6	108.2	106.2
32,5°	253.1	237.5	219.5	196.3	172.5	151.1	136.5	120.3	114.5	115.7	109.6	104.4	103.2	102.8
35,0°	257.5	239.3	217.3	188.7	160.7	140.7	124.7	114.5	116.3	108.8	102.8	102.6	99.0	86.4
37,5°	262.3	240.7	213.5	180.1	150.3	129.7	115.7	114.9	110.6	102.6	103.0	97.6	80.4	69.4
40,0°	264.7	238.5	207.1	171.9	141.1	121.5	113.6	113.0	102.6	100.8	99.4	81.2	70.6	65.0
42,5°	263.9	231.5	193.9	157.5	129.5	117.1	112.8	105.0	95.8	100.0	84.4	71.8	67.4	64.8
45,0°	264.1	223.5	179.5	140.9	115.7	112.4	109.8	97.4	90.2	89.4	74.0	69.8	67.4	63.6
47,5°	253.9	209.7	162.3	124.1	104.6	106.0	102.0	91.8	87.4	74.4	69.4	66.6	63.4	61.0
50,0°	180.5	153.3	125.5	107.2	98.2	96.2	90.6	87.0	80.2	66.0	64.0	62.4	60.0	59.0
52,5°	93.2	82.8	73.4	86.0	93.0	86.0	78.2	80.2	65.4	60.0	59.2	57.6	57.0	57.2
55,0°	69.0	58.8	51.0	79.4	88.8	76.2	66.2	69.8	55.2	54.6	54.8	53.8	54.4	54.8
57,5°	73.2	59.2	50.6	82.6	83.8	66.2	57.0	57.8	49.6	47.4	53.8	51.2	49.6	50.6
60,0°	85.6	63.0	52.8	79.0	77.2	58.0	50.4	47.6	44.0	44.0	55.6	45.8	43.6	45.2
62,5°	107.6	72.0	54.8	64.6	63.0	50.4	44.2	41.0	39.2	41.2	51.8	38.4	36.2	36.8
65,0°	127.5	79.6	55.8	53.4	48.2	41.8	39.0	36.2	35.0	37.6	47.2	35.6	30.6	30.2
67,5°	127.9	76.6	55.6	48.0	38.6	32.8	33.4	31.6	31.2	32.0	39.4	33.6	27.2	26.2
70,0°	110.4	70.8	53.6	44.4	34.2	27.2	28.6	27.0	27.2	26.8	31.2	31.0	23.6	22.2
72,5°	82.6	58.0	47.8	40.6	31.2	23.6	24.0	22.0	22.8	22.0	23.6	26.0	20.0	18.0
75,0°	53.2	41.0	39.4	37.2	27.8	20.0	20.0	18.0	17.8	18.0	17.6	19.4	16.2	14.0
77,5°	26.2	24.2	27.0	23.8	19.4	14.8	14.6	13.4	13.0	13.4	12.6	13.6	11.8	10.2
80,0°	9.6	11.2	13.0	12.0	10.4	8.6	8.6	8.2	8.4	9.0	8.2	8.4	7.2	6.8
82,5°	5.0	5.8	6.2	5.8	5.2	4.6	4.4	4.4	4.6	5.0	4.8	4.0	3.2	3.4
85,0°	2.4	2.6	2.4	2.4	2.4	2.4	2.2	2.2	2.0	2.0	1.8	1.6	1.2	1.2
87,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.0	0.8	0.6	0.6	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
--	--	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	236.4	236.4	0.4	0.4
2,5°	227.5	227.7	2.8	3.2
5,0°	217.3	217.3	5.7	8.9
7,5°	209.9	209.5	8.7	17.6
10,0°	202.1	201.7	11.5	29.1
12,5°	191.9	191.1	14.3	43.4
15,0°	175.1	173.1	17.0	60.4
17,5°	153.7	152.7	19.4	79.8
20,0°	140.1	138.7	21.8	101.6
22,5°	121.5	120.3	24.2	125.8
25,0°	118.5	118.7	26.8	152.6
27,5°	113.2	112.2	29.8	182.4
30,0°	106.4	106.2	33.1	215.5
32,5°	100.2	95.8	36.5	252.0
35,0°	75.0	68.8	39.7	291.6
37,5°	64.0	60.8	43.0	334.6
40,0°	61.0	58.0	46.8	381.4
42,5°	62.4	60.2	50.9	432.3
45,0°	61.2	59.4	54.2	486.5
47,5°	59.8	58.8	56.3	542.9
50,0°	58.8	58.6	56.6	599.5
52,5°	57.6	57.6	54.6	654.1
55,0°	55.0	54.6	52.6	706.7
57,5°	50.6	50.4	51.6	758.2
60,0°	45.8	45.8	48.4	806.6
62,5°	37.4	37.2	42.1	848.7
65,0°	30.0	29.6	38.6	887.3
67,5°	25.8	25.6	35.2	922.5
70,0°	21.6	21.4	29.7	952.2
72,5°	17.4	17.8	21.5	973.7
75,0°	13.4	13.8	13.5	987.2
77,5°	9.8	10.0	6.5	993.7
80,0°	6.2	6.6	3.5	997.2
82,5°	3.6	4.0	1.9	999.1
85,0°	1.0	1.0	0.7	999.8
87,5°	0.4	0.4	0.2	1000.0
90,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19370	146.7	161.2	154.0
95	241	252	18379	136.0	149.4	142.7
90	229	250	17464	126.7	139.1	132.9
85	216	248	16472	117.2	128.5	122.8
80	203	246	15481	108.0	118.4	113.2
75	190	243	14489	99.4	108.8	104.1
70	178	241	13574	91.7	100.3	96.0
65	165	238	12583	83.6	91.4	87.5
60	152	235	11591	75.9	82.9	79.4
55	140	232	10676	69.0	75.4	72.2
50	127	229	9685	61.9	67.4	64.6
45	114	225	8694	54.9	59.8	57.4
40	102	221	7779	48.5	53.0	50.8
35	89	216	6787	41.9	45.6	43.8
30	76	210	5796	35.4	38.6	37.0
25	63	203	4804	29.3	31.9	30.6
20	51	195	3889	23.9	25.8	24.8
15	38	184	2898	18.1	19.6	18.8
11	27	172	2059	13.4	14.4	13.9

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19370	141.5	147.8	144.6
95	241	252	18378	131.8	137.5	134.6
90	229	250	17463	123.3	128.6	126.0
85	216	248	16471	114.4	119.3	116.8
80	203	246	15480	105.9	110.3	108.1
75	191	244	14565	98.3	102.3	100.3
70	178	241	13574	90.3	94.1	92.2
65	165	238	12582	82.6	86.0	84.3
60	152	235	11591	75.1	78.2	76.6
55	140	232	10676	68.5	71.3	69.9
50	127	229	9685	61.5	63.9	62.7
45	114	225	8693	54.6	56.8	55.7
40	102	221	7778	48.3	50.3	49.3
35	89	216	6787	41.8	43.5	42.6
30	76	210	5796	35.4	36.9	36.2
25	64	204	4880	29.8	30.9	30.4
20	51	195	3889	24.0	24.8	24.4
15	38	184	2898	18.2	18.9	18.5
11	27	172	2059	13.5	13.9	13.7

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
--	--	------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	19370	143.7	152.2	148.0
95	241	252	18378	133.6	141.4	137.5
90	229	250	17463	124.8	132.0	128.4
85	216	248	16472	115.6	122.2	118.9
80	203	246	15480	106.8	112.8	109.8
75	191	244	14565	99.0	104.6	101.8
70	178	241	13574	90.9	95.9	93.4
65	165	238	12583	83.0	87.7	85.4
60	152	235	11591	75.4	79.6	77.5
55	140	232	10676	68.6	72.4	70.5
50	127	229	9685	61.5	64.9	63.2
45	114	225	8693	54.7	57.6	56.2
40	102	221	7778	48.4	51.1	49.8
35	89	216	6787	41.8	44.0	42.9
30	76	210	5796	35.5	37.3	36.4
25	64	204	4881	29.7	31.3	30.5
20	51	195	3889	23.9	25.0	24.4
15	38	184	2898	18.1	19.0	18.6
11	27	172	2059	13.4	14.0	13.7

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3F41G08MB EAN: 4058352729212	LP number 59559_50
--	--	-------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	19370.0	146.7
5.0	19370.0	141.5
15.0	19370.0	143.7