


Photometric test report


Family Floodlight FL11	Order number: 5XA779119T02FB EAN: 4069025139528		LP number 59517_120
	Version	standard bracket	serial documentation 09.08.2024
	Optic	asymmetric distribution PL33T	
	Cover	toughened safety glass	siteco
	Lamps	LED 5700 K CRI ≥ 70	
	Controlgear	ECG-DALI	
	Rated values	Ta = 10 °C Net luminous flux = 164390 lm Power consumption = 1262.3 W Luminous efficacy = 130.2 lm/W	

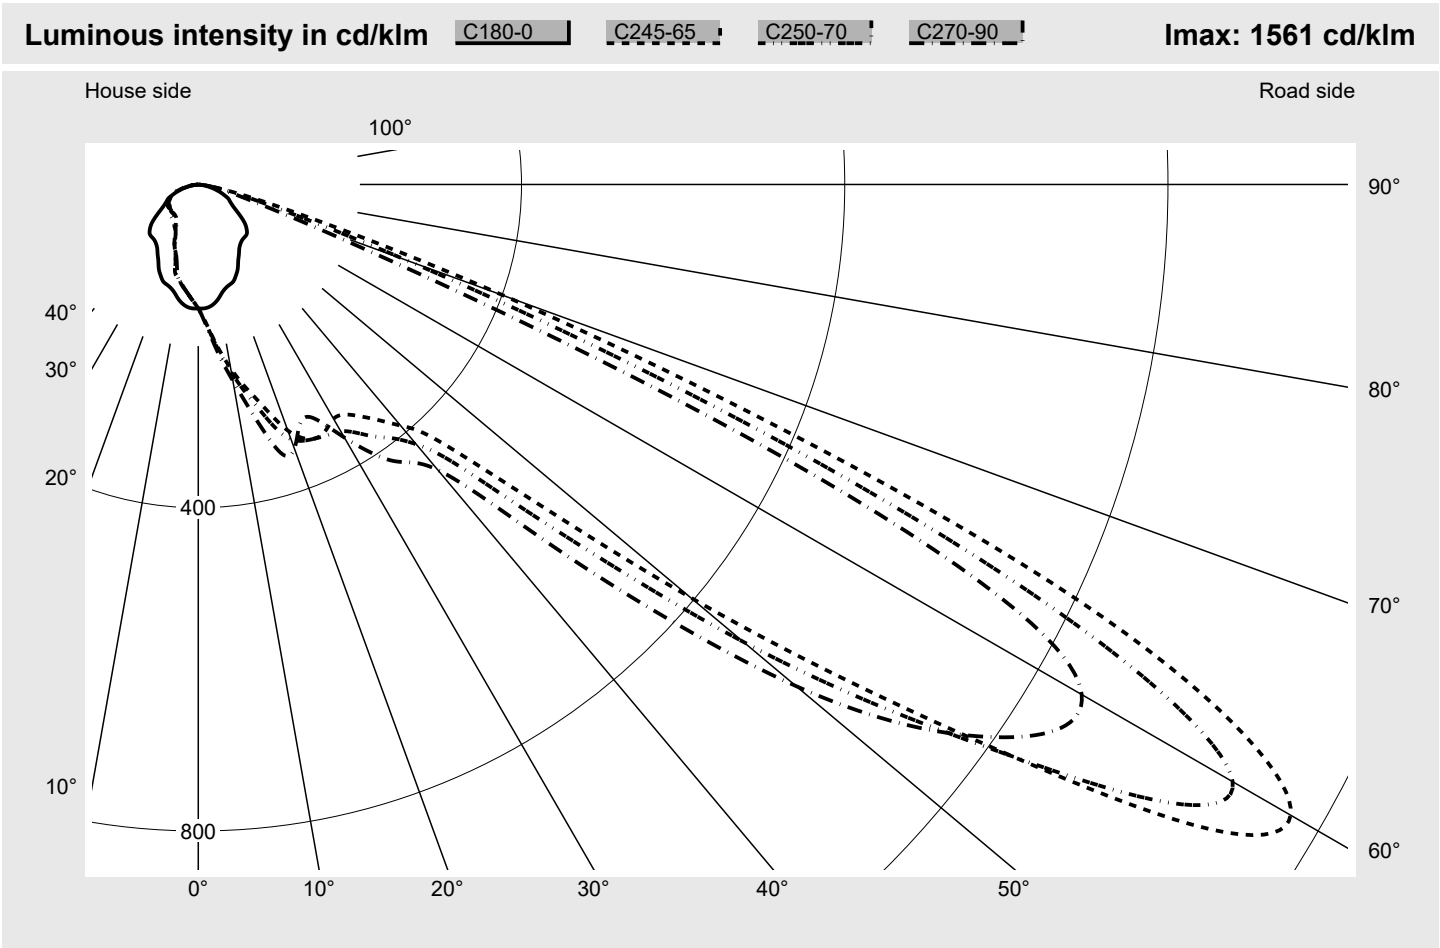

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G4
Eta 0° - 90°	100.0%	Imax 70°	438.4
Eta 90° - 180°	0.0%	Imax 80°	22.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Floodlight FL11	Order number: 5XA779119T02FB EAN: 4069025139528	LP number 59517_120
Envelope curve in cd/klm	KMK 60° KMK 57.5° KMK 55° KMK 52.5°	sit eco

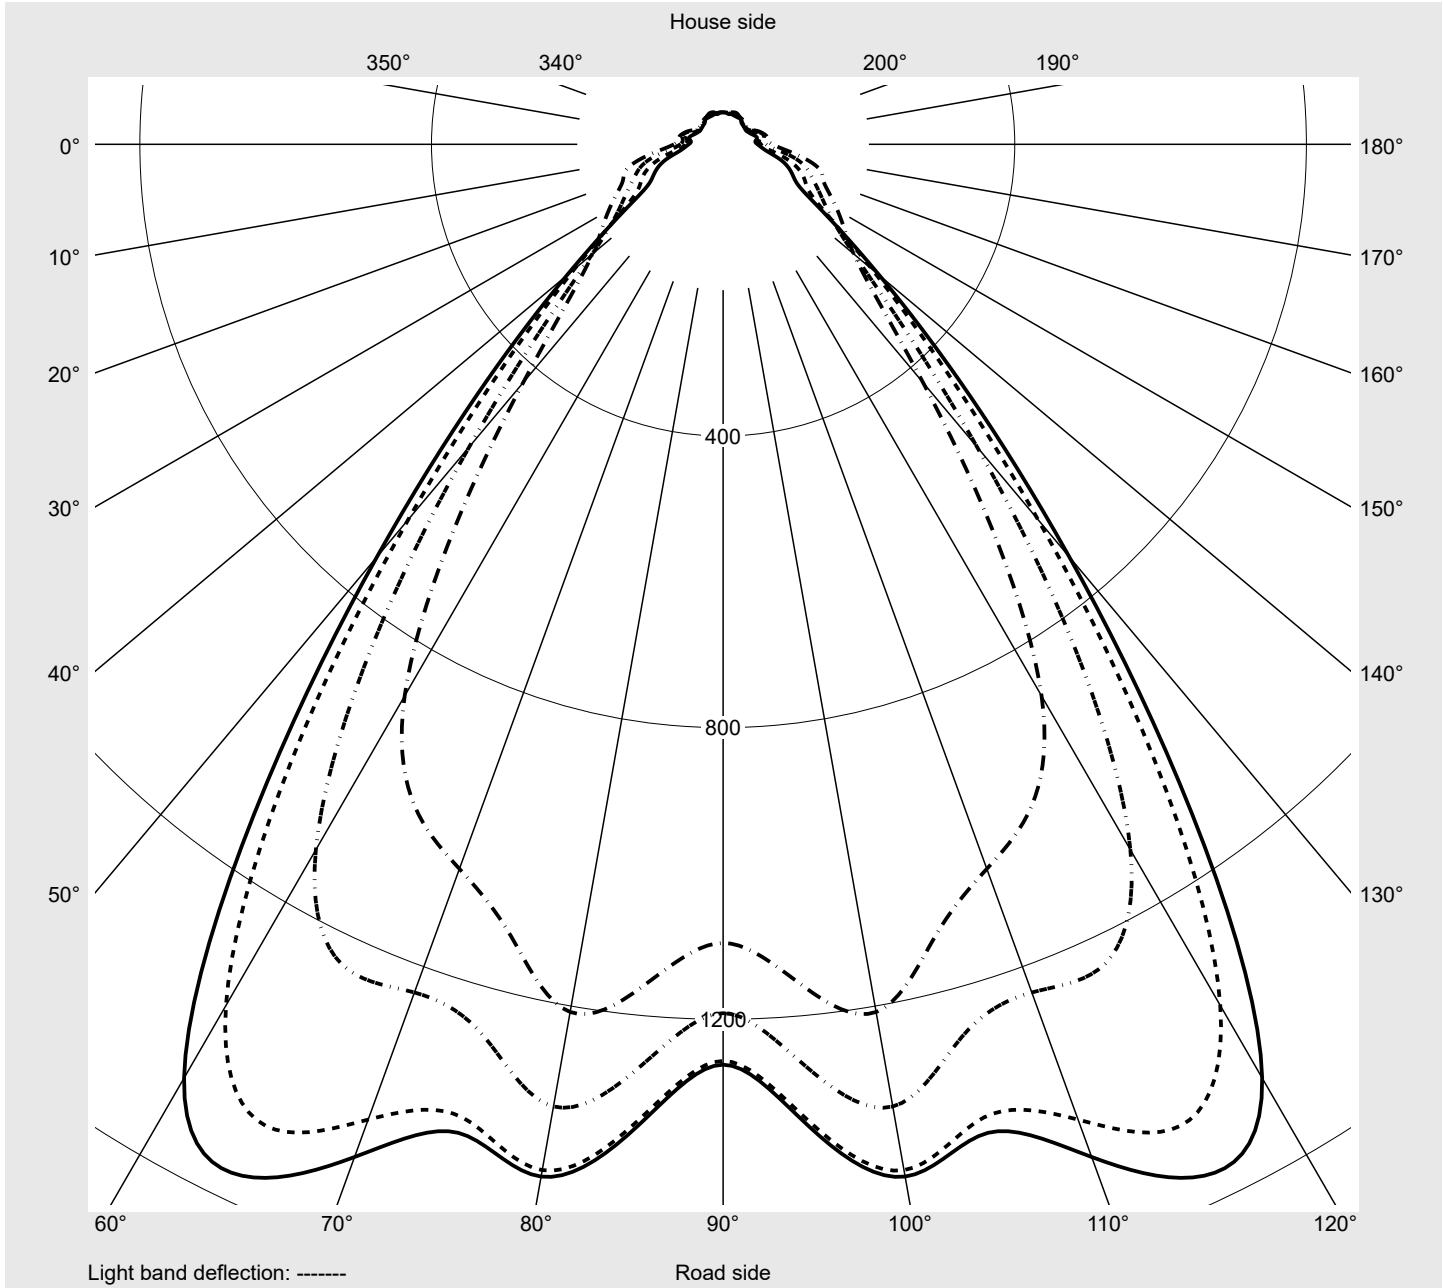

Photometric test report

Family Floodlight FL11	Order number: 5XA779119T02FB EAN: 4069025139528	LP number 59517_120
---------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	153.5	154.7	156.0	157.2	158.4	159.5	160.6	161.7	162.7	163.7	164.6	165.4	166.2
5,0°	152.2	154.7	157.5	160.4	163.2	166.0	168.9	171.8	174.6	177.3	179.8	182.2	184.4
7,5°	148.8	152.6	156.9	161.4	165.9	170.6	175.9	180.9	185.9	191.0	196.0	200.7	205.0
10,0°	143.5	148.0	153.6	159.8	166.5	173.4	180.8	188.8	196.8	204.4	211.8	218.7	225.1
12,5°	136.9	142.5	149.3	157.0	165.3	174.6	185.0	195.6	206.1	216.0	225.4	234.7	243.8
15,0°	132.4	139.4	147.4	156.2	165.8	176.6	188.6	201.1	213.3	225.3	237.2	248.9	261.0
17,5°	129.8	138.9	148.6	158.9	170.0	182.1	195.0	207.8	220.7	234.1	248.2	263.6	280.5
20,0°	127.4	138.0	149.7	162.4	175.8	189.2	202.6	216.6	231.7	247.4	265.4	285.7	306.3
22,5°	121.8	134.6	148.8	164.4	179.8	194.7	210.5	229.0	248.6	269.7	291.2	312.3	329.5
25,0°	115.4	128.3	144.2	162.3	179.5	196.7	217.6	241.2	264.8	286.9	307.6	325.1	338.1
27,5°	107.0	120.3	137.3	156.9	176.4	200.1	228.1	254.7	276.7	291.5	303.3	315.3	329.3
30,0°	100.5	112.4	130.0	152.0	177.7	209.2	242.0	270.6	283.9	285.3	286.8	295.9	313.6
32,5°	94.4	106.8	125.8	153.6	186.7	224.7	263.0	287.7	287.8	278.9	276.0	286.6	309.0
35,0°	90.6	102.5	125.1	157.8	197.1	241.6	281.0	294.7	287.3	277.3	277.0	293.5	320.0
37,5°	88.2	102.3	128.5	162.3	205.4	253.8	283.2	285.2	279.0	277.2	283.6	304.3	336.6
40,0°	87.1	102.6	129.4	167.8	212.0	255.2	271.2	268.6	270.6	280.5	293.2	316.4	352.3
42,5°	86.6	103.1	132.1	176.4	217.8	247.4	255.2	255.7	269.9	288.1	304.2	330.1	371.6
45,0°	85.2	102.9	135.1	178.0	211.2	227.5	236.8	250.0	272.6	292.9	312.1	352.6	419.7
47,5°	81.1	101.2	135.7	170.5	193.7	203.3	220.2	242.8	265.2	289.3	324.4	401.1	514.1
50,0°	75.5	96.5	130.7	157.0	169.6	180.7	202.2	225.7	248.3	284.1	357.0	499.5	672.6
52,5°	67.5	85.1	114.4	138.2	146.4	161.2	181.1	203.2	233.8	297.3	426.7	642.1	873.6
55,0°	58.9	70.4	95.7	116.2	129.0	142.9	159.9	185.0	234.4	340.3	541.8	838.2	1117.2
57,5°	51.9	57.8	76.4	97.8	114.3	124.8	140.4	183.1	266.7	417.4	671.9	1032.2	1363.8
60,0°	47.2	53.4	63.8	81.5	96.1	106.8	125.4	179.1	280.4	458.4	738.7	1121.7	1478.7
62,5°	43.7	49.2	55.7	67.7	80.2	91.2	111.0	164.1	263.8	433.5	687.6	1065.2	1453.7
65,0°	40.8	45.0	49.9	59.2	68.7	76.5	91.9	130.2	201.3	339.7	544.8	850.5	1236.6
67,5°	35.3	40.1	43.3	50.2	55.8	59.1	65.1	85.3	130.7	222.0	359.1	551.7	806.5
70,0°	30.2	34.6	38.1	42.9	45.0	44.1	45.3	54.9	81.1	138.7	228.3	341.7	438.4
72,5°	24.5	28.7	32.5	35.0	35.1	34.5	31.8	35.9	51.0	83.4	130.3	190.0	237.4
75,0°	19.4	22.3	25.7	26.9	25.7	26.2	22.6	24.7	33.2	53.0	80.9	114.0	134.8
77,5°	13.6	16.3	18.0	18.2	18.0	19.1	16.4	18.0	23.2	34.4	46.3	54.8	54.6
80,0°	9.1	10.4	11.2	9.6	11.2	12.0	10.2	11.6	13.8	14.2	11.7	12.6	15.7
82,5°	4.9	6.0	5.5	5.0	5.8	6.1	5.5	6.1	6.8	5.9	5.9	6.4	7.8
85,0°	2.1	2.4	2.2	2.2	2.2	2.4	2.2	2.4	2.5	2.5	2.7	2.9	3.2
87,5°	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779119T02FB EAN: 4069025139528										LP number 59517_120	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	166.9	167.5	167.9	168.2	168.8	168.9	152.6	151.7	150.7	149.8	148.9	148.1	147.4
5,0°	186.3	188.0	189.3	190.2	191.3	191.5	150.2	148.3	146.7	145.1	143.6	142.5	141.5
7,5°	208.8	212.1	214.8	216.7	218.3	218.7	145.9	143.4	141.5	139.7	137.9	136.3	135.0
10,0°	231.0	236.2	240.4	243.5	246.0	246.7	139.5	136.7	134.6	132.5	130.5	129.3	128.3
12,5°	252.8	261.1	268.3	274.0	278.3	279.4	132.5	129.3	126.9	124.7	123.0	122.1	121.4
15,0°	273.5	286.1	297.8	307.8	315.3	317.7	127.1	123.5	120.2	117.9	116.3	115.0	113.5
17,5°	298.5	315.1	329.1	340.6	348.5	351.0	123.1	118.3	114.4	111.7	109.6	107.5	106.4
20,0°	324.0	335.4	341.5	345.2	347.5	347.9	118.7	112.6	108.3	105.2	102.6	100.9	99.8
22,5°	339.9	343.1	339.3	333.0	327.7	325.5	112.5	105.7	100.8	97.4	95.0	93.3	92.6
25,0°	346.1	346.4	339.3	329.1	320.7	317.3	104.8	97.7	92.8	89.5	87.3	85.6	77.4
27,5°	342.4	349.2	346.7	340.0	334.7	332.7	97.3	90.2	85.6	82.6	80.4	72.7	68.0
30,0°	334.8	352.6	361.4	361.9	361.0	361.6	91.0	84.4	80.2	77.6	73.3	64.6	63.0
32,5°	337.6	364.3	380.7	386.5	388.9	391.4	86.7	80.7	76.4	73.9	66.1	61.6	60.0
35,0°	350.3	380.8	400.8	409.8	413.8	417.1	83.0	78.2	74.3	70.9	63.0	60.4	57.6
37,5°	367.8	396.0	417.4	427.0	431.0	433.7	80.3	76.6	73.7	67.3	62.4	58.4	54.4
40,0°	389.5	419.7	441.8	455.1	459.5	461.1	78.4	74.4	72.1	63.9	59.0	55.4	52.1
42,5°	420.8	465.9	501.1	527.7	532.2	532.2	76.3	71.5	68.1	62.2	56.9	53.2	50.4
45,0°	495.0	564.9	622.6	666.4	664.2	658.6	73.9	68.2	63.4	59.3	54.1	50.9	48.8
47,5°	618.4	704.8	777.8	839.5	823.9	808.3	71.2	66.1	60.5	56.2	50.8	47.2	45.6
50,0°	795.0	880.6	957.4	1034.8	999.6	965.7	67.1	64.2	58.3	53.3	47.6	43.8	42.4
52,5°	1001.2	1057.5	1124.3	1208.4	1151.9	1095.4	61.5	60.9	57.0	52.0	45.9	41.6	40.2
55,0°	1239.9	1237.9	1266.8	1340.0	1266.8	1191.7	55.6	56.8	55.7	50.2	44.4	40.0	38.7
57,5°	1485.1	1423.5	1381.8	1428.6	1344.5	1257.2	49.4	51.6	51.0	45.9	41.3	38.5	37.7
60,0°	1560.9	1478.1	1403.6	1437.6	1352.2	1262.3	44.3	47.2	45.2	41.3	38.6	36.8	36.7
62,5°	1443.4	1316.9	1237.3	1277.1	1214.8	1141.6	40.2	43.6	41.2	38.2	38.0	34.7	34.7
65,0°	1162.2	977.8	893.2	903.2	851.1	796.1	35.6	39.6	37.9	35.1	37.7	33.5	32.3
67,5°	745.1	572.2	483.6	445.3	393.9	356.5	31.0	34.3	34.0	32.0	34.0	30.2	29.8
70,0°	403.1	275.5	207.6	185.5	164.2	149.9	27.1	28.2	29.4	27.6	28.2	25.8	26.1
72,5°	188.8	127.1	103.1	92.6	82.9	76.5	22.7	23.9	24.0	22.5	22.0	21.2	21.5
75,0°	91.4	68.9	61.6	56.0	49.6	47.0	17.3	17.3	17.5	17.6	18.7	19.3	17.4
77,5°	45.5	41.6	38.0	36.2	30.1	29.3	11.8	11.7	12.1	13.3	13.4	16.2	13.8
80,0°	20.0	22.0	21.6	21.0	17.8	16.6	7.6	7.9	8.2	8.4	9.1	9.7	8.9
82,5°	9.7	9.9	9.9	10.6	9.1	8.5	4.3	4.8	5.2	5.3	5.3	4.8	4.8
85,0°	3.4	3.5	3.5	3.8	3.7	3.6	2.0	2.2	2.6	2.5	2.5	2.2	2.4
87,5°	1.3	1.3	1.4	1.4	1.5	1.5	0.7	0.7	0.8	0.9	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779119T02FB EAN: 4069025139528										LP number 59517_120	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	0.2	0.2
2,5°	146.7	146.1	145.6	145.1	144.8	144.6	144.5	144.2	144.1	144.3	144.3	1.9	2.1
5,0°	140.4	139.4	138.7	138.0	137.6	137.3	137.0	136.8	136.7	136.8	136.8	3.8	5.9
7,5°	133.9	133.0	132.2	131.6	131.0	130.7	130.4	130.2	129.9	130.0	130.0	5.8	11.7
10,0°	127.6	126.9	126.0	125.1	124.4	124.1	123.8	123.5	123.5	123.5	123.5	7.8	19.5
12,5°	120.3	119.5	118.9	118.3	117.8	117.5	117.2	117.1	116.9	117.0	116.9	9.9	29.4
15,0°	112.8	112.0	111.7	111.7	111.9	111.5	109.2	106.3	104.1	102.8	102.3	12.0	41.5
17,5°	105.4	104.8	104.4	100.3	95.6	93.4	92.2	91.6	91.3	91.2	91.3	14.2	55.7
20,0°	99.1	93.9	87.9	86.9	86.8	86.0	85.0	84.2	84.0	84.3	84.4	16.2	71.9
22,5°	84.6	80.6	80.5	80.1	79.0	77.2	75.5	74.4	74.3	74.7	75.0	18.1	90.0
25,0°	74.4	74.2	73.7	72.7	70.7	68.1	65.9	65.0	65.4	66.1	66.2	19.7	109.6
27,5°	67.7	67.3	66.5	65.5	63.5	60.7	58.7	58.5	59.3	60.6	61.8	21.1	130.8
30,0°	62.5	61.8	60.9	59.9	58.2	55.7	54.1	54.0	55.0	57.5	59.1	22.7	153.4
32,5°	59.1	58.1	56.8	55.7	53.9	51.4	50.2	50.6	52.7	54.2	55.1	24.6	178.0
35,0°	55.4	54.0	52.7	51.5	50.2	48.8	48.4	50.2	51.3	52.2	53.5	26.8	204.8
37,5°	52.0	50.9	49.8	49.0	48.3	47.5	48.0	49.5	50.0	51.4	52.7	28.9	233.8
40,0°	49.6	48.7	48.4	47.4	46.9	46.9	47.8	48.7	49.5	50.5	51.9	31.2	264.9
42,5°	47.9	47.0	46.8	46.3	46.9	47.0	47.5	48.1	48.7	50.0	51.3	34.4	299.4
45,0°	47.1	45.9	46.2	46.1	47.1	47.4	47.1	47.3	47.6	48.7	49.8	39.5	338.9
47,5°	45.0	44.4	44.4	45.0	46.0	46.5	46.1	46.2	46.2	46.7	47.5	46.0	384.8
50,0°	42.2	42.4	43.1	44.4	45.1	46.4	46.2	45.9	45.3	45.1	45.5	54.2	439.1
52,5°	39.9	40.9	42.7	43.5	44.4	46.3	46.6	45.5	44.6	44.2	44.4	63.3	502.4
55,0°	38.6	39.7	41.9	42.7	44.3	45.5	46.0	44.6	43.9	43.7	43.7	73.4	575.8
57,5°	37.7	38.8	40.3	42.6	43.6	44.1	44.3	43.7	43.2	44.3	44.2	83.8	659.6
60,0°	37.1	37.8	39.0	41.9	41.9	42.0	42.3	42.8	42.2	43.6	43.8	88.5	748.1
62,5°	35.3	36.0	37.3	38.7	39.6	39.7	40.2	40.6	39.9	40.7	40.9	83.1	831.2
65,0°	32.7	34.0	35.1	35.5	36.2	38.3	38.5	38.9	38.5	37.7	37.8	66.0	897.2
67,5°	30.0	31.7	32.4	32.7	33.6	36.0	36.4	37.5	37.3	36.0	35.7	41.6	938.7
70,0°	26.7	28.8	28.1	29.0	30.7	32.1	33.6	35.6	35.1	34.4	34.3	24.3	963.1
72,5°	22.7	24.0	22.5	23.6	25.5	27.4	29.7	32.1	32.0	31.6	31.5	14.7	977.8
75,0°	17.5	18.2	18.7	19.6	21.2	23.0	25.5	27.2	26.0	23.6	22.4	9.7	987.5
77,5°	13.1	13.8	14.6	15.7	16.8	18.1	20.1	19.5	17.1	16.5	16.4	6.1	993.6
80,0°	8.7	10.1	10.8	11.9	12.2	12.7	13.4	12.7	12.1	12.1	12.0	3.3	996.9
82,5°	5.4	6.5	7.4	8.0	8.4	8.6	8.9	8.6	8.2	8.1	8.1	1.9	998.8
85,0°	2.7	3.4	4.1	4.1	4.2	4.5	4.3	4.1	4.1	4.2	4.3	0.8	999.6
87,5°	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.6	2.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779119T02FB EAN: 4069025139528	LP number 59517_120
Dimming levels table environmental temperature: 10°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	163927	1257.2
95	237	251	156189	1176.2
90	221	249	148153	1095.8
85	205	246	139695	1015.7
80	190	243	131558	941.3
75	176	241	123567	871.8
70	162	238	115264	803.0
65	148	234	106663	734.0
60	135	231	98519	670.6
55	122	227	90223	607.5
50	110	223	82319	549.4
45	98	219	74189	491.6
40	86	214	65835	434.1
35	74	209	57357	376.8
30	63	203	49246	324.8
25	52	196	40981	273.3
20	41	187	32526	222.1
15	31	177	24797	176.4
10	20	161	16217	116.2
5	10	136	8188	65.2
1	2	77	1520	25.1

Dimming levels table environmental temperature: 25°C	
---	--

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	203	246	135160	999.2
80	188	243	127306	925.0
75	173	240	119122	851.0
70	159	237	111150	782.3
65	146	234	103355	718.7
60	133	230	95500	655.4
55	120	227	87455	592.8
50	108	223	79730	535.2
45	96	219	71804	477.9
40	84	214	63608	420.8
35	73	208	55946	368.7
30	62	202	48002	317.3
25	51	195	39805	266.3
20	40	186	31476	215.6
15	30	176	23911	170.1
10	20	161	16136	115.1
5	10	136	8159	64.6
1	2	77	1516	24.8

Photometric test report

Family Floodlight FL11	Order number: 5XA779119T02FB EAN: 4069025139528	LP number 59517_120
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
10.0	164390.0	1262.3
25.0	136300.0	1010.2