
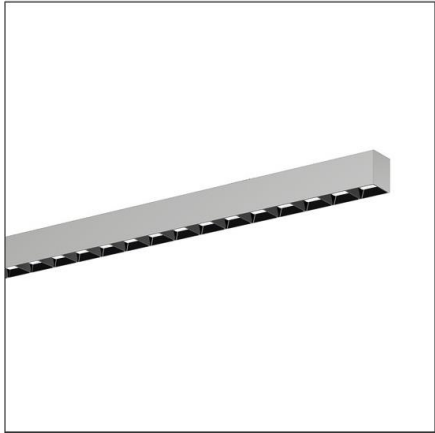


Photometric test report

Family Silica® 21	Order number: 51MX21DA44SB EAN: 4058352895917	LP number 59268_186
	Version	surface-mounted luminaire, reflector, black, direct distribution, narrow distribution, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 4320 lm Power consumption = 25.6 W Luminous efficacy = 168.8 lm/W
		serial documentation 17.12.2024
		siteco

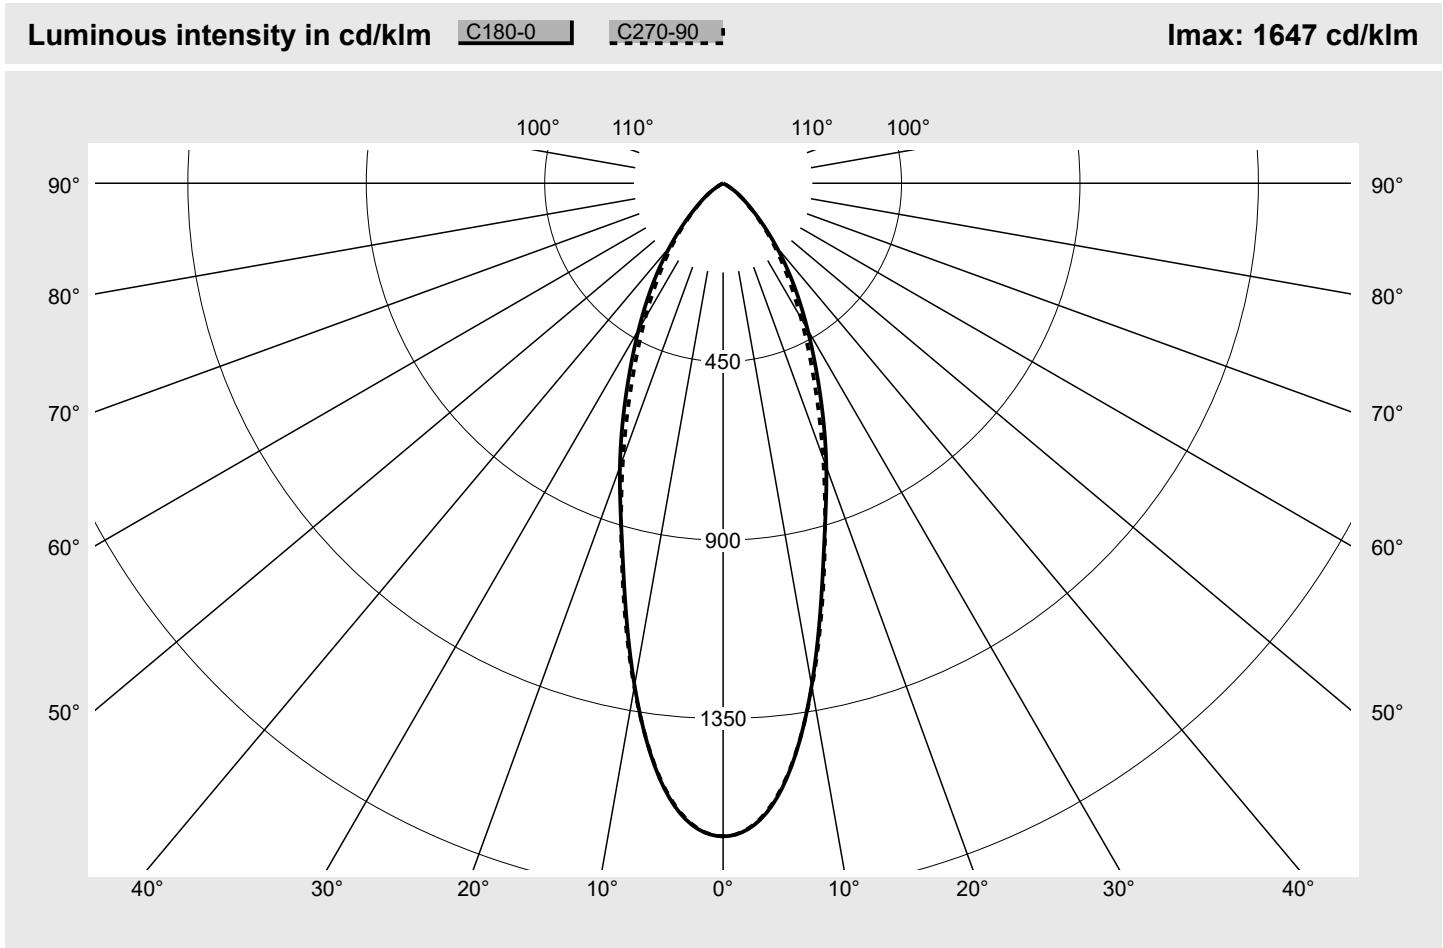

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=87 N2=99 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX21DA44SB EAN: 4058352895917	LP number 59268_186
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	1647.1	1647.1	1647.1	1647.1	1647.1	1647.1	1647.1	9.9	9.9
5°	1556.0	1552.2	1545.4	1552.7	1555.3	1549.6	1552.8	74.1	84.0
10°	1286.3	1288.4	1295.0	1311.1	1307.0	1291.2	1290.4	123.4	207.4
15°	978.4	985.5	998.6	1011.3	1007.8	991.2	986.9	141.3	348.7
20°	761.0	758.1	743.8	731.7	736.2	737.5	737.7	139.2	488.0
25°	575.0	565.5	534.1	513.6	528.8	542.8	539.9	125.2	613.2
30°	426.0	419.2	386.1	366.4	385.1	401.9	392.9	108.2	721.3
35°	308.0	307.0	281.1	264.9	280.7	295.5	280.0	90.3	811.6
40°	209.2	211.1	196.7	188.3	198.2	205.5	193.0	70.5	882.1
45°	130.5	131.9	127.1	124.8	130.2	130.3	123.1	49.8	932.0
50°	76.5	78.3	78.7	78.6	80.6	77.5	73.2	32.8	964.8
55°	42.1	44.0	46.1	47.2	47.6	43.6	40.6	20.2	985.0
60°	13.4	16.3	24.8	26.9	25.6	18.0	14.5	9.9	994.9
65°	4.2	5.2	7.6	13.7	8.3	5.3	4.6	3.7	998.6
70°	1.7	1.8	1.5	2.7	1.9	2.1	2.2	1.0	999.6
75°	0.3	0.5	0.5	0.6	0.6	0.6	0.4	0.3	999.9
80°	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.1	999.9
85°	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX21DA44SB EAN: 4058352895917	LP number 59268_186
----------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	17.1	18.3	17.5	18.6	18.9	17.0	18.2	17.4	18.5	18.8
	3H	17.0	18.0	17.3	18.4	18.7	16.9	17.9	17.2	18.3	18.6
	4H	16.9	17.9	17.3	18.2	18.6	16.8	17.8	17.2	18.1	18.5
	6H	16.8	17.7	17.3	18.1	18.5	16.7	17.6	17.2	18.0	18.4
	8H	16.9	17.6	17.3	18.0	18.4	16.8	17.5	17.2	17.9	18.3
	12H	16.9	17.5	17.3	17.9	18.3	16.8	17.4	17.2	17.8	18.2
4H	2H	17.0	18.0	17.4	18.4	18.7	16.9	17.9	17.3	18.3	18.6
	3H	16.9	17.7	17.3	18.1	18.5	16.8	17.6	17.2	18.0	18.4
	4H	16.8	17.5	17.2	17.9	18.3	16.7	17.4	17.1	17.8	18.2
	6H	16.7	17.3	17.2	17.7	18.2	16.6	17.2	17.1	17.6	18.1
	8H	16.6	17.2	17.1	17.6	18.1	16.6	17.1	17.0	17.5	18.0
	12H	16.6	17.1	17.1	17.5	18.0	16.5	17.0	17.0	17.4	17.9
8H	4H	16.6	17.2	17.1	17.6	18.1	16.6	17.1	17.0	17.5	18.0
	6H	16.5	17.0	17.0	17.4	18.0	16.4	16.9	16.9	17.3	17.9
	8H	16.5	16.8	17.0	17.3	17.9	16.4	16.8	16.9	17.2	17.8
	12H	16.5	16.7	17.0	17.2	17.8	16.4	16.6	16.9	17.1	17.7
12H	4H	16.6	17.1	17.1	17.5	18.0	16.6	17.0	17.0	17.4	17.9
	6H	16.5	16.8	17.0	17.3	17.9	16.4	16.8	16.9	17.2	17.8
	8H	16.5	16.7	17.0	17.2	17.8	16.4	16.6	16.9	17.1	17.7

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1176 B = 49	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
		Luminance in cd/m²					
γ							
45°	13837.3	13986.0	13475.6	13233.6	13804.1	13819.2	13053.7
50°	8925.4	9130.3	9184.1	9166.8	9400.7	9037.8	8535.2
55°	5509.0	5751.6	6021.4	6172.9	6227.0	5700.7	5312.7
60°	2003.8	2439.0	3713.1	4029.6	3843.3	2697.1	2177.5
65°	736.4	924.0	1355.3	2427.2	1477.0	934.7	818.1
70°	378.5	403.1	339.5	585.9	413.4	465.3	474.3
75°	95.9	135.3	133.5	171.2	166.3	159.3	130.1
80°	30.7	41.0	41.0	50.9	66.5	76.4	81.6
85°	61.1	61.1	71.4	86.9	117.0	137.6	142.8

Photometric test report

Family
Silica® 21

Order number: 51MX21DA44SB
EAN: 4058352895917

LP number
59268_186

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

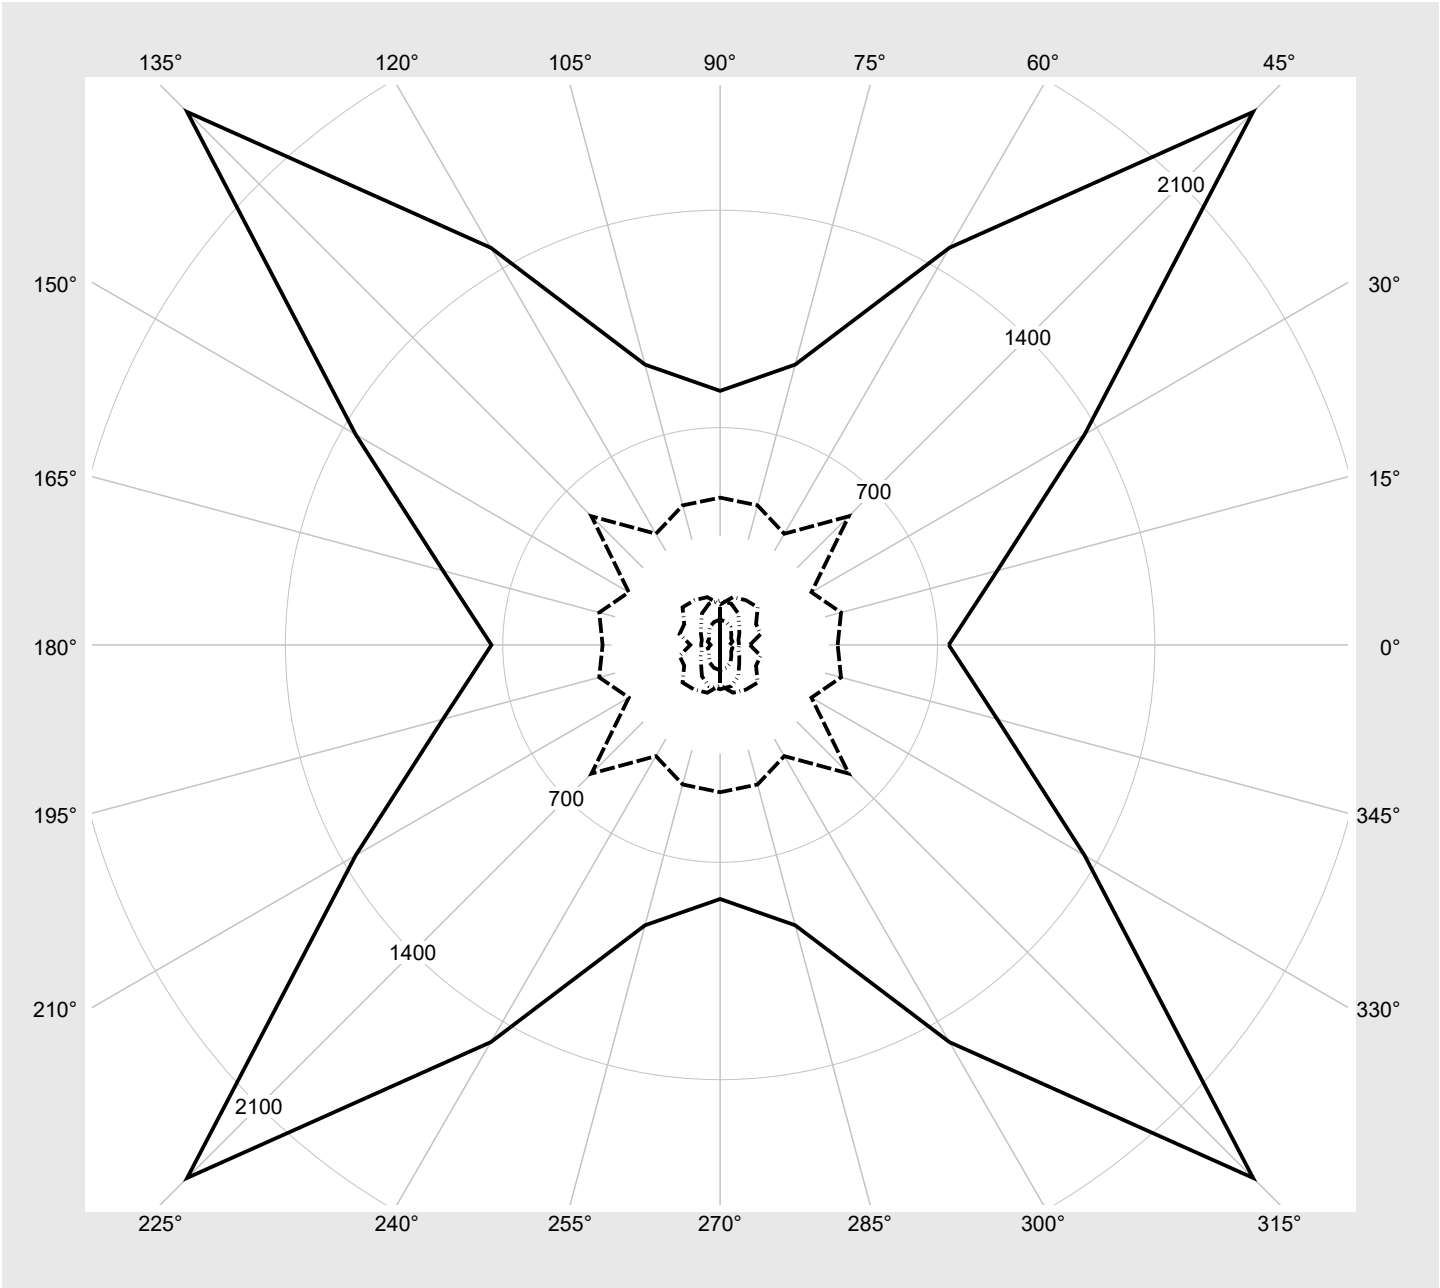

Photometric test report

Family Silica® 21	Order number: 51MX21DA44SB EAN: 4058352895917	LP number 59268_186
Dimming levels table		environmental temperature: 25°C 

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4320	25.6
95	240	252	4096	24.2
90	227	250	3884	22.8
85	214	248	3673	21.5
80	201	245	3461	20.2
75	188	243	3246	18.9
70	175	240	3031	17.5
65	162	238	2813	16.2
60	149	234	2594	15.0
55	136	231	2373	13.7
50	124	228	2168	12.5
45	111	224	1945	11.2
40	98	219	1721	10.0
35	86	214	1513	8.8
30	74	209	1304	7.7
25	61	202	1076	6.5
20	49	194	865	5.4
15	37	183	651	4.3
10	25	169	437	3.2
5	13	145	224	1.9
3	8	127	134	1.2