

## Photometric test report

**Family**  
**Licross® 11 Recessed**

**Order number: 51TL12DN49XFD**  
**EAN: 4058352418178**

**LP number**  
**58637\_28**



**Version** cover frosted, wide distribution, high visual comfort

**Lamps** LED 4000 K | CRI ≥ 80

**Controlgear** ECG-DALI

**Setting** AC-mode


**Rated values** Net luminous flux = 9140 lm  
Power consumption = 55.4 W  
Luminous efficacy = 165 lm/W

**serial**  
**documentation**  
**26.08.2020**

**sitEco**

**Luminous intensity in cd/klm** **C180-0** **C270-90**

**Imax: 498 cd/klm**

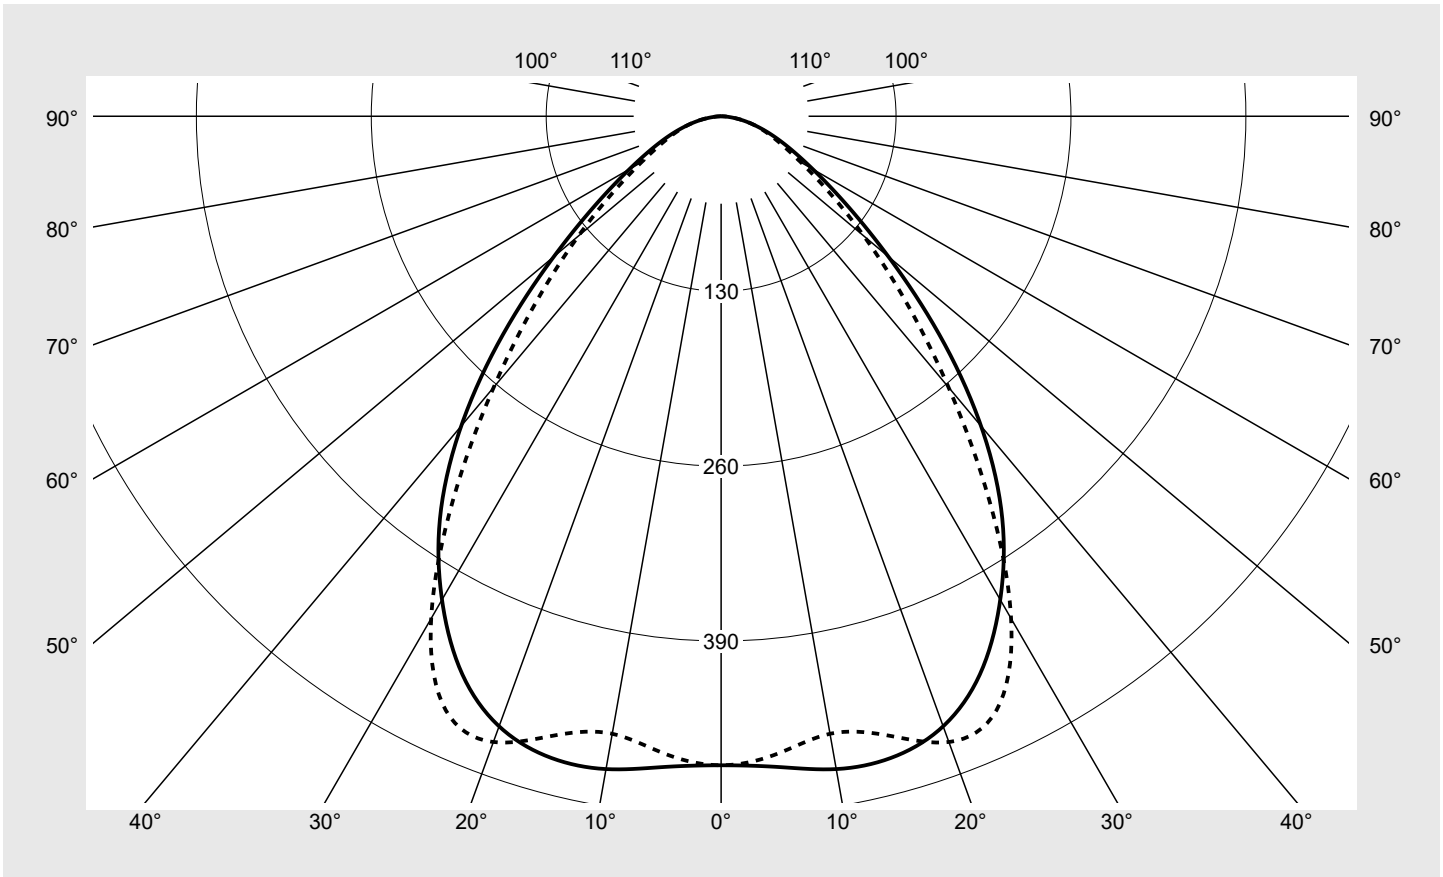

### Classifications

DIN 5040 A 5 0  
CIE N1=67 N2=92 N3=99  
N4=100 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 11 Recessed</b>	Order number: <b>51TL12DN49XFD</b> EAN: <b>4058352418178</b>	LP number <b>58637_28</b>
---------------------------------------	---	------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	482.3	482.3	482.3	482.3	482.3	482.3	482.3	2.9	2.9
5°	485.4	482.8	478.2	477.5	477.4	475.9	475.7	22.9	25.8
10°	492.7	488.2	477.9	471.3	467.6	465.9	466.0	45.2	71.0
15°	493.2	486.1	471.9	467.9	471.0	473.7	476.3	67.5	138.5
20°	482.5	473.5	462.5	471.9	487.1	492.8	494.9	89.9	228.4
25°	456.4	447.1	449.2	479.4	497.6	491.1	485.8	109.5	337.8
30°	414.9	406.8	427.0	475.1	479.0	447.1	431.1	121.4	459.2
35°	364.2	358.0	387.7	436.7	420.7	368.9	346.8	122.0	581.2
40°	300.5	296.3	322.5	357.9	336.0	284.8	262.9	110.4	691.6
45°	229.2	226.3	238.5	259.8	247.2	211.8	193.4	90.1	781.7
50°	162.3	159.3	161.6	173.6	174.5	155.2	138.5	68.2	849.9
55°	112.5	108.0	105.1	112.3	121.6	110.9	97.2	49.6	899.5
60°	78.7	73.1	68.3	73.1	83.7	77.4	68.5	35.5	935.0
65°	56.0	50.2	45.0	48.4	56.8	54.5	49.6	25.5	960.5
70°	39.5	34.5	29.5	32.1	37.8	38.5	36.6	18.1	978.6
75°	26.0	22.0	18.4	20.2	23.9	25.9	25.8	12.0	990.6
80°	14.9	12.2	9.9	10.8	13.0	14.8	15.3	6.8	997.4
85°	5.4	4.3	3.6	4.0	4.7	5.6	5.8	2.5	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL12DN49XFD</b> <b>EAN: 4058352418178</b>	<b>LP number</b> 58637_28
---------------------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.3	23.8	22.7	24.1	24.4	22.4	23.9	22.8	24.2	24.5
	3H	22.8	24.2	23.2	24.5	24.8	23.0	24.3	23.3	24.6	25.0
	4H	23.1	24.3	23.5	24.6	25.0	23.2	24.4	23.6	24.8	25.2
	6H	23.2	24.4	23.6	24.7	25.1	23.4	24.5	23.8	24.9	25.3
	8H	23.3	24.4	23.8	24.7	25.1	23.5	24.5	23.9	24.9	25.3
	12H	23.4	24.3	23.8	24.7	25.1	23.5	24.5	24.0	24.9	25.3
4H	2H	22.5	23.8	22.9	24.1	24.5	22.6	23.9	23.0	24.2	24.6
	3H	23.1	24.2	23.6	24.6	25.0	23.3	24.4	23.8	24.8	25.2
	4H	23.4	24.3	23.9	24.7	25.2	23.7	24.6	24.1	25.0	25.4
	6H	23.6	24.4	24.1	24.9	25.3	24.0	24.7	24.4	25.2	25.6
	8H	23.7	24.4	24.2	24.9	25.4	24.1	24.8	24.5	25.2	25.7
	12H	23.8	24.4	24.3	24.9	25.4	24.1	24.7	24.6	25.2	25.7
8H	4H	23.5	24.2	24.0	24.6	25.1	23.7	24.4	24.2	24.9	25.4
	6H	23.8	24.3	24.2	24.8	25.3	24.1	24.7	24.6	25.1	25.6
	8H	23.8	24.4	24.3	24.8	25.4	24.2	24.7	24.7	25.2	25.7
	12H	23.9	24.3	24.4	24.8	25.4	24.3	24.7	24.8	25.2	25.8
12H	4H	23.5	24.1	24.0	24.6	25.1	23.7	24.4	24.2	24.8	25.3
	6H	23.8	24.3	24.3	24.8	25.3	24.1	24.6	24.6	25.1	25.6
	8H	23.9	24.3	24.4	24.8	25.3	24.2	24.6	24.7	25.1	25.7

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1500</b>
			<b>B = 58</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		34046.1	33623.0	35436.0	38597.5	36722.2	31473.9	28727.2	
50°		26526.5	26042.6	26412.3	28379.5	28525.6	25371.7	22637.8	
55°		20602.4	19778.9	19252.2	20577.0	22280.2	20321.1	17799.5	
60°		16538.1	15368.0	14355.9	15366.3	17577.2	16255.8	14382.4	
65°		13929.3	12468.9	11193.6	12040.6	14121.7	13547.8	12339.9	
70°		12128.8	10591.7	9066.7	9859.2	11605.7	11831.2	11252.2	
75°		10539.5	8939.8	7482.2	8197.4	9688.3	10523.6	10466.8	
80°		8991.5	7367.7	5977.4	6544.9	7837.2	8979.4	9268.6	
85°		6448.9	5217.0	4322.6	4803.5	5685.9	6708.0	6987.7	


**Photometric test report**

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL12DN49XFD</b> <b>EAN: 4058352418178</b>	<b>LP number</b> <b>58637_28</b>
---------------------------------------	---	-------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°  
   $\gamma$  70°  
   $\gamma$  75°  
   $\gamma$  80°  
   $\gamma$  85°

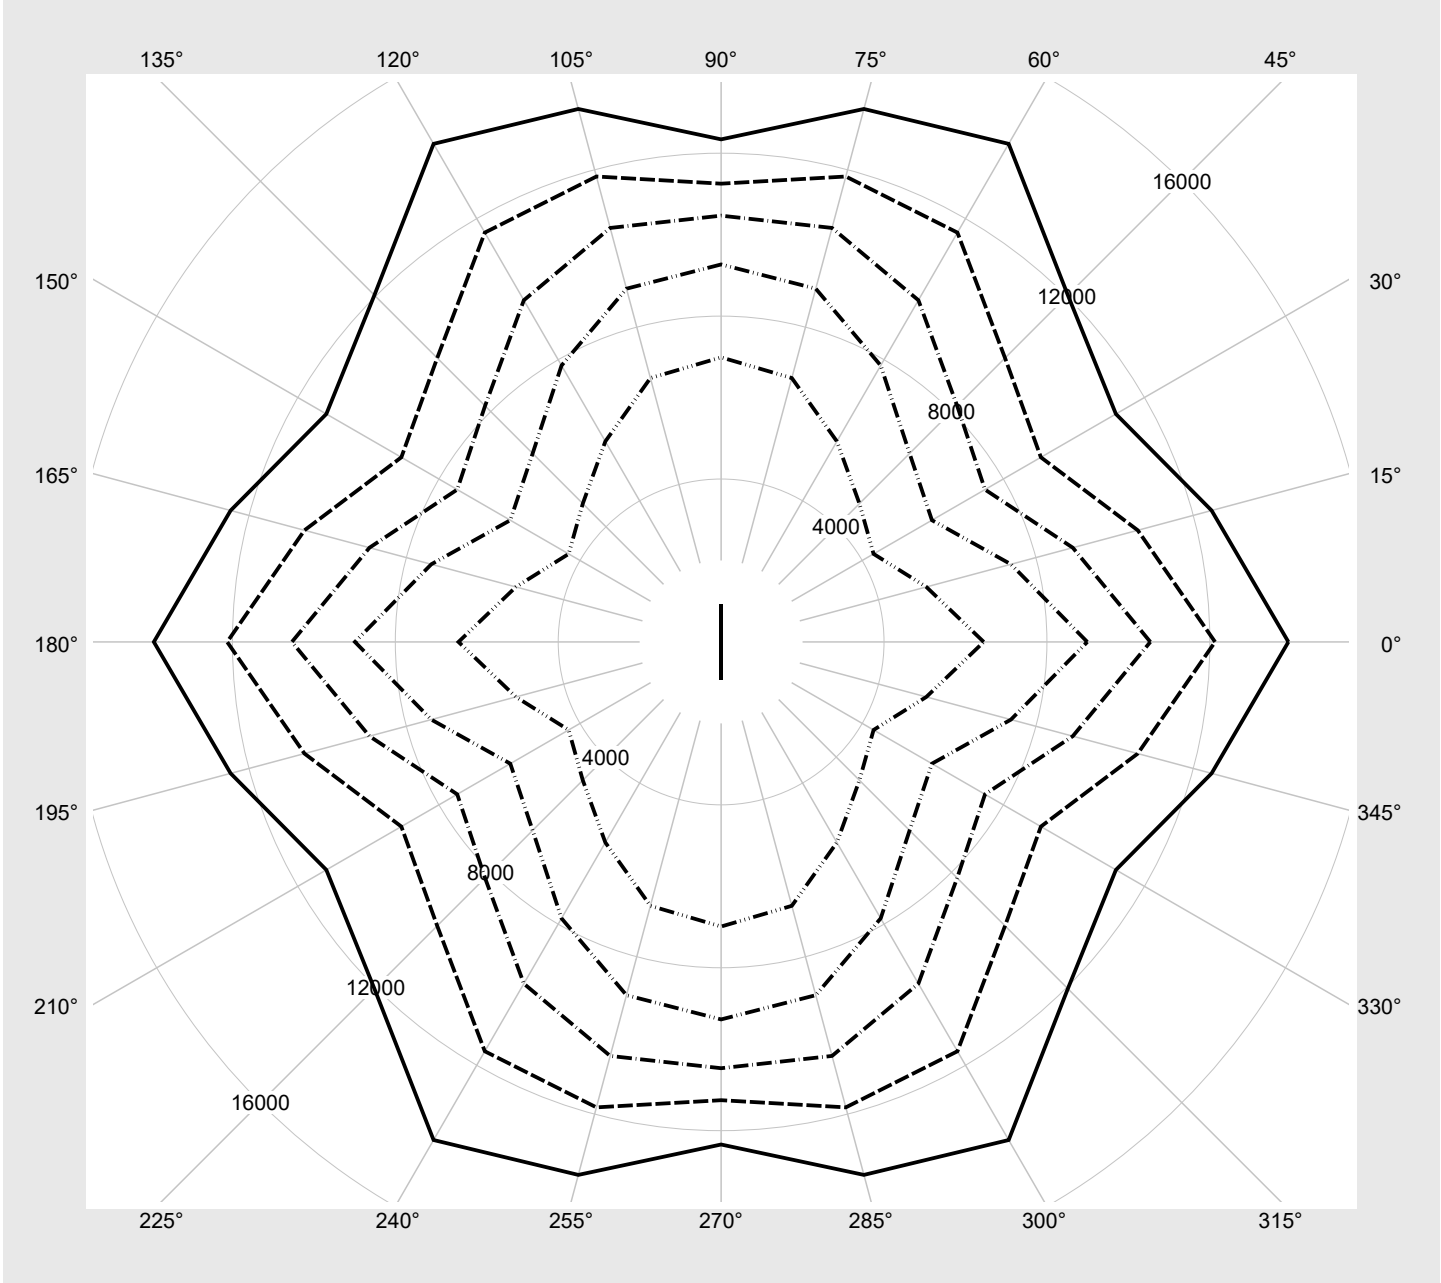

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL12DN49XFD</b> <b>EAN: 4058352418178</b>	<b>LP number</b> <b>58637_28</b>
---------------------------------------	---	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9140	55.4
95	241	252	8695	52.5
90	226	250	8224	49.3
85	213	248	7774	46.3
80	199	245	7314	43.4
75	186	243	6865	40.5
70	173	240	6391	37.7
65	160	237	5942	35.0
60	147	234	5492	32.2
55	134	231	5018	29.4
50	121	227	4569	26.9
45	109	223	4131	24.4
40	96	218	3657	21.7
35	84	213	3193	19.2
30	72	208	2755	16.7
25	60	201	2292	14.1
20	47	192	1817	11.5
15	35	181	1353	9.2
10	24	168	927	7.1
5	13	145	476	4.9