


# Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, structured <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1280 lm Power consumption = 10.5 W Luminous efficacy = 121.9 lm/W	<b>serial documentation</b> <b>08.07.2022</b>
		

**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 652 cd/klm**

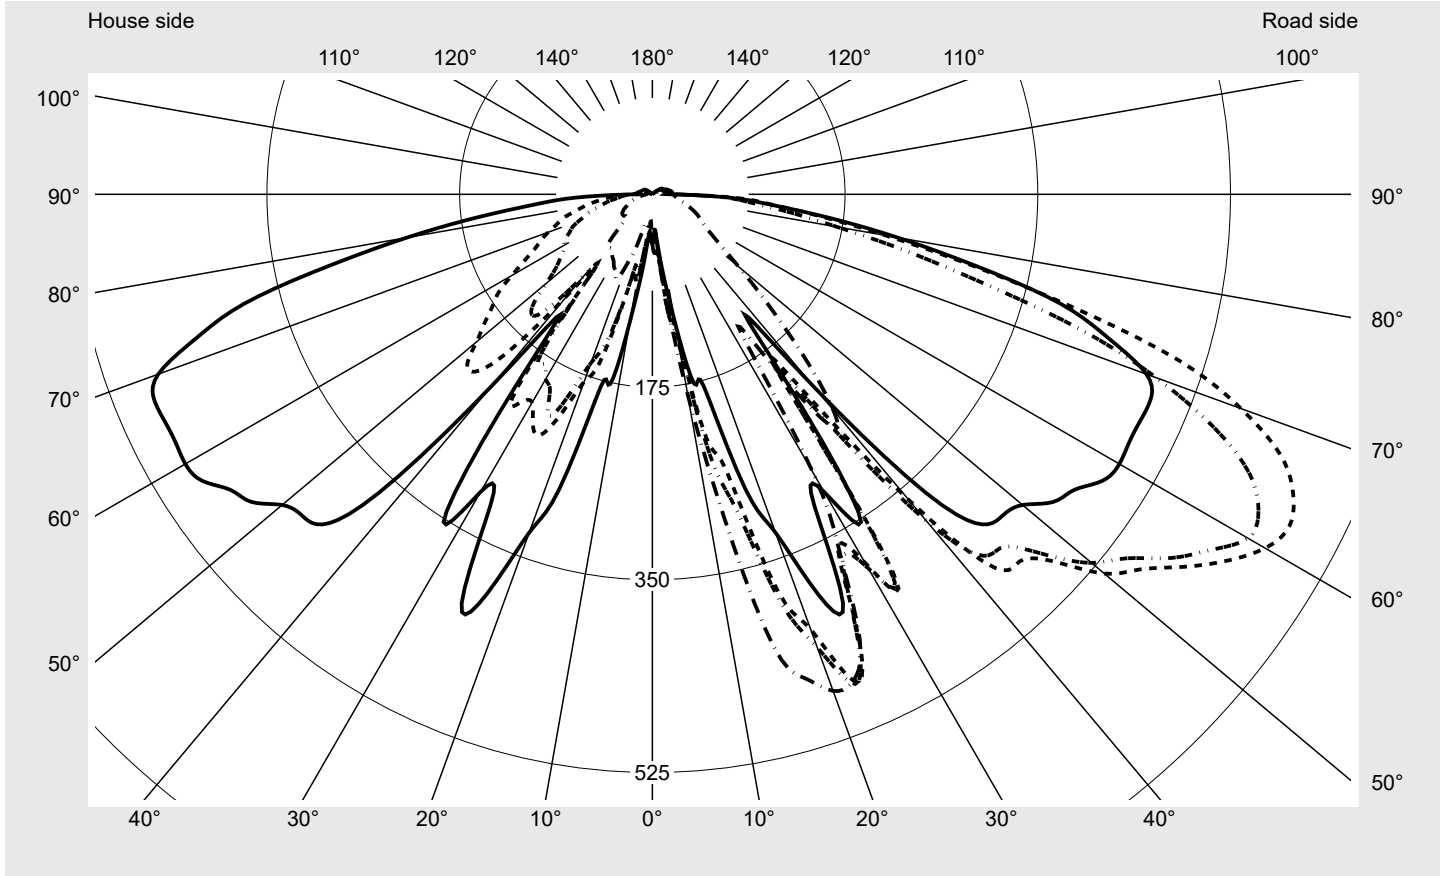

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%

### Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	617.0
Imax 80°	254.1
Imax 90°	21.9
Imax >90°	18.4
Imax >95°	17.8


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
---	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

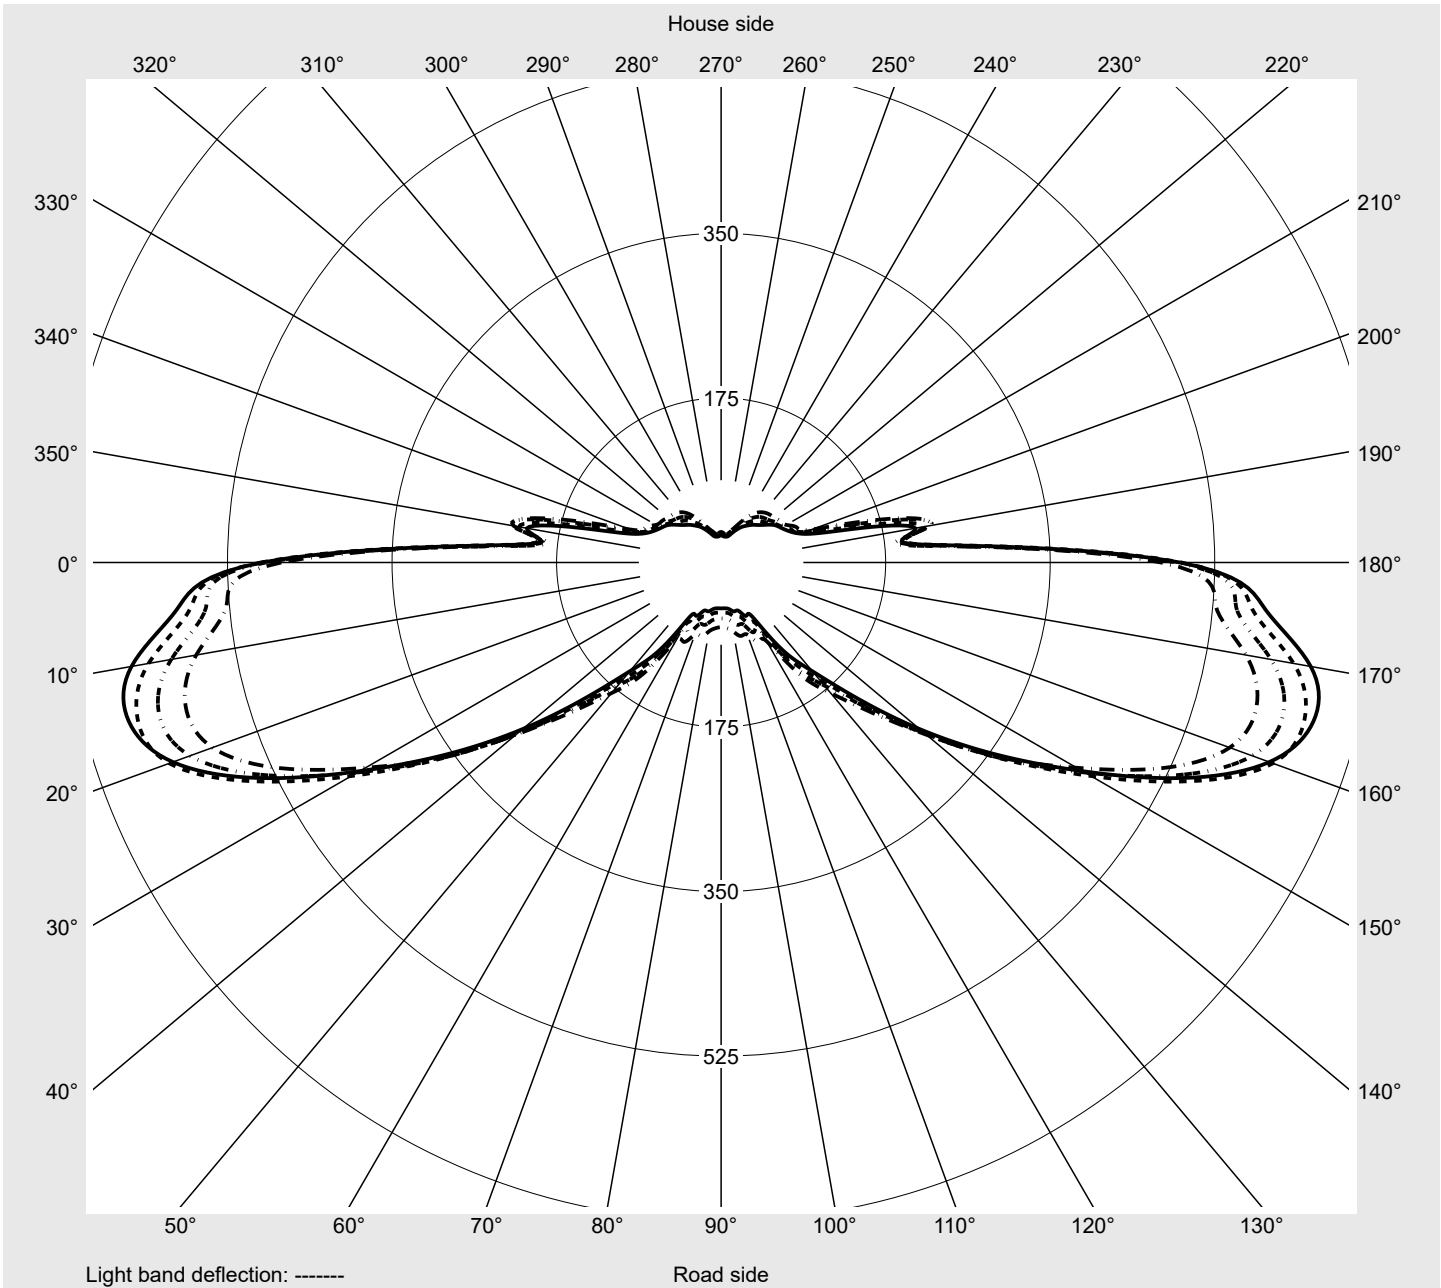

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	37.7	37.7	38.0	38.4	38.8	39.7	40.8	42.5	45.3	48.0	49.8	50.9	51.7
5,0°	36.7	36.8	37.0	37.3	38.1	40.0	42.3	44.4	47.3	49.2	50.3	51.0	50.6
7,5°	69.1	80.4	90.8	99.9	108.1	116.8	123.2	130.2	134.3	134.7	130.0	119.6	101.3
10,0°	117.6	123.7	124.4	128.7	136.5	145.5	153.0	161.9	172.2	183.0	190.4	203.1	215.5
12,5°	176.4	200.2	219.0	226.7	244.0	257.9	273.2	279.5	292.2	300.9	302.3	280.0	283.8
15,0°	180.5	207.1	231.4	260.0	298.3	320.6	322.9	331.1	333.5	371.7	383.2	384.1	359.6
17,5°	280.0	306.9	353.6	376.0	389.2	400.8	392.2	358.7	385.2	398.3	445.0	447.3	436.4
20,0°	326.8	368.6	388.8	420.3	437.9	451.2	454.7	443.3	441.8	446.4	485.3	469.2	455.7
22,5°	392.9	429.8	458.9	478.3	481.3	474.6	462.5	436.0	431.3	435.8	475.1	453.4	442.2
25,0°	409.8	430.1	442.4	442.9	438.8	432.7	414.9	386.3	374.5	380.1	413.5	392.3	383.3
27,5°	318.4	342.8	359.6	365.6	374.3	378.5	359.5	336.5	321.7	323.9	349.2	327.5	314.9
30,0°	312.1	346.8	373.7	386.2	392.1	392.7	374.3	344.7	322.4	315.6	323.6	285.1	257.8
32,5°	352.8	388.5	407.8	406.7	398.3	386.8	352.9	311.0	289.9	288.0	293.7	271.9	253.1
35,0°	243.2	228.2	216.4	205.9	207.5	216.9	215.8	209.9	219.1	237.0	249.0	249.7	242.8
37,5°	138.2	169.3	200.3	224.2	259.1	287.1	292.0	276.4	257.3	258.5	246.8	221.2	209.7
40,0°	228.4	282.2	330.3	362.5	387.4	388.3	364.6	329.4	295.3	280.8	258.4	221.1	199.7
42,5°	367.6	413.3	446.1	459.8	445.3	419.4	383.7	344.2	312.5	285.5	258.1	223.3	191.3
45,0°	424.0	462.2	476.0	471.5	452.4	427.4	395.5	353.7	315.9	287.8	254.4	216.5	177.3
47,5°	431.6	465.2	485.2	493.1	484.4	458.3	414.6	359.6	309.1	275.0	238.2	201.0	153.2
50,0°	438.9	486.3	519.4	535.8	520.7	482.8	428.9	357.5	295.5	255.1	214.3	181.4	132.2
52,5°	458.9	511.6	545.5	559.3	543.0	494.7	429.5	357.9	285.5	236.4	195.0	161.3	110.1
55,0°	467.8	528.1	566.9	589.7	575.7	517.5	436.6	361.1	285.1	225.1	181.3	144.5	96.6
57,5°	484.4	550.0	593.9	619.1	601.1	535.1	446.8	362.8	284.3	217.6	170.8	134.5	83.1
60,0°	489.7	567.0	618.4	642.6	624.5	550.4	454.3	363.6	283.0	212.1	162.1	123.7	76.5
62,5°	488.1	581.6	636.8	652.3	620.5	542.4	443.8	355.5	275.7	203.7	151.0	113.1	66.8
65,0°	488.4	591.7	644.8	642.0	597.8	517.1	422.8	337.0	263.8	193.9	140.2	102.2	61.5
67,5°	489.4	603.2	644.7	617.2	551.2	465.2	373.5	300.0	240.3	179.1	127.6	90.2	53.4
70,0°	477.5	584.5	617.0	568.9	487.0	395.8	316.1	252.7	207.9	160.0	113.0	78.7	47.4
72,5°	434.3	537.5	560.7	501.0	407.3	322.5	252.3	201.0	169.1	135.6	97.1	66.9	40.7
75,0°	383.7	456.2	459.9	393.9	310.0	243.3	190.4	153.3	129.6	109.0	81.1	57.1	36.1
77,5°	301.7	355.3	350.6	295.9	234.0	183.6	144.8	117.8	99.5	84.5	65.2	47.2	30.7
80,0°	226.2	254.1	251.0	215.4	170.3	133.9	108.6	89.0	73.9	63.6	51.7	39.5	27.1
82,5°	160.3	178.4	176.7	155.1	126.4	101.2	84.0	68.8	56.4	48.6	40.5	32.5	23.9
85,0°	107.9	120.8	119.8	109.9	91.7	73.7	61.9	52.7	43.9	37.9	32.9	27.6	21.4
87,5°	70.4	81.0	81.9	77.0	65.7	54.7	47.4	40.9	34.9	30.7	27.2	24.1	19.7
90,0°	17.6	19.2	20.6	21.9	21.9	21.3	20.6	20.0	19.3	18.8	18.2	17.6	16.1
92,5°	13.9	15.3	16.3	17.1	17.4	17.5	17.5	17.1	17.0	16.7	16.5	16.3	15.7
95,0°	13.5	14.8	15.6	16.3	16.7	16.9	17.0	16.7	16.5	16.4	16.2	16.1	15.7
97,5°	13.1	14.3	15.0	15.5	16.1	16.4	16.5	16.3	16.1	15.9	15.8	15.7	15.4
100,0°	12.5	13.4	14.1	14.7	15.1	15.5	15.7	15.5	15.3	15.2	15.2	15.2	14.9
102,5°	11.6	12.4	13.2	13.8	14.2	14.5	14.8	14.7	14.5	14.3	14.3	14.4	14.3
105,0°	11.0	11.7	12.4	12.9	13.4	13.8	14.0	14.0	13.8	13.8	13.8	13.8	13.8
107,5°	10.2	10.9	11.6	12.1	12.7	13.1	13.2	13.1	13.1	13.1	13.2	13.3	13.3
110,0°	9.8	10.4	11.1	11.6	12.1	12.5	12.8	12.6	12.5	12.4	12.5	12.6	12.7
112,5°	9.4	10.0	10.6	11.2	11.6	12.0	12.3	12.1	11.9	11.8	11.9	12.1	12.3

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	52.3	52.7	53.2	53.5	53.5	53.5	37.1	36.7	36.3	35.8	35.2	34.8	34.2
5,0°	50.5	51.1	51.2	52.8	54.0	54.2	36.6	36.4	36.4	36.5	35.9	34.5	33.3
7,5°	92.5	94.8	101.6	95.9	95.4	93.8	58.4	50.7	45.4	40.3	36.7	34.1	32.8
10,0°	197.3	170.2	178.2	188.7	187.8	184.5	111.2	103.2	80.6	75.8	74.9	65.3	52.2
12,5°	274.8	258.2	256.3	290.6	302.6	299.4	123.9	102.8	70.5	62.3	57.3	57.3	70.9
15,0°	349.6	295.1	295.4	373.7	418.1	424.8	145.2	110.1	102.5	99.1	111.4	115.5	119.1
17,5°	438.8	364.9	349.1	422.1	460.5	460.8	210.7	127.9	162.2	143.2	136.2	124.1	108.4
20,0°	457.0	378.0	362.2	440.3	479.8	479.9	237.1	141.7	181.3	163.0	148.6	130.7	113.7
22,5°	444.4	372.2	359.4	437.0	476.9	477.7	330.0	158.1	215.0	196.4	162.3	137.5	120.3
25,0°	396.8	342.9	334.2	406.9	443.4	445.6	315.2	169.9	241.3	222.4	180.9	145.8	125.3
27,5°	333.0	291.9	284.1	342.4	368.5	370.4	246.1	123.0	235.0	201.3	166.8	135.7	122.0
30,0°	251.4	224.6	220.6	260.4	285.7	291.8	221.5	103.7	218.4	193.5	160.7	132.9	118.6
32,5°	224.0	182.5	172.4	177.8	161.0	151.7	251.9	110.6	224.8	182.5	146.1	118.5	107.2
35,0°	206.1	149.1	155.8	187.6	187.9	185.0	205.3	111.4	211.6	175.1	135.4	96.5	78.4
37,5°	187.7	138.3	178.6	241.1	260.0	264.0	105.0	77.7	91.5	90.6	75.1	61.2	53.0
40,0°	190.3	163.9	202.4	247.0	254.7	255.4	154.6	99.0	116.6	94.6	62.7	61.2	66.6
42,5°	183.2	155.3	192.6	215.2	212.5	212.3	240.5	140.2	194.4	141.3	85.4	85.5	86.8
45,0°	165.1	146.5	168.5	175.0	169.0	166.9	261.6	174.9	227.7	154.6	97.5	98.3	94.4
47,5°	146.1	126.1	143.6	140.9	133.6	130.9	247.8	200.2	228.0	145.8	98.9	98.7	94.0
50,0°	124.3	109.3	117.4	111.3	104.7	102.4	225.7	213.2	208.5	125.7	93.6	91.2	87.8
52,5°	107.6	93.6	96.9	89.7	84.2	82.2	217.4	223.9	192.0	110.8	90.8	84.0	81.2
55,0°	93.2	81.6	80.9	74.5	70.2	68.8	211.9	223.9	177.2	102.4	88.6	80.0	76.9
57,5°	81.9	70.5	68.7	63.5	60.3	59.5	205.1	225.9	165.5	95.8	86.1	77.6	73.5
60,0°	71.4	62.1	60.0	55.6	53.6	53.3	219.0	218.1	147.4	91.9	82.6	75.6	71.1
62,5°	62.7	54.9	53.8	50.5	48.9	48.8	217.4	209.7	131.3	89.7	79.2	73.7	69.3
65,0°	54.7	49.1	48.2	46.2	45.7	45.8	221.0	193.8	118.2	83.4	71.8	69.3	65.7
67,5°	48.2	44.1	43.2	41.7	41.4	41.7	219.9	180.9	109.6	78.8	66.5	63.5	59.1
70,0°	41.6	39.0	38.6	37.6	37.4	37.5	215.6	164.8	100.5	71.2	61.2	58.7	54.4
72,5°	36.2	34.3	33.7	33.0	33.0	33.2	198.6	152.8	91.2	63.6	53.8	51.9	48.0
75,0°	31.7	30.5	30.0	29.3	29.1	29.3	174.4	138.6	84.0	57.2	48.8	46.5	42.9
77,5°	27.3	26.8	26.3	25.8	25.8	26.0	143.9	119.8	72.5	48.1	41.6	39.7	37.2
80,0°	24.1	24.0	23.6	23.4	23.5	23.6	106.5	102.7	62.9	42.5	37.7	35.1	33.8
82,5°	21.9	22.0	21.8	21.7	21.8	21.9	82.1	84.1	52.7	35.6	31.6	30.1	27.8
85,0°	20.5	20.7	20.6	20.6	20.6	20.7	63.6	62.3	42.1	29.8	26.4	24.8	22.7
87,5°	19.6	19.9	19.8	19.8	19.9	19.9	48.0	47.3	33.4	24.7	22.1	21.0	19.2
90,0°	16.9	17.5	17.8	18.2	18.4	18.6	15.0	14.2	13.1	12.3	11.7	11.1	10.7
92,5°	16.3	17.0	17.5	17.8	18.1	18.4	13.0	12.7	12.2	11.7	11.3	10.9	10.3
95,0°	16.3	16.6	17.2	17.6	17.9	18.2	12.7	12.5	12.0	11.5	11.2	11.0	10.4
97,5°	16.0	16.4	16.6	17.2	17.6	17.8	12.4	12.1	11.7	11.2	11.0	10.8	10.4
100,0°	15.4	15.8	16.0	16.3	16.9	17.2	11.8	11.4	11.0	10.6	10.5	10.4	10.0
102,5°	14.7	15.1	15.4	15.6	16.0	16.1	11.0	10.5	10.1	9.9	9.7	9.6	9.2
105,0°	14.2	14.5	14.8	14.9	15.2	14.9	10.4	9.9	9.6	9.3	9.1	9.0	8.7
107,5°	13.5	13.9	14.1	14.3	14.5	14.0	9.7	9.2	8.9	8.5	8.4	8.3	8.0
110,0°	13.0	13.2	13.5	13.8	13.9	13.1	9.3	8.8	8.3	8.1	7.9	7.8	7.5
112,5°	12.5	12.8	13.1	13.3	12.3	7.7	8.9	8.4	8.0	7.7	7.5	7.6	7.2

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	0.1	0.1
2,5°	33.7	33.1	32.7	32.2	31.6	31.0	30.1	29.0	27.5	26.3	25.8	0.5	0.5
5,0°	32.6	32.2	32.8	32.2	31.4	30.6	30.0	29.2	28.6	28.0	28.0	0.9	1.5
7,5°	32.8	32.1	31.0	30.1	30.4	30.2	29.9	29.4	28.8	28.6	28.6	2.6	4.0
10,0°	38.1	32.6	31.4	30.7	29.8	29.4	29.1	28.3	27.5	26.8	26.4	5.2	9.3
12,5°	79.7	75.1	67.7	57.7	47.1	36.5	31.4	28.9	27.6	26.6	26.1	9.7	19.0
15,0°	90.5	78.0	73.4	74.9	71.5	59.0	51.3	39.1	38.2	36.7	34.6	14.5	33.5
17,5°	102.7	92.7	82.5	73.4	62.7	59.5	61.4	54.0	47.1	54.6	54.0	20.5	54.0
20,0°	107.3	93.4	83.2	79.6	75.2	71.3	72.1	60.8	55.1	64.6	67.8	25.7	79.7
22,5°	109.1	95.8	81.4	79.1	79.5	76.6	75.1	71.2	64.7	77.2	83.0	30.2	109.9
25,0°	106.4	90.4	79.2	78.2	82.1	84.7	84.6	74.8	67.3	74.1	77.9	31.4	141.3
27,5°	102.7	89.5	79.4	79.7	83.3	83.2	81.6	73.8	63.4	69.1	75.1	29.4	170.6
30,0°	102.8	86.8	79.2	81.2	84.7	83.3	79.2	71.5	57.8	65.5	70.3	29.7	200.3
32,5°	99.2	98.0	85.7	78.8	76.8	75.7	72.3	67.6	55.5	62.8	67.5	30.0	230.3
35,0°	78.7	84.1	83.2	78.8	77.7	75.1	70.8	65.5	55.0	59.3	63.6	24.9	255.2
37,5°	47.0	51.5	62.1	73.7	76.8	73.4	69.9	63.5	55.4	56.9	61.8	25.0	280.2
40,0°	51.1	38.7	34.5	47.4	62.0	65.2	64.6	60.1	54.4	56.8	62.8	31.0	311.2
42,5°	75.5	60.7	43.6	36.4	37.2	44.8	52.7	53.3	49.6	50.9	56.4	36.6	347.9
45,0°	88.1	79.3	63.5	48.0	39.8	36.9	36.7	37.1	38.0	38.6	41.2	39.1	386.9
47,5°	90.7	84.9	76.7	61.7	50.9	41.6	34.7	31.4	30.0	32.2	34.1	40.4	427.3
50,0°	86.6	83.3	78.6	68.2	55.0	44.4	37.8	34.0	29.5	29.6	31.2	41.3	468.6
52,5°	80.4	78.9	75.9	69.0	56.4	45.7	37.6	32.4	29.5	30.3	32.2	42.0	510.6
55,0°	74.1	72.4	69.6	64.3	55.5	46.0	38.5	34.0	30.7	31.3	32.7	43.1	553.7
57,5°	69.1	66.2	63.3	58.0	51.6	44.4	37.4	32.8	29.7	31.2	32.5	44.2	597.9
60,0°	65.7	61.7	58.2	52.9	47.1	40.9	35.2	31.1	28.5	30.1	30.8	45.3	643.2
62,5°	62.4	56.4	52.3	47.9	43.6	38.4	33.1	29.0	27.9	27.9	28.9	45.5	688.6
65,0°	58.6	51.7	47.0	42.8	39.5	35.5	30.7	27.1	26.5	25.8	26.1	44.8	733.4
67,5°	53.5	47.7	42.5	38.5	35.8	32.4	28.2	24.6	25.4	23.6	24.1	43.0	776.5
70,0°	48.5	42.4	37.7	34.2	32.2	29.2	25.3	22.8	23.3	21.7	21.8	39.9	816.4
72,5°	42.8	37.8	33.7	30.5	28.5	25.9	22.1	20.4	20.9	19.4	19.6	35.3	851.7
75,0°	37.5	32.9	29.4	26.3	24.9	22.8	19.4	18.9	18.6	17.2	17.2	29.6	881.2
77,5°	33.2	29.0	26.0	23.4	21.9	19.8	16.4	16.6	16.0	14.9	14.8	23.7	904.9
80,0°	29.4	25.3	22.4	20.3	18.6	16.7	13.8	14.2	13.4	12.5	12.1	18.4	923.3
82,5°	24.4	21.3	19.5	17.8	16.2	14.3	11.6	12.1	11.2	10.2	9.9	14.2	937.5
85,0°	20.5	18.1	16.3	14.8	13.5	12.0	9.7	10.0	9.1	8.5	8.1	10.8	948.3
87,5°	17.2	15.2	13.5	12.6	11.1	9.9	8.3	8.4	7.7	7.1	6.7	8.3	956.6
90,0°	10.2	9.6	9.1	8.6	7.9	7.0	6.4	6.3	6.0	5.6	5.3	3.9	960.5
92,5°	9.7	9.1	8.4	7.8	7.3	6.5	6.1	6.1	5.9	5.6	5.6	3.6	964.1
95,0°	9.8	9.2	8.5	8.2	7.6	6.9	6.3	6.4	6.1	6.0	5.9	3.5	967.6
97,5°	9.7	9.0	8.6	8.2	7.7	7.0	6.6	6.2	6.2	6.1	6.0	3.4	971.0
100,0°	9.3	8.9	8.5	8.1	7.6	6.9	6.6	6.3	6.0	6.1	6.0	3.3	974.3
102,5°	8.7	8.3	7.9	7.5	7.0	6.6	6.1	6.0	5.6	5.5	5.6	3.0	977.3
105,0°	8.3	7.8	7.4	7.0	6.6	6.1	5.6	5.5	5.2	4.8	4.9	2.8	980.2
107,5°	7.5	7.2	6.8	6.4	6.0	5.5	5.1	4.9	4.5	4.2	4.3	2.6	982.8
110,0°	7.1	6.7	6.3	5.9	5.5	4.9	4.5	4.4	4.1	3.9	3.5	2.4	985.2
112,5°	6.8	6.3	5.9	5.6	5.2	4.8	4.4	4.1	4.0	3.3	2.4	2.3	987.5

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	9.2	9.7	10.3	10.7	11.2	11.5	11.8	11.6	11.4	11.4	11.5	11.7	11.9
117,5°	8.7	9.3	9.8	10.3	10.7	11.1	11.3	11.1	10.9	10.9	11.1	11.3	11.5
120,0°	8.5	9.0	9.5	9.9	10.2	10.6	10.7	10.5	10.4	10.4	10.7	10.9	11.1
122,5°	8.0	8.6	9.1	9.4	9.7	10.1	10.3	10.0	9.9	10.0	10.3	10.4	10.6
125,0°	6.4	6.8	7.1	7.4	7.6	7.9	8.0	7.8	7.8	7.8	8.0	8.1	8.3
127,5°	4.5	4.7	4.9	5.0	5.1	5.3	5.3	5.3	5.2	5.2	5.2	5.3	5.4
130,0°	3.4	3.5	3.6	3.6	3.6	3.6	3.5	3.5	3.5	3.5	3.5	3.6	3.6
132,5°	2.9	3.1	3.1	3.1	3.1	3.1	3.1	3.0	3.0	3.0	3.0	3.0	3.0
135,0°	2.5	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.4	2.4	2.4	2.5	2.5
137,5°	2.0	2.1	2.1	2.1	2.1	2.1	2.0	2.0	2.0	1.9	1.9	1.9	1.9
140,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.3	1.3
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9
145,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.6	0.6
147,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	12.1	12.4	12.6	12.8	10.5	4.6	8.7	8.1	7.7	7.4	7.3	7.3	7.0
117,5°	11.7	11.9	12.1	12.3	9.2	4.3	8.3	7.8	7.3	7.0	6.9	7.0	6.7
120,0°	11.2	11.4	11.6	11.7	7.8	3.4	8.0	7.5	7.1	6.7	6.7	6.8	6.4
122,5°	10.8	11.0	11.1	11.2	6.9	3.0	7.6	7.2	6.8	6.4	6.2	6.4	6.1
125,0°	8.5	8.7	8.8	8.7	5.4	2.7	6.0	5.6	5.3	5.1	4.9	5.0	4.8
127,5°	5.5	5.6	5.6	5.6	3.5	1.9	4.2	4.0	3.8	3.7	3.6	3.5	3.5
130,0°	3.7	3.7	3.7	3.4	2.3	1.5	3.2	3.1	3.0	3.0	2.8	2.7	2.8
132,5°	3.1	3.1	3.1	2.7	1.9	1.3	2.8	2.7	2.6	2.6	2.5	2.5	2.5
135,0°	2.5	2.5	2.5	2.1	1.6	1.2	2.4	2.4	2.3	2.2	2.1	2.1	2.1
137,5°	1.9	1.9	1.9	1.6	1.1	1.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8
140,0°	1.3	1.3	1.3	1.1	0.9	0.8	1.5	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.9	0.9	0.8	0.8	0.6	0.6	1.0	1.0	1.1	1.1	1.1	1.1	1.1
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	1.0	1.0
147,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.6	6.1	5.8	5.4	5.1	4.7	4.3	4.0	3.8	3.1	1.9	2.1	989.6
117,5°	6.2	5.9	5.5	5.2	4.8	4.5	4.1	3.8	3.5	2.7	1.9	2.0	991.6
120,0°	6.1	5.7	5.4	5.1	4.8	4.4	4.1	3.8	3.4	2.4	1.8	1.9	993.5
122,5°	5.8	5.4	5.1	4.8	4.6	4.2	3.9	3.6	3.2	2.3	1.7	1.7	995.2
125,0°	4.5	4.2	4.0	3.8	3.6	3.3	3.1	2.9	2.5	1.9	1.6	1.3	996.6
127,5°	3.3	3.2	3.1	2.8	2.7	2.6	2.5	2.3	2.0	1.6	1.4	0.9	997.4
130,0°	2.7	2.6	2.6	2.5	2.4	2.3	2.1	2.0	1.7	1.5	1.4	0.6	998.1
132,5°	2.4	2.4	2.3	2.3	2.2	2.1	2.0	1.9	1.6	1.5	1.3	0.5	998.6
135,0°	2.1	2.1	2.0	2.0	1.9	1.8	1.8	1.7	1.5	1.3	1.2	0.4	999.0
137,5°	1.8	1.7	1.7	1.7	1.6	1.5	1.5	1.4	1.3	1.2	1.1	0.3	999.3
140,0°	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.1	1.0	1.0	0.2	999.6
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.7
145,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	999.9
147,5°	0.9	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245FF14H + 5XA54000XS</b> <b>EAN: 4058352635858 + 4050737730073</b>	<b>LP number</b> <b>59286_18</b>
---	---	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1280	10.5	10.8	10.6
95	241	252	1214	10.0	10.3	10.2
90	229	250	1154	9.4	9.8	9.6
85	216	248	1089	8.9	9.2	9.0
80	203	246	1023	8.3	8.7	8.5
75	190	243	957	7.8	8.1	8.0
70	178	241	897	7.3	7.6	7.4
65	165	238	831	6.9	7.1	7.0
60	152	235	766	6.4	6.6	6.5
55	140	232	706	5.9	6.1	6.0
50	127	229	640	5.4	5.6	5.5
45	114	225	574	5.0	5.2	5.1
40	102	221	514	4.6	4.7	4.6
35	89	216	449	4.1	4.3	4.2
30	76	210	383	3.7	3.8	3.8
28	72	208	363	3.5	3.7	3.6