




# Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, amber <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 950 lm Power consumption = 10.0 W Luminous efficacy = 95 lm/W	<b>serial documentation</b> <b>08.07.2022</b>
		



**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 652 cd/klm**

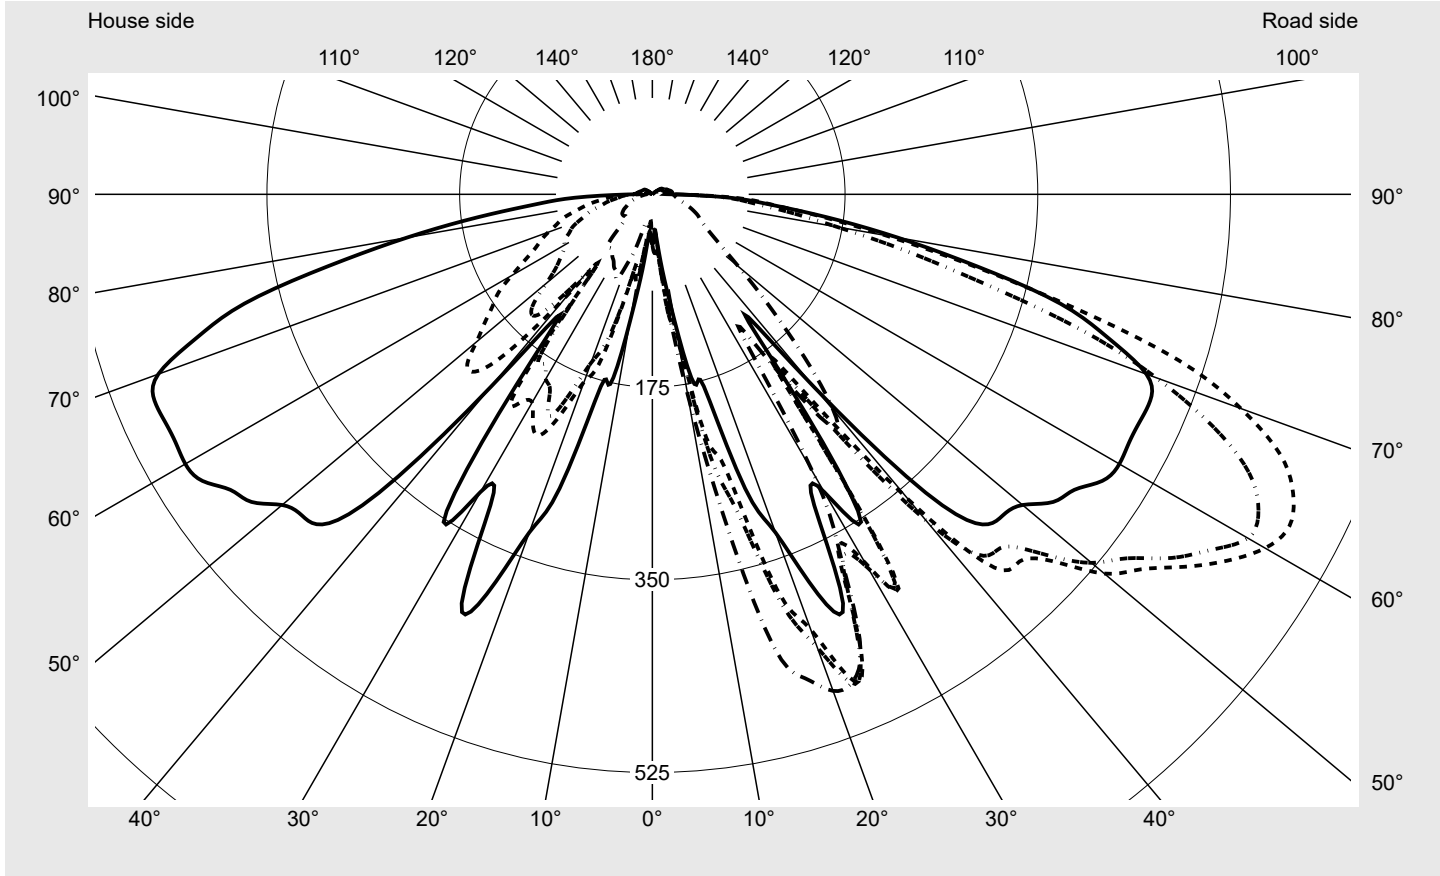

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%

**Luminous intensity class acc. to EN13201-2**

Class:	---
Imax 70°	617.0
Imax 80°	254.1
Imax 90°	21.9
Imax >90°	18.4
Imax >95°	17.8


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
---	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

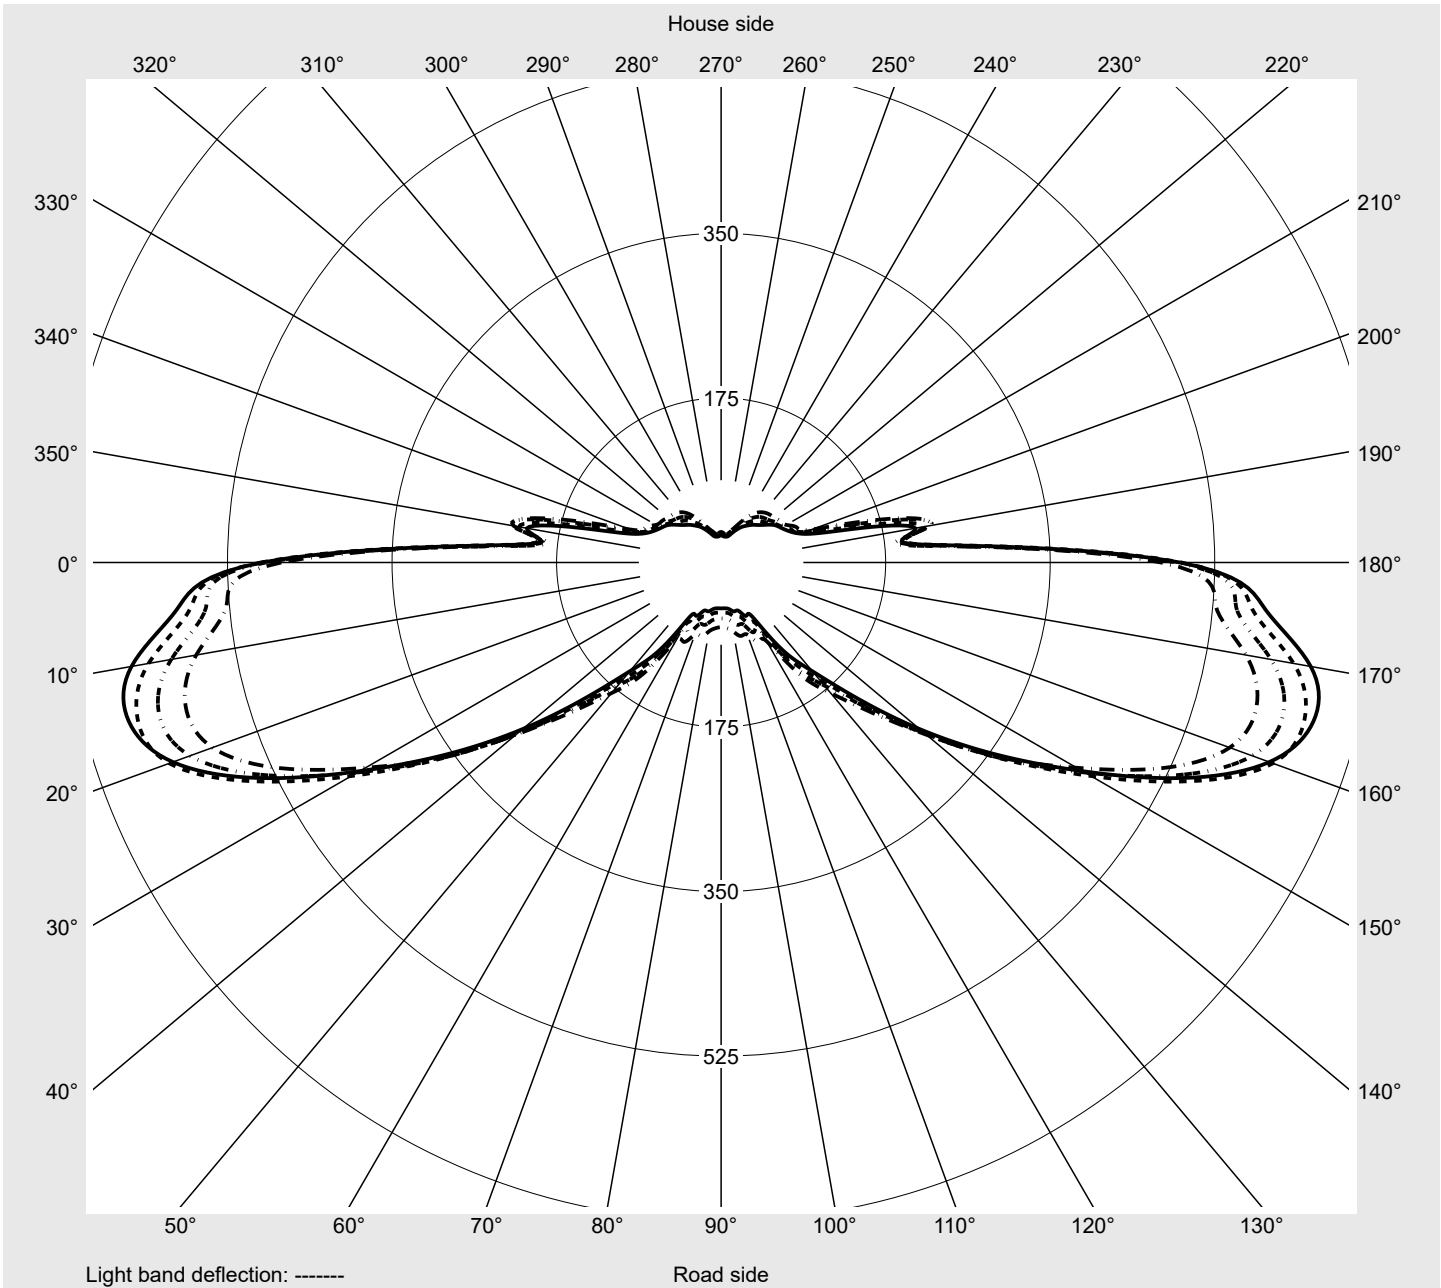

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	37.7	37.7	38.0	38.4	38.8	39.7	40.8	42.5	45.3	48.0	49.8	50.9	51.7
5,0°	36.7	36.8	37.0	37.3	38.1	40.0	42.3	44.4	47.3	49.2	50.3	51.0	50.6
7,5°	69.1	80.4	90.8	99.9	108.1	116.8	123.2	130.2	134.3	134.7	130.0	119.6	101.3
10,0°	117.6	123.7	124.4	128.7	136.5	145.5	153.0	161.9	172.2	183.0	190.4	203.1	215.5
12,5°	176.4	200.2	219.0	226.7	244.0	257.9	273.2	279.5	292.2	300.9	302.3	280.0	283.8
15,0°	180.5	207.1	231.4	260.0	298.3	320.6	322.9	331.1	333.5	371.7	383.2	384.1	359.6
17,5°	280.0	306.9	353.6	376.0	389.2	400.8	392.2	358.7	385.2	398.3	445.0	447.3	436.4
20,0°	326.8	368.6	388.8	420.3	437.9	451.2	454.7	443.3	441.8	446.4	485.3	469.2	455.7
22,5°	392.9	429.8	458.9	478.3	481.3	474.6	462.5	436.0	431.3	435.8	475.1	453.4	442.2
25,0°	409.8	430.1	442.4	442.9	438.8	432.7	414.9	386.3	374.5	380.1	413.5	392.3	383.3
27,5°	318.4	342.8	359.6	365.6	374.3	378.5	359.5	336.5	321.7	323.9	349.2	327.5	314.9
30,0°	312.1	346.8	373.7	386.2	392.1	392.7	374.3	344.7	322.4	315.6	323.6	285.1	257.8
32,5°	352.8	388.5	407.8	406.7	398.3	386.8	352.9	311.0	289.9	288.0	293.7	271.9	253.1
35,0°	243.2	228.2	216.4	205.9	207.5	216.9	215.8	209.9	219.1	237.0	249.0	249.7	242.8
37,5°	138.2	169.3	200.3	224.2	259.1	287.1	292.0	276.4	257.3	258.5	246.8	221.2	209.7
40,0°	228.4	282.2	330.3	362.5	387.4	388.3	364.6	329.4	295.3	280.8	258.4	221.1	199.7
42,5°	367.6	413.3	446.1	459.8	445.3	419.4	383.7	344.2	312.5	285.5	258.1	223.3	191.3
45,0°	424.0	462.2	476.0	471.5	452.4	427.4	395.5	353.7	315.9	287.8	254.4	216.5	177.3
47,5°	431.6	465.2	485.2	493.1	484.4	458.3	414.6	359.6	309.1	275.0	238.2	201.0	153.2
50,0°	438.9	486.3	519.4	535.8	520.7	482.8	428.9	357.5	295.5	255.1	214.3	181.4	132.2
52,5°	458.9	511.6	545.5	559.3	543.0	494.7	429.5	357.9	285.5	236.4	195.0	161.3	110.1
55,0°	467.8	528.1	566.9	589.7	575.7	517.5	436.6	361.1	285.1	225.1	181.3	144.5	96.6
57,5°	484.4	550.0	593.9	619.1	601.1	535.1	446.8	362.8	284.3	217.6	170.8	134.5	83.1
60,0°	489.7	567.0	618.4	642.6	624.5	550.4	454.3	363.6	283.0	212.1	162.1	123.7	76.5
62,5°	488.1	581.6	636.8	652.3	620.5	542.4	443.8	355.5	275.7	203.7	151.0	113.1	66.8
65,0°	488.4	591.7	644.8	642.0	597.8	517.1	422.8	337.0	263.8	193.9	140.2	102.2	61.5
67,5°	489.4	603.2	644.7	617.2	551.2	465.2	373.5	300.0	240.3	179.1	127.6	90.2	53.4
70,0°	477.5	584.5	617.0	568.9	487.0	395.8	316.1	252.7	207.9	160.0	113.0	78.7	47.4
72,5°	434.3	537.5	560.7	501.0	407.3	322.5	252.3	201.0	169.1	135.6	97.1	66.9	40.7
75,0°	383.7	456.2	459.9	393.9	310.0	243.3	190.4	153.3	129.6	109.0	81.1	57.1	36.1
77,5°	301.7	355.3	350.6	295.9	234.0	183.6	144.8	117.8	99.5	84.5	65.2	47.2	30.7
80,0°	226.2	254.1	251.0	215.4	170.3	133.9	108.6	89.0	73.9	63.6	51.7	39.5	27.1
82,5°	160.3	178.4	176.7	155.1	126.4	101.2	84.0	68.8	56.4	48.6	40.5	32.5	23.9
85,0°	107.9	120.8	119.8	109.9	91.7	73.7	61.9	52.7	43.9	37.9	32.9	27.6	21.4
87,5°	70.4	81.0	81.9	77.0	65.7	54.7	47.4	40.9	34.9	30.7	27.2	24.1	19.7
90,0°	17.6	19.2	20.6	21.9	21.9	21.3	20.6	20.0	19.3	18.8	18.2	17.6	16.1
92,5°	13.9	15.3	16.3	17.1	17.4	17.5	17.5	17.1	17.0	16.7	16.5	16.3	15.7
95,0°	13.5	14.8	15.6	16.3	16.7	16.9	17.0	16.7	16.5	16.4	16.2	16.1	15.7
97,5°	13.1	14.3	15.0	15.5	16.1	16.4	16.5	16.3	16.1	15.9	15.8	15.7	15.4
100,0°	12.5	13.4	14.1	14.7	15.1	15.5	15.7	15.5	15.3	15.2	15.2	15.2	14.9
102,5°	11.6	12.4	13.2	13.8	14.2	14.5	14.8	14.7	14.5	14.3	14.3	14.4	14.3
105,0°	11.0	11.7	12.4	12.9	13.4	13.8	14.0	14.0	13.8	13.8	13.8	13.8	13.8
107,5°	10.2	10.9	11.6	12.1	12.7	13.1	13.2	13.1	13.1	13.1	13.2	13.3	13.3
110,0°	9.8	10.4	11.1	11.6	12.1	12.5	12.8	12.6	12.5	12.4	12.5	12.6	12.7
112,5°	9.4	10.0	10.6	11.2	11.6	12.0	12.3	12.1	11.9	11.8	11.9	12.1	12.3

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2
2,5°	52.3	52.7	53.2	53.5	53.5	53.5	37.1	36.7	36.3	35.8	35.2	34.8	34.2
5,0°	50.5	51.1	51.2	52.8	54.0	54.2	36.6	36.4	36.4	36.5	35.9	34.5	33.3
7,5°	92.5	94.8	101.6	95.9	95.4	93.8	58.4	50.7	45.4	40.3	36.7	34.1	32.8
10,0°	197.3	170.2	178.2	188.7	187.8	184.5	111.2	103.2	80.6	75.8	74.9	65.3	52.2
12,5°	274.8	258.2	256.3	290.6	302.6	299.4	123.9	102.8	70.5	62.3	57.3	57.3	70.9
15,0°	349.6	295.1	295.4	373.7	418.1	424.8	145.2	110.1	102.5	99.1	111.4	115.5	119.1
17,5°	438.8	364.9	349.1	422.1	460.5	460.8	210.7	127.9	162.2	143.2	136.2	124.1	108.4
20,0°	457.0	378.0	362.2	440.3	479.8	479.9	237.1	141.7	181.3	163.0	148.6	130.7	113.7
22,5°	444.4	372.2	359.4	437.0	476.9	477.7	330.0	158.1	215.0	196.4	162.3	137.5	120.3
25,0°	396.8	342.9	334.2	406.9	443.4	445.6	315.2	169.9	241.3	222.4	180.9	145.8	125.3
27,5°	333.0	291.9	284.1	342.4	368.5	370.4	246.1	123.0	235.0	201.3	166.8	135.7	122.0
30,0°	251.4	224.6	220.6	260.4	285.7	291.8	221.5	103.7	218.4	193.5	160.7	132.9	118.6
32,5°	224.0	182.5	172.4	177.8	161.0	151.7	251.9	110.6	224.8	182.5	146.1	118.5	107.2
35,0°	206.1	149.1	155.8	187.6	187.9	185.0	205.3	111.4	211.6	175.1	135.4	96.5	78.4
37,5°	187.7	138.3	178.6	241.1	260.0	264.0	105.0	77.7	91.5	90.6	75.1	61.2	53.0
40,0°	190.3	163.9	202.4	247.0	254.7	255.4	154.6	99.0	116.6	94.6	62.7	61.2	66.6
42,5°	183.2	155.3	192.6	215.2	212.5	212.3	240.5	140.2	194.4	141.3	85.4	85.5	86.8
45,0°	165.1	146.5	168.5	175.0	169.0	166.9	261.6	174.9	227.7	154.6	97.5	98.3	94.4
47,5°	146.1	126.1	143.6	140.9	133.6	130.9	247.8	200.2	228.0	145.8	98.9	98.7	94.0
50,0°	124.3	109.3	117.4	111.3	104.7	102.4	225.7	213.2	208.5	125.7	93.6	91.2	87.8
52,5°	107.6	93.6	96.9	89.7	84.2	82.2	217.4	223.9	192.0	110.8	90.8	84.0	81.2
55,0°	93.2	81.6	80.9	74.5	70.2	68.8	211.9	223.9	177.2	102.4	88.6	80.0	76.9
57,5°	81.9	70.5	68.7	63.5	60.3	59.5	205.1	225.9	165.5	95.8	86.1	77.6	73.5
60,0°	71.4	62.1	60.0	55.6	53.6	53.3	219.0	218.1	147.4	91.9	82.6	75.6	71.1
62,5°	62.7	54.9	53.8	50.5	48.9	48.8	217.4	209.7	131.3	89.7	79.2	73.7	69.3
65,0°	54.7	49.1	48.2	46.2	45.7	45.8	221.0	193.8	118.2	83.4	71.8	69.3	65.7
67,5°	48.2	44.1	43.2	41.7	41.4	41.7	219.9	180.9	109.6	78.8	66.5	63.5	59.1
70,0°	41.6	39.0	38.6	37.6	37.4	37.5	215.6	164.8	100.5	71.2	61.2	58.7	54.4
72,5°	36.2	34.3	33.7	33.0	33.0	33.2	198.6	152.8	91.2	63.6	53.8	51.9	48.0
75,0°	31.7	30.5	30.0	29.3	29.1	29.3	174.4	138.6	84.0	57.2	48.8	46.5	42.9
77,5°	27.3	26.8	26.3	25.8	25.8	26.0	143.9	119.8	72.5	48.1	41.6	39.7	37.2
80,0°	24.1	24.0	23.6	23.4	23.5	23.6	106.5	102.7	62.9	42.5	37.7	35.1	33.8
82,5°	21.9	22.0	21.8	21.7	21.8	21.9	82.1	84.1	52.7	35.6	31.6	30.1	27.8
85,0°	20.5	20.7	20.6	20.6	20.6	20.7	63.6	62.3	42.1	29.8	26.4	24.8	22.7
87,5°	19.6	19.9	19.8	19.8	19.9	19.9	48.0	47.3	33.4	24.7	22.1	21.0	19.2
90,0°	16.9	17.5	17.8	18.2	18.4	18.6	15.0	14.2	13.1	12.3	11.7	11.1	10.7
92,5°	16.3	17.0	17.5	17.8	18.1	18.4	13.0	12.7	12.2	11.7	11.3	10.9	10.3
95,0°	16.3	16.6	17.2	17.6	17.9	18.2	12.7	12.5	12.0	11.5	11.2	11.0	10.4
97,5°	16.0	16.4	16.6	17.2	17.6	17.8	12.4	12.1	11.7	11.2	11.0	10.8	10.4
100,0°	15.4	15.8	16.0	16.3	16.9	17.2	11.8	11.4	11.0	10.6	10.5	10.4	10.0
102,5°	14.7	15.1	15.4	15.6	16.0	16.1	11.0	10.5	10.1	9.9	9.7	9.6	9.2
105,0°	14.2	14.5	14.8	14.9	15.2	14.9	10.4	9.9	9.6	9.3	9.1	9.0	8.7
107,5°	13.5	13.9	14.1	14.3	14.5	14.0	9.7	9.2	8.9	8.5	8.4	8.3	8.0
110,0°	13.0	13.2	13.5	13.8	13.9	13.1	9.3	8.8	8.3	8.1	7.9	7.8	7.5
112,5°	12.5	12.8	13.1	13.3	12.3	7.7	8.9	8.4	8.0	7.7	7.5	7.6	7.2

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	45.2	0.1	0.1
2,5°	33.7	33.1	32.7	32.2	31.6	31.0	30.1	29.0	27.5	26.3	25.8	0.5	0.5
5,0°	32.6	32.2	32.8	32.2	31.4	30.6	30.0	29.2	28.6	28.0	28.0	0.9	1.5
7,5°	32.8	32.1	31.0	30.1	30.4	30.2	29.9	29.4	28.8	28.6	28.6	2.6	4.0
10,0°	38.1	32.6	31.4	30.7	29.8	29.4	29.1	28.3	27.5	26.8	26.4	5.2	9.3
12,5°	79.7	75.1	67.7	57.7	47.1	36.5	31.4	28.9	27.6	26.6	26.1	9.7	19.0
15,0°	90.5	78.0	73.4	74.9	71.5	59.0	51.3	39.1	38.2	36.7	34.6	14.5	33.5
17,5°	102.7	92.7	82.5	73.4	62.7	59.5	61.4	54.0	47.1	54.6	54.0	20.5	54.0
20,0°	107.3	93.4	83.2	79.6	75.2	71.3	72.1	60.8	55.1	64.6	67.8	25.7	79.7
22,5°	109.1	95.8	81.4	79.1	79.5	76.6	75.1	71.2	64.7	77.2	83.0	30.2	109.9
25,0°	106.4	90.4	79.2	78.2	82.1	84.7	84.6	74.8	67.3	74.1	77.9	31.4	141.3
27,5°	102.7	89.5	79.4	79.7	83.3	83.2	81.6	73.8	63.4	69.1	75.1	29.4	170.6
30,0°	102.8	86.8	79.2	81.2	84.7	83.3	79.2	71.5	57.8	65.5	70.3	29.7	200.3
32,5°	99.2	98.0	85.7	78.8	76.8	75.7	72.3	67.6	55.5	62.8	67.5	30.0	230.3
35,0°	78.7	84.1	83.2	78.8	77.7	75.1	70.8	65.5	55.0	59.3	63.6	24.9	255.2
37,5°	47.0	51.5	62.1	73.7	76.8	73.4	69.9	63.5	55.4	56.9	61.8	25.0	280.2
40,0°	51.1	38.7	34.5	47.4	62.0	65.2	64.6	60.1	54.4	56.8	62.8	31.0	311.2
42,5°	75.5	60.7	43.6	36.4	37.2	44.8	52.7	53.3	49.6	50.9	56.4	36.6	347.9
45,0°	88.1	79.3	63.5	48.0	39.8	36.9	36.7	37.1	38.0	38.6	41.2	39.1	386.9
47,5°	90.7	84.9	76.7	61.7	50.9	41.6	34.7	31.4	30.0	32.2	34.1	40.4	427.3
50,0°	86.6	83.3	78.6	68.2	55.0	44.4	37.8	34.0	29.5	29.6	31.2	41.3	468.6
52,5°	80.4	78.9	75.9	69.0	56.4	45.7	37.6	32.4	29.5	30.3	32.2	42.0	510.6
55,0°	74.1	72.4	69.6	64.3	55.5	46.0	38.5	34.0	30.7	31.3	32.7	43.1	553.7
57,5°	69.1	66.2	63.3	58.0	51.6	44.4	37.4	32.8	29.7	31.2	32.5	44.2	597.9
60,0°	65.7	61.7	58.2	52.9	47.1	40.9	35.2	31.1	28.5	30.1	30.8	45.3	643.2
62,5°	62.4	56.4	52.3	47.9	43.6	38.4	33.1	29.0	27.9	27.9	28.9	45.5	688.6
65,0°	58.6	51.7	47.0	42.8	39.5	35.5	30.7	27.1	26.5	25.8	26.1	44.8	733.4
67,5°	53.5	47.7	42.5	38.5	35.8	32.4	28.2	24.6	25.4	23.6	24.1	43.0	776.5
70,0°	48.5	42.4	37.7	34.2	32.2	29.2	25.3	22.8	23.3	21.7	21.8	39.9	816.4
72,5°	42.8	37.8	33.7	30.5	28.5	25.9	22.1	20.4	20.9	19.4	19.6	35.3	851.7
75,0°	37.5	32.9	29.4	26.3	24.9	22.8	19.4	18.9	18.6	17.2	17.2	29.6	881.2
77,5°	33.2	29.0	26.0	23.4	21.9	19.8	16.4	16.6	16.0	14.9	14.8	23.7	904.9
80,0°	29.4	25.3	22.4	20.3	18.6	16.7	13.8	14.2	13.4	12.5	12.1	18.4	923.3
82,5°	24.4	21.3	19.5	17.8	16.2	14.3	11.6	12.1	11.2	10.2	9.9	14.2	937.5
85,0°	20.5	18.1	16.3	14.8	13.5	12.0	9.7	10.0	9.1	8.5	8.1	10.8	948.3
87,5°	17.2	15.2	13.5	12.6	11.1	9.9	8.3	8.4	7.7	7.1	6.7	8.3	956.6
90,0°	10.2	9.6	9.1	8.6	7.9	7.0	6.4	6.3	6.0	5.6	5.3	3.9	960.5
92,5°	9.7	9.1	8.4	7.8	7.3	6.5	6.1	6.1	5.9	5.6	5.6	3.6	964.1
95,0°	9.8	9.2	8.5	8.2	7.6	6.9	6.3	6.4	6.1	6.0	5.9	3.5	967.6
97,5°	9.7	9.0	8.6	8.2	7.7	7.0	6.6	6.2	6.2	6.1	6.0	3.4	971.0
100,0°	9.3	8.9	8.5	8.1	7.6	6.9	6.6	6.3	6.0	6.1	6.0	3.3	974.3
102,5°	8.7	8.3	7.9	7.5	7.0	6.6	6.1	6.0	5.6	5.5	5.6	3.0	977.3
105,0°	8.3	7.8	7.4	7.0	6.6	6.1	5.6	5.5	5.2	4.8	4.9	2.8	980.2
107,5°	7.5	7.2	6.8	6.4	6.0	5.5	5.1	4.9	4.5	4.2	4.3	2.6	982.8
110,0°	7.1	6.7	6.3	5.9	5.5	4.9	4.5	4.4	4.1	3.9	3.5	2.4	985.2
112,5°	6.8	6.3	5.9	5.6	5.2	4.8	4.4	4.1	4.0	3.3	2.4	2.3	987.5

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	9.2	9.7	10.3	10.7	11.2	11.5	11.8	11.6	11.4	11.4	11.5	11.7	11.9
117,5°	8.7	9.3	9.8	10.3	10.7	11.1	11.3	11.1	10.9	10.9	11.1	11.3	11.5
120,0°	8.5	9.0	9.5	9.9	10.2	10.6	10.7	10.5	10.4	10.4	10.7	10.9	11.1
122,5°	8.0	8.6	9.1	9.4	9.7	10.1	10.3	10.0	9.9	10.0	10.3	10.4	10.6
125,0°	6.4	6.8	7.1	7.4	7.6	7.9	8.0	7.8	7.8	7.8	8.0	8.1	8.3
127,5°	4.5	4.7	4.9	5.0	5.1	5.3	5.3	5.3	5.2	5.2	5.2	5.3	5.4
130,0°	3.4	3.5	3.6	3.6	3.6	3.6	3.5	3.5	3.5	3.5	3.5	3.6	3.6
132,5°	2.9	3.1	3.1	3.1	3.1	3.1	3.1	3.0	3.0	3.0	3.0	3.0	3.0
135,0°	2.5	2.6	2.6	2.6	2.5	2.5	2.5	2.5	2.4	2.4	2.4	2.5	2.5
137,5°	2.0	2.1	2.1	2.1	2.1	2.1	2.0	2.0	2.0	1.9	1.9	1.9	1.9
140,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.3	1.3
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9
145,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.6	0.6
147,5°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	12.1	12.4	12.6	12.8	10.5	4.6	8.7	8.1	7.7	7.4	7.3	7.3	7.0
117,5°	11.7	11.9	12.1	12.3	9.2	4.3	8.3	7.8	7.3	7.0	6.9	7.0	6.7
120,0°	11.2	11.4	11.6	11.7	7.8	3.4	8.0	7.5	7.1	6.7	6.7	6.8	6.4
122,5°	10.8	11.0	11.1	11.2	6.9	3.0	7.6	7.2	6.8	6.4	6.2	6.4	6.1
125,0°	8.5	8.7	8.8	8.7	5.4	2.7	6.0	5.6	5.3	5.1	4.9	5.0	4.8
127,5°	5.5	5.6	5.6	5.6	3.5	1.9	4.2	4.0	3.8	3.7	3.6	3.5	3.5
130,0°	3.7	3.7	3.7	3.4	2.3	1.5	3.2	3.1	3.0	3.0	2.8	2.7	2.8
132,5°	3.1	3.1	3.1	2.7	1.9	1.3	2.8	2.7	2.6	2.6	2.5	2.5	2.5
135,0°	2.5	2.5	2.5	2.1	1.6	1.2	2.4	2.4	2.3	2.2	2.1	2.1	2.1
137,5°	1.9	1.9	1.9	1.6	1.1	1.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8
140,0°	1.3	1.3	1.3	1.1	0.9	0.8	1.5	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.9	0.9	0.8	0.8	0.6	0.6	1.0	1.0	1.1	1.1	1.1	1.1	1.1
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	1.0	1.0
147,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.6	6.1	5.8	5.4	5.1	4.7	4.3	4.0	3.8	3.1	1.9	2.1	989.6
117,5°	6.2	5.9	5.5	5.2	4.8	4.5	4.1	3.8	3.5	2.7	1.9	2.0	991.6
120,0°	6.1	5.7	5.4	5.1	4.8	4.4	4.1	3.8	3.4	2.4	1.8	1.9	993.5
122,5°	5.8	5.4	5.1	4.8	4.6	4.2	3.9	3.6	3.2	2.3	1.7	1.7	995.2
125,0°	4.5	4.2	4.0	3.8	3.6	3.3	3.1	2.9	2.5	1.9	1.6	1.3	996.6
127,5°	3.3	3.2	3.1	2.8	2.7	2.6	2.5	2.3	2.0	1.6	1.4	0.9	997.4
130,0°	2.7	2.6	2.6	2.5	2.4	2.3	2.1	2.0	1.7	1.5	1.4	0.6	998.1
132,5°	2.4	2.4	2.3	2.3	2.2	2.1	2.0	1.9	1.6	1.5	1.3	0.5	998.6
135,0°	2.1	2.1	2.0	2.0	1.9	1.8	1.8	1.7	1.5	1.3	1.2	0.4	999.0
137,5°	1.8	1.7	1.7	1.7	1.6	1.5	1.5	1.4	1.3	1.2	1.1	0.3	999.3
140,0°	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.1	1.0	1.0	0.2	999.6
142,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	1.0	1.0	0.2	999.7
145,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	999.9
147,5°	0.9	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>LANTERN CLASSIC LED</b>	<b>Order number: 5XA5245LF14H + 5XA54000XSA</b> <b>EAN: 4058352834596 + 4058352161326</b>	<b>LP number</b> <b>59286_21</b>
<b>Dimming levels table</b>		<b>environmental temperature: 25°C</b>
<b>siteco</b>		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	950	10.0	10.4	10.2
95	241	252	901	9.5	9.9	9.7
90	229	250	856	9.0	9.3	9.2
85	216	248	808	8.5	8.8	8.6
80	203	246	759	8.0	8.3	8.2
75	190	243	711	7.6	7.7	7.6
70	178	241	666	7.1	7.3	7.2
65	165	238	617	6.6	6.8	6.7
60	152	235	569	6.1	6.4	6.2
55	140	232	524	5.7	5.9	5.8
50	127	229	475	5.3	5.5	5.4
45	114	225	426	4.8	5.0	4.9
40	102	221	381	4.4	4.6	4.5
35	89	216	333	4.0	4.1	4.0
30	76	210	284	3.6	3.7	3.6
30	75	209	281	3.5	3.7	3.6