


# Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number:</b> 5XA5425FF14H + 5XA54000XS <b>EAN:</b> 4058352636558 + 4050737730073	<b>LP number</b> <b>59289_18</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, structured <b>Optic</b> asymmetric, extremely wide distribution (P1.0a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1440 lm Power consumption = 10.5 W Luminous efficacy = 137.1 lm/W	<b>serial documentation</b> <b>08.07.2022</b>






**Luminous intensity in cd/klm**
C180-0
C190-10
C195-15
C270-90
**Imax: 572 cd/klm**

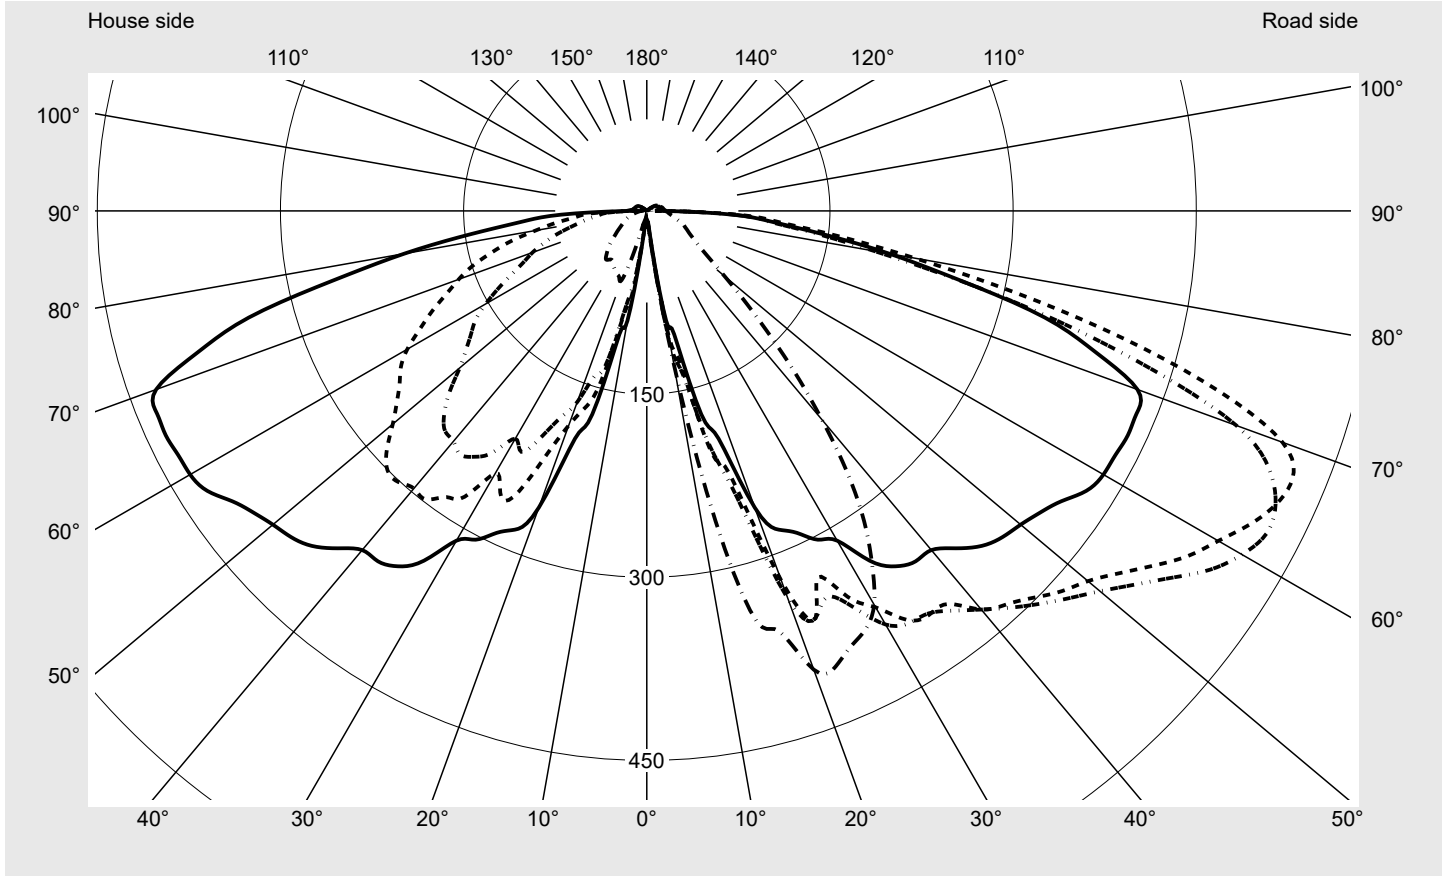


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	96.5%
Eta 90° - 180°	3.5%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	554.0
Imax 80°	225.2
Imax 90°	14.8
Imax >90°	14.6
Imax >95°	13.7

**Photometric test report**

<b>Family</b> LITEPOLE 2	<b>Order number:</b> 5XA5425FF14H + 5XA54000XS <b>EAN:</b> 4058352636558 + 4050737730073	<b>LP number</b> 59289_18
-----------------------------	---	------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**    **siteco**

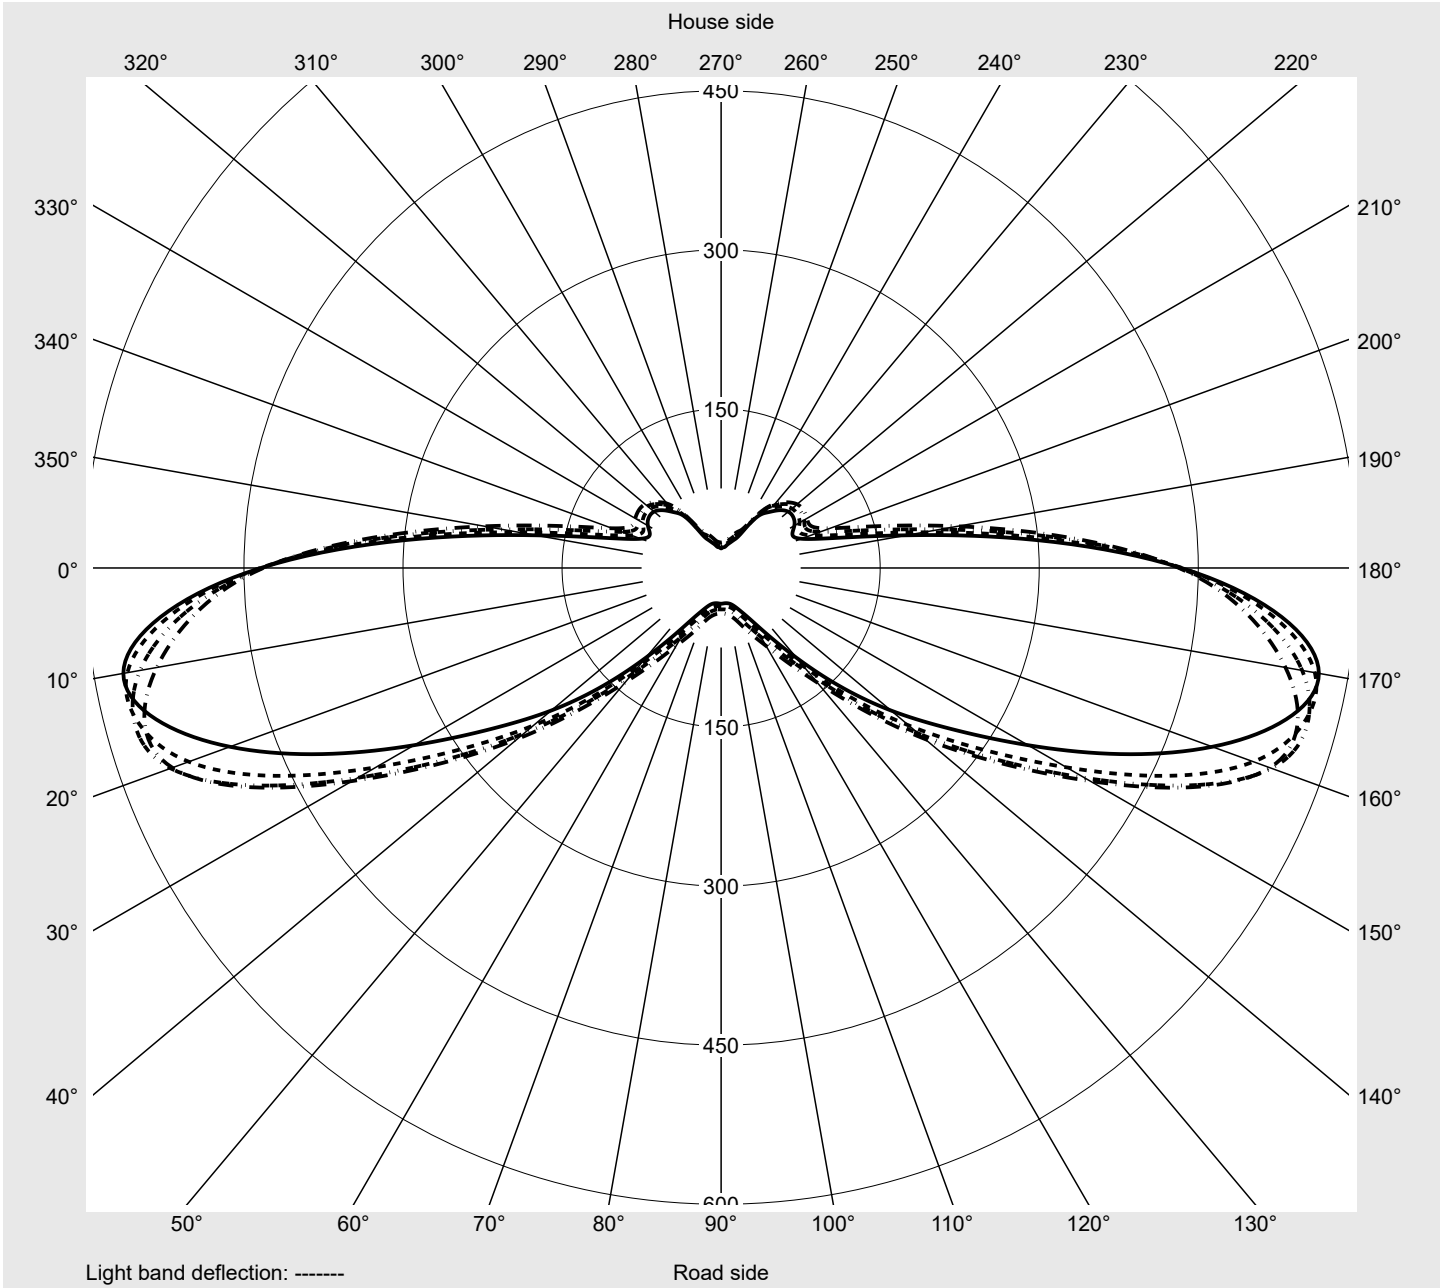

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9
2,5°	11.2	11.2	11.2	11.3	11.3	11.4	11.5	11.6	11.7	11.9	11.9	12.1	12.3
5,0°	12.0	12.1	12.4	12.6	12.9	13.3	13.5	13.8	14.1	14.5	14.6	14.6	14.6
7,5°	20.1	23.4	27.2	31.5	35.6	39.7	43.0	45.4	45.8	45.8	44.5	42.5	41.1
10,0°	91.4	97.2	105.8	110.9	113.4	113.2	114.1	119.3	122.4	122.8	122.6	125.3	124.7
12,5°	103.3	120.6	130.3	137.9	145.6	150.1	156.3	173.7	186.0	198.4	203.9	219.4	234.0
15,0°	172.4	188.9	205.1	199.0	210.6	219.5	232.8	243.9	263.7	292.0	310.4	316.5	313.6
17,5°	195.5	212.7	226.3	246.3	268.4	306.3	326.8	345.4	355.5	362.1	371.3	381.6	384.9
20,0°	258.6	300.0	322.5	338.4	348.4	363.0	360.0	369.6	367.1	381.0	390.6	395.3	397.3
22,5°	282.6	324.9	361.1	360.9	377.7	382.1	380.3	394.0	392.3	401.7	407.0	412.6	413.5
25,0°	290.9	323.2	331.2	348.9	362.9	380.3	378.5	392.1	388.5	398.3	406.5	413.3	412.3
27,5°	303.5	334.9	356.3	365.6	374.7	388.1	386.5	399.4	395.4	398.2	396.9	394.7	391.4
30,0°	311.8	351.1	374.8	391.1	390.3	395.2	395.5	403.8	387.6	385.4	379.0	372.4	364.2
32,5°	339.6	367.4	397.2	400.0	401.7	408.2	403.9	404.2	381.6	371.9	358.0	346.5	334.9
35,0°	355.3	387.8	403.6	402.4	415.2	420.2	407.2	395.8	369.3	353.7	334.4	316.6	300.9
37,5°	361.7	387.6	405.7	412.6	415.8	413.1	397.6	383.6	355.1	335.8	311.6	287.3	268.4
40,0°	362.6	398.7	426.1	426.2	421.6	410.9	391.7	374.3	340.4	316.3	286.1	257.1	238.7
42,5°	374.7	410.3	436.8	440.7	435.5	419.8	392.4	365.2	327.1	296.8	260.3	229.9	210.3
45,0°	387.9	422.1	447.9	455.0	450.8	429.6	393.1	357.1	310.4	273.0	234.4	203.2	183.7
47,5°	395.3	436.7	460.9	469.4	462.9	432.5	389.5	344.7	292.6	250.3	208.9	180.3	161.6
50,0°	399.7	446.5	471.7	484.5	476.1	438.5	387.8	334.7	277.2	230.1	187.0	160.0	141.5
52,5°	405.9	458.9	487.5	502.9	491.1	447.2	385.8	325.5	263.8	212.2	168.8	142.0	122.6
55,0°	414.5	474.3	506.5	524.0	511.6	462.4	392.4	322.0	258.2	202.7	157.9	128.9	107.9
57,5°	426.7	489.9	525.8	546.9	534.4	476.9	396.0	320.4	253.7	195.4	148.2	117.0	95.3
60,0°	431.8	498.1	540.5	562.9	550.7	489.2	401.9	320.4	250.9	189.1	140.9	108.0	84.9
62,5°	432.7	510.0	556.4	572.2	552.5	485.2	395.7	313.7	242.7	180.7	130.8	97.6	75.0
65,0°	434.7	522.4	568.6	568.2	534.3	463.8	376.0	297.0	231.0	171.9	121.2	88.1	66.0
67,5°	434.1	530.7	572.4	551.6	493.0	415.3	334.2	264.6	209.1	156.9	110.5	77.5	57.0
70,0°	427.6	519.9	554.0	513.8	437.0	357.5	283.6	225.0	183.0	142.2	100.8	69.3	50.7
72,5°	385.9	471.3	491.7	436.6	352.7	281.2	220.1	175.9	146.7	118.4	85.0	58.4	42.2
75,0°	337.5	397.6	404.8	348.6	273.9	215.6	168.9	135.1	114.2	95.6	71.1	49.6	36.4
77,5°	263.0	309.8	309.1	261.3	203.1	159.1	125.3	101.2	85.5	73.4	57.2	41.2	31.1
80,0°	201.7	225.2	222.9	189.1	149.1	117.0	94.4	76.8	64.0	55.5	45.3	34.7	27.1
82,5°	144.9	159.0	158.1	137.5	110.7	87.4	71.9	59.3	49.0	42.7	36.4	29.3	24.0
85,0°	103.3	110.5	110.5	100.3	83.0	66.4	55.3	46.7	38.8	34.0	29.9	25.4	21.7
87,5°	70.1	76.8	77.6	72.5	61.2	50.0	42.7	36.8	31.2	27.6	25.1	22.2	19.9
90,0°	12.5	12.8	13.2	13.4	13.5	13.6	13.8	13.9	14.0	14.1	14.3	14.4	14.6
92,5°	11.8	12.3	12.6	12.8	13.0	13.2	13.4	13.5	13.7	13.8	14.0	14.1	14.3
95,0°	11.3	11.8	12.1	12.4	12.6	12.8	13.0	13.2	13.3	13.4	13.6	13.7	13.8
97,5°	11.1	11.4	11.8	12.0	12.2	12.4	12.6	12.7	12.9	13.0	13.2	13.3	13.4
100,0°	10.7	11.1	11.4	11.7	11.9	12.0	12.2	12.4	12.5	12.7	12.8	12.9	13.0
102,5°	10.4	10.7	11.0	11.3	11.5	11.7	11.9	12.0	12.2	12.3	12.5	12.6	12.7
105,0°	10.1	10.4	10.7	11.0	11.2	11.4	11.5	11.7	11.9	12.0	12.2	12.3	12.5
107,5°	9.8	10.1	10.4	10.6	10.9	11.1	11.2	11.4	11.5	11.7	11.9	12.0	12.2
110,0°	9.6	9.9	10.2	10.4	10.6	10.8	11.0	11.2	11.3	11.5	11.6	11.8	11.9
112,5°	9.2	9.5	9.8	10.1	10.3	10.5	10.7	10.8	11.0	11.2	11.3	11.5	11.6

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9
2,5°	12.5	12.6	12.8	12.9	13.0	13.0	11.2	11.2	11.2	11.3	11.4	11.4	11.5
5,0°	14.7	14.7	14.8	14.8	14.7	14.7	11.9	11.8	11.7	11.7	11.7	11.7	11.7
7,5°	39.0	37.4	35.6	34.8	34.2	34.2	17.5	15.5	14.4	13.7	13.3	13.0	12.8
10,0°	124.0	124.4	124.8	126.6	126.9	127.5	84.4	70.3	57.7	47.4	35.5	24.2	18.5
12,5°	246.0	254.7	251.6	255.6	257.6	260.2	95.4	87.2	82.6	78.8	78.4	66.0	56.6
15,0°	317.9	330.0	336.6	345.5	345.7	348.1	159.2	144.0	131.7	125.6	118.8	102.9	86.5
17,5°	375.4	374.1	366.7	360.4	356.8	360.9	185.7	169.5	141.6	121.7	102.5	92.3	84.4
20,0°	395.5	401.8	401.8	400.7	399.2	399.8	212.2	187.0	166.6	153.6	130.1	114.0	100.7
22,5°	409.0	405.4	403.4	402.4	401.8	404.0	240.9	218.4	182.5	159.4	131.3	112.2	99.7
25,0°	405.5	402.9	397.5	395.1	394.5	394.2	261.6	258.4	204.3	181.5	147.1	122.1	97.9
27,5°	385.8	383.7	382.2	382.4	385.7	387.1	284.2	259.9	222.4	188.4	150.7	133.2	104.6
30,0°	357.9	355.9	359.5	364.2	370.4	372.3	281.8	248.1	215.3	188.2	153.3	140.8	115.3
32,5°	327.6	326.9	331.0	335.5	341.6	343.5	310.5	277.5	234.4	191.9	156.4	148.3	132.1
35,0°	292.5	292.5	297.7	302.9	308.8	310.4	322.2	286.1	245.8	208.7	166.1	156.0	140.0
37,5°	261.9	262.7	265.3	266.6	268.6	269.3	332.0	297.7	251.4	208.5	163.5	150.1	136.8
40,0°	232.0	230.4	228.8	225.6	223.9	223.0	331.5	296.7	246.3	198.9	156.4	144.9	133.7
42,5°	202.0	196.9	191.4	184.6	180.9	179.5	344.0	301.1	244.5	192.0	150.2	141.1	132.1
45,0°	172.9	164.6	155.6	147.0	141.1	139.0	354.5	300.3	234.5	178.7	139.5	130.4	126.3
47,5°	147.8	136.9	126.0	116.1	109.5	107.3	350.5	288.6	218.9	160.7	125.7	119.3	119.3
50,0°	125.6	113.0	101.0	91.3	85.2	83.1	341.5	271.5	200.0	143.7	113.4	109.7	112.0
52,5°	106.5	93.4	81.4	73.1	68.0	66.3	334.0	258.1	186.5	132.3	105.1	101.4	104.0
55,0°	92.0	79.0	67.7	60.3	56.4	55.2	330.5	247.1	175.7	123.4	100.1	97.6	100.1
57,5°	79.5	67.0	57.2	51.5	48.7	48.0	332.9	238.9	166.3	117.6	97.3	95.0	96.7
60,0°	69.9	58.1	49.8	45.4	43.4	43.0	329.2	226.4	152.3	109.5	93.7	93.5	94.9
62,5°	60.4	50.0	43.6	40.6	39.2	39.1	322.0	209.5	136.7	99.6	88.2	90.4	92.0
65,0°	53.0	44.2	39.3	37.0	36.2	36.3	312.1	193.8	121.4	90.0	81.2	85.4	87.9
67,5°	45.8	39.1	35.3	33.8	33.5	33.7	300.2	177.6	108.8	80.6	74.2	79.7	83.2
70,0°	40.5	35.3	32.5	31.4	31.3	31.7	285.4	163.9	99.6	72.9	67.7	72.6	76.1
72,5°	34.5	30.6	28.6	27.8	27.7	27.9	259.7	149.5	88.8	64.5	61.2	65.9	69.9
75,0°	30.1	27.2	25.7	25.1	25.1	25.2	226.1	131.4	78.1	56.1	53.1	57.7	61.1
77,5°	26.2	24.1	23.0	22.6	22.6	22.7	187.8	113.5	66.2	47.3	44.9	48.4	50.8
80,0°	23.4	21.7	20.9	20.6	20.5	20.5	146.7	92.4	55.9	40.1	38.3	41.1	42.2
82,5°	21.2	20.0	19.3	19.0	19.0	18.9	111.7	75.2	47.5	34.2	32.6	34.4	34.5
85,0°	19.7	18.7	18.1	17.8	17.7	17.6	82.3	58.5	39.1	28.9	27.2	28.1	27.5
87,5°	18.3	17.5	17.1	16.8	16.7	16.6	60.4	44.9	31.3	23.2	21.1	20.7	19.4
90,0°	14.7	14.7	14.7	14.7	14.8	14.8	11.8	11.2	10.6	9.9	9.3	8.7	8.1
92,5°	14.3	14.3	14.4	14.4	14.5	14.6	11.3	10.7	10.1	9.5	8.9	8.3	7.8
95,0°	13.9	14.0	14.0	14.0	14.0	14.1	10.9	10.4	9.8	9.2	8.6	8.1	7.6
97,5°	13.5	13.6	13.6	13.6	13.7	13.7	10.5	10.1	9.6	9.0	8.4	7.9	7.5
100,0°	13.2	13.2	13.3	13.3	13.3	13.3	10.3	9.8	9.3	8.8	8.3	7.8	7.4
102,5°	12.8	12.9	12.9	13.0	13.0	13.0	10.0	9.5	9.1	8.6	8.1	7.6	7.2
105,0°	12.6	12.6	12.6	12.7	12.7	12.3	9.7	9.2	8.8	8.4	7.9	7.5	7.0
107,5°	12.3	12.4	12.5	12.5	12.5	11.6	9.4	9.1	8.6	8.2	7.7	7.3	6.9
110,0°	12.1	12.1	12.2	12.2	12.2	10.6	9.2	8.8	8.4	8.0	7.6	7.2	6.8
112,5°	11.8	11.9	11.9	11.9	11.1	7.0	8.9	8.5	8.2	7.8	7.4	7.0	6.6

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	0.0	0.0
2,5°	11.6	11.7	11.9	12.0	12.1	12.3	12.3	12.4	12.5	12.6	12.5	0.1	0.2
5,0°	11.8	11.8	11.9	11.9	12.1	12.1	12.2	12.2	12.2	12.2	12.2	0.3	0.5
7,5°	12.6	12.4	12.2	12.2	12.1	12.0	11.9	11.9	11.9	11.9	11.9	0.9	1.4
10,0°	14.8	13.4	13.0	12.6	12.3	12.1	12.0	12.0	11.9	11.9	11.9	3.5	4.9
12,5°	48.6	43.4	31.2	24.5	17.6	13.9	12.6	12.1	12.0	11.9	11.9	7.1	12.0
15,0°	73.4	73.1	56.8	50.2	40.0	31.2	25.1	22.4	18.5	14.0	12.8	12.4	24.4
17,5°	81.8	74.3	58.7	57.6	51.9	49.9	47.8	44.4	41.5	38.0	38.9	17.1	41.5
20,0°	87.9	74.1	64.5	60.7	58.4	57.7	56.4	53.0	54.0	58.9	60.4	22.2	63.7
22,5°	85.8	70.5	60.5	57.4	57.6	58.6	59.3	53.6	58.8	59.3	59.1	26.0	89.6
25,0°	79.5	68.9	59.0	55.0	54.1	57.0	58.7	55.2	55.5	57.1	57.3	28.7	118.3
27,5°	80.6	65.1	59.0	57.6	58.7	61.0	60.7	54.6	53.8	55.6	55.4	31.6	149.9
30,0°	92.9	78.8	70.8	67.0	65.1	61.9	59.6	54.4	51.2	53.7	53.6	34.0	183.9
32,5°	102.2	85.8	77.6	74.8	73.6	67.3	61.5	55.4	48.5	51.6	51.5	36.5	220.4
35,0°	116.8	103.5	91.5	82.7	76.7	68.4	61.9	55.3	51.8	50.8	49.4	38.5	258.9
37,5°	116.3	105.6	95.4	87.4	80.6	72.4	64.2	55.1	51.6	50.6	50.2	39.6	298.5
40,0°	117.3	105.0	92.4	84.1	76.9	69.7	62.8	55.0	52.4	52.1	51.9	40.2	338.7
42,5°	118.3	107.3	93.9	81.5	74.7	68.9	60.7	52.2	50.2	49.5	49.0	40.8	379.5
45,0°	118.3	108.9	95.1	80.7	70.8	63.7	55.8	48.8	46.0	45.8	45.4	41.0	420.5
47,5°	114.0	106.6	95.0	78.4	66.4	58.9	51.1	45.0	41.6	40.7	41.7	40.9	461.4
50,0°	109.9	103.3	92.8	74.6	61.5	53.2	46.3	40.8	36.5	34.3	37.1	40.6	501.9
52,5°	102.8	98.0	89.3	71.5	55.8	48.1	42.0	37.0	32.3	31.9	32.8	40.6	542.5
55,0°	99.4	94.0	86.3	68.6	51.6	44.1	38.5	33.6	30.7	29.7	29.7	41.2	583.8
57,5°	95.5	90.0	82.2	65.9	47.9	41.1	35.8	31.1	28.4	27.3	26.6	42.1	625.9
60,0°	93.5	87.7	79.2	63.7	44.5	37.9	33.2	29.0	25.8	24.5	24.1	42.8	668.7
62,5°	90.7	85.3	76.7	63.1	41.1	34.6	30.4	26.9	23.6	22.9	22.0	42.8	711.5
65,0°	87.2	82.2	73.2	60.1	39.6	32.0	27.9	24.8	22.1	20.9	20.3	42.3	753.8
67,5°	82.6	77.0	68.5	58.4	37.8	29.5	25.7	22.9	20.2	19.5	18.5	40.6	794.3
70,0°	75.4	69.8	62.4	54.7	36.1	27.1	23.3	20.9	18.6	17.8	16.9	38.0	832.3
72,5°	69.0	62.0	55.0	49.2	32.5	24.2	20.7	18.6	16.5	15.8	14.9	33.1	865.4
75,0°	59.4	52.1	45.6	40.6	27.8	21.0	18.0	16.3	14.5	13.8	13.0	27.8	893.2
77,5°	48.6	41.9	36.3	32.4	23.0	17.9	15.4	14.0	12.5	11.8	11.0	22.1	915.2
80,0°	39.4	33.1	28.9	25.8	19.1	15.3	13.2	11.8	10.6	9.8	9.3	17.2	932.4
82,5°	31.6	26.5	23.3	21.0	16.0	13.0	11.2	10.0	8.9	8.2	7.8	13.3	945.7
85,0°	24.8	20.8	18.5	16.8	13.3	10.9	9.3	8.3	7.5	6.7	6.5	10.3	956.0
87,5°	17.3	14.8	13.3	12.1	10.2	8.9	7.9	7.0	6.3	5.6	5.5	7.9	963.9
90,0°	7.5	6.9	6.3	5.8	5.3	4.9	4.5	4.2	4.0	3.6	3.5	2.9	966.8
92,5°	7.2	6.7	6.2	5.6	5.2	4.8	4.5	4.2	3.9	3.6	3.5	2.8	969.6
95,0°	7.0	6.6	6.1	5.6	5.2	4.8	4.5	4.2	3.9	3.6	3.5	2.7	972.4
97,5°	7.0	6.5	6.0	5.6	5.1	4.8	4.5	4.2	3.9	3.7	3.6	2.7	975.0
100,0°	6.9	6.4	6.0	5.6	5.2	4.9	4.6	4.3	4.0	3.8	3.6	2.6	977.6
102,5°	6.8	6.3	5.9	5.5	5.1	4.9	4.6	4.3	4.1	3.9	3.7	2.5	980.1
105,0°	6.6	6.3	5.8	5.5	5.1	4.9	4.6	4.3	4.1	3.9	3.6	2.4	982.5
107,5°	6.5	6.2	5.7	5.4	5.0	4.8	4.6	4.3	4.1	3.9	3.5	2.3	984.9
110,0°	6.4	6.1	5.7	5.4	5.0	4.8	4.6	4.3	4.1	3.8	2.9	2.3	987.1
112,5°	6.3	5.9	5.6	5.3	4.9	4.7	4.5	4.3	4.1	3.4	2.1	2.1	989.3

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	9.0	9.3	9.5	9.8	10.0	10.2	10.4	10.5	10.7	10.9	11.1	11.2	11.4
117,5°	8.5	8.9	9.1	9.4	9.7	9.9	10.1	10.2	10.4	10.5	10.7	10.9	11.1
120,0°	8.1	8.4	8.6	8.9	9.1	9.3	9.5	9.7	9.8	10.0	10.2	10.4	10.5
122,5°	7.0	7.4	7.7	7.9	8.1	8.3	8.4	8.5	8.7	8.9	9.1	9.1	9.3
125,0°	5.5	5.6	5.8	6.0	6.1	6.3	6.3	6.4	6.5	6.7	6.8	6.9	7.0
127,5°	3.6	3.7	3.8	3.9	3.9	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.2
130,0°	2.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.6	2.6	2.6	2.6	2.7
132,5°	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	2.2
135,0°	2.0	2.0	2.0	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.8
137,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.3	1.3	1.3
140,0°	1.2	1.2	1.1	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8
142,5°	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	11.5	11.6	11.7	11.7	9.5	3.5	8.6	8.3	7.9	7.6	7.2	6.8	6.4
117,5°	11.2	11.3	11.4	11.4	8.4	3.4	8.3	7.9	7.6	7.2	6.9	6.5	6.1
120,0°	10.6	10.7	10.8	10.9	7.0	2.8	7.7	7.4	7.1	6.8	6.4	6.1	5.7
122,5°	9.5	9.6	9.7	9.7	6.0	2.6	6.8	6.5	6.3	6.0	5.6	5.4	5.1
125,0°	7.1	7.2	7.2	7.1	4.4	2.1	5.2	4.9	4.8	4.5	4.3	4.2	3.9
127,5°	4.3	4.3	4.3	4.2	2.7	1.6	3.5	3.3	3.2	3.1	3.0	2.8	2.8
130,0°	2.7	2.7	2.7	2.5	1.7	1.3	2.5	2.5	2.4	2.4	2.3	2.3	2.2
132,5°	2.2	2.2	2.2	2.0	1.4	1.1	2.2	2.2	2.1	2.1	2.1	2.1	2.1
135,0°	1.8	1.8	1.8	1.5	1.2	1.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8
137,5°	1.3	1.3	1.3	1.1	0.8	0.8	1.5	1.5	1.5	1.5	1.5	1.5	1.5
140,0°	0.8	0.8	0.8	0.7	0.6	0.6	1.2	1.1	1.1	1.1	1.1	1.1	1.1
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	0.9	1.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.1	5.7	5.5	5.1	4.9	4.6	4.4	4.2	4.0	3.0	1.6	2.0	991.3
117,5°	5.7	5.5	5.1	4.8	4.5	4.3	4.1	3.8	3.6	2.7	1.6	1.9	993.2
120,0°	5.4	5.1	4.8	4.5	4.2	4.0	3.8	3.6	3.4	2.3	1.6	1.7	994.9
122,5°	4.8	4.5	4.2	4.0	3.7	3.5	3.3	3.2	2.9	2.1	1.6	1.5	996.4
125,0°	3.7	3.5	3.3	3.1	2.8	2.7	2.6	2.4	2.1	1.7	1.4	1.1	997.5
127,5°	2.7	2.5	2.4	2.3	2.2	2.1	2.0	1.9	1.7	1.4	1.3	0.7	998.2
130,0°	2.2	2.1	2.0	1.9	1.8	1.8	1.7	1.6	1.4	1.3	1.3	0.5	998.7
132,5°	2.0	1.9	1.9	1.8	1.7	1.7	1.6	1.5	1.4	1.2	1.3	0.4	999.1
135,0°	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.2	1.2	0.3	999.4
137,5°	1.5	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.1	1.0	1.0	0.2	999.7
140,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.2	999.9
142,5°	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>LITEPOLE 2</b>	<b>Order number: 5XA5425FF14H + 5XA54000XS</b> <b>EAN: 4058352636558 + 4050737730073</b>	<b>LP number</b> <b>59289_18</b>
------------------------------------	---	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sit</b> eco
-----------------------------	---------------------------------	----------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1440	10.5	10.8	10.6
95	241	252	1366	10.0	10.3	10.2
90	229	250	1298	9.4	9.8	9.6
85	216	248	1225	8.9	9.2	9.0
80	203	246	1151	8.3	8.7	8.5
75	190	243	1077	7.8	8.1	8.0
70	178	241	1009	7.3	7.6	7.4
65	165	238	935	6.9	7.1	7.0
60	152	235	862	6.4	6.6	6.5
55	140	232	794	5.9	6.1	6.0
50	127	229	720	5.4	5.6	5.5
45	114	225	646	5.0	5.2	5.1
40	102	221	578	4.6	4.7	4.6
35	89	216	505	4.1	4.3	4.2
30	76	210	431	3.7	3.8	3.8
28	72	208	408	3.5	3.7	3.6