

Photometric test report


Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
	Version post-top- or mounting to wall arm, spreader element, amber Optic asymmetric, extremely wide distribution (P1.0a) Cover cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1070 lm Power consumption = 10.0 W Luminous efficacy = 107 lm/W	serial documentation 08.07.2022







Luminous intensity in cd/klm
C180-0
C190-10
C195-15
C270-90
Imax: 572 cd/klm

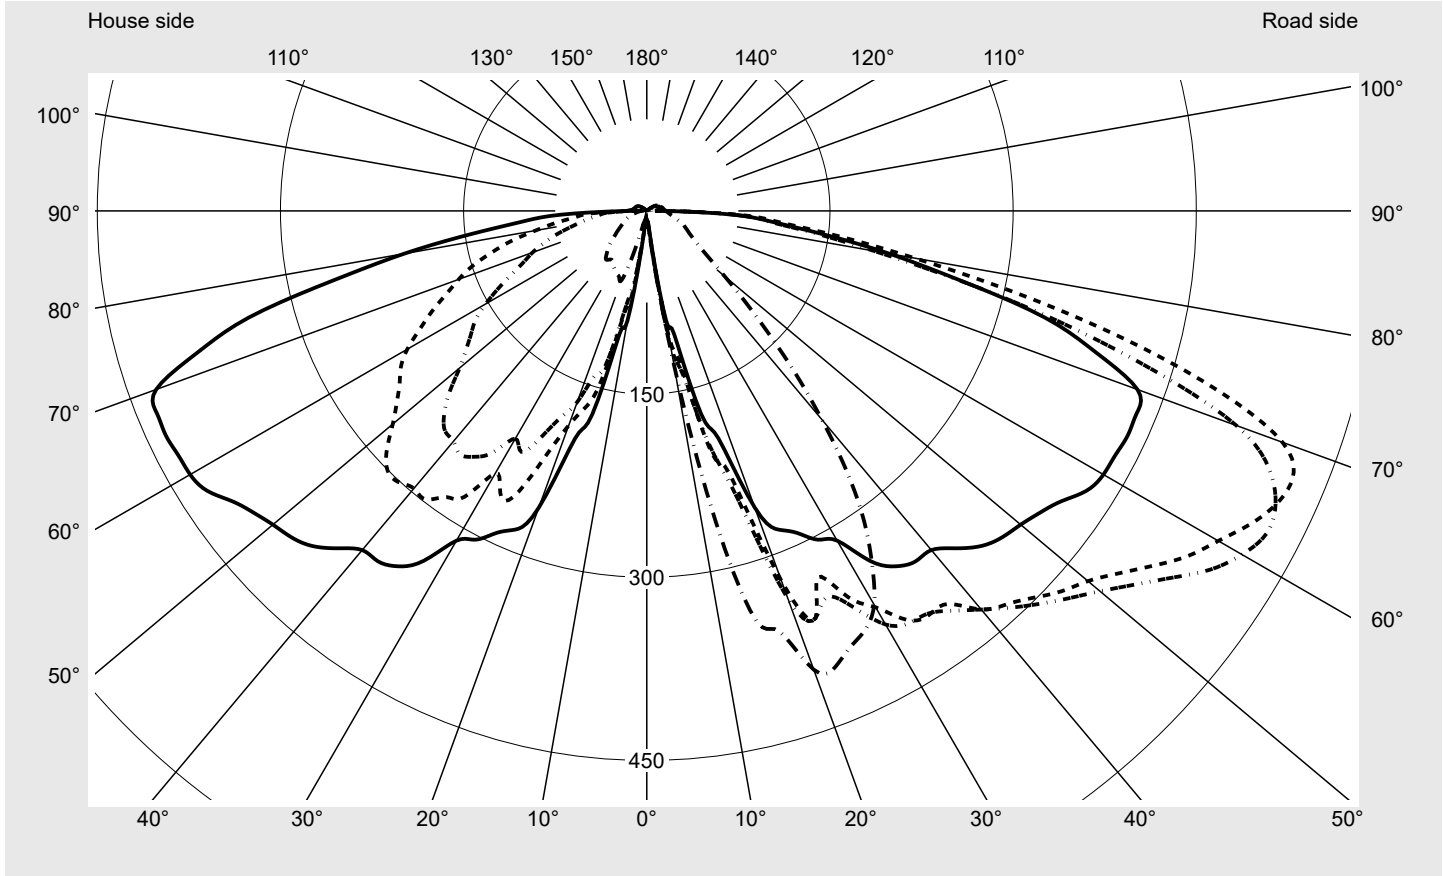


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	96.5%
Eta 90° - 180°	3.5%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	554.0
Imax 80°	225.2
Imax 90°	14.8
Imax >90°	14.6
Imax >95°	13.7

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
-----------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

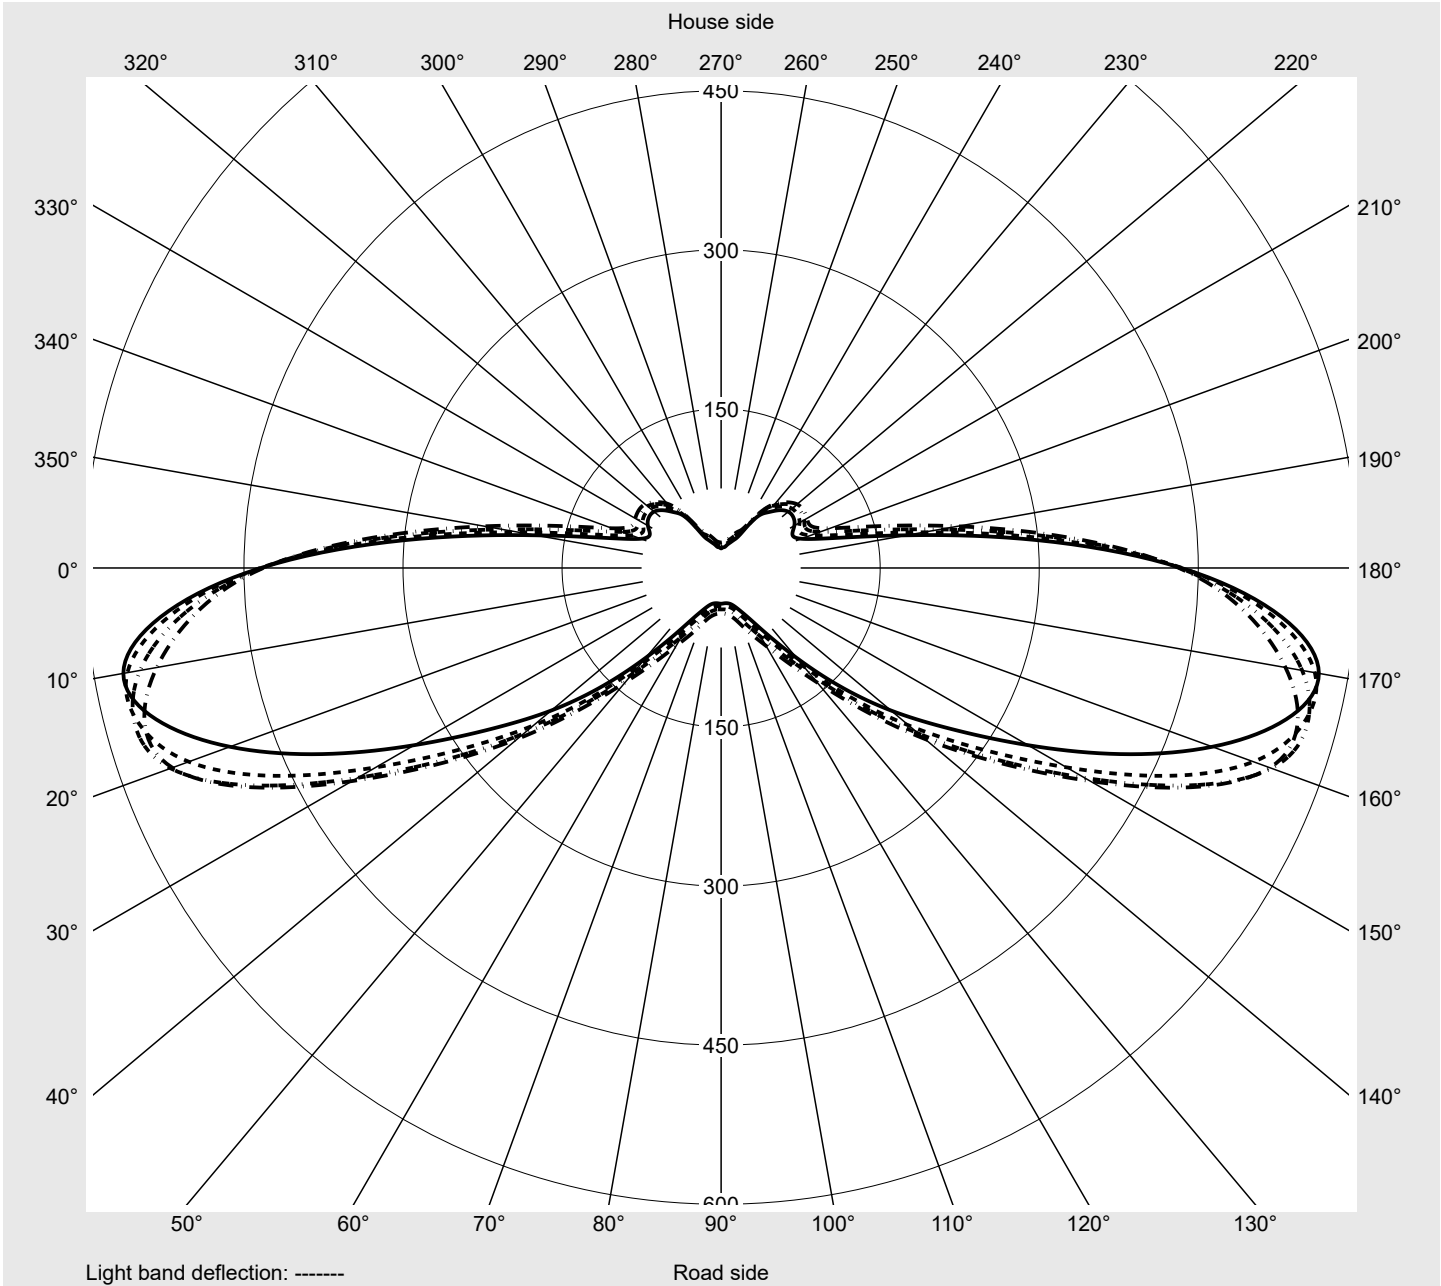

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9
2,5°	11.2	11.2	11.2	11.3	11.3	11.4	11.5	11.6	11.7	11.9	11.9	12.1	12.3
5,0°	12.0	12.1	12.4	12.6	12.9	13.3	13.5	13.8	14.1	14.5	14.6	14.6	14.6
7,5°	20.1	23.4	27.2	31.5	35.6	39.7	43.0	45.4	45.8	45.8	44.5	42.5	41.1
10,0°	91.4	97.2	105.8	110.9	113.4	113.2	114.1	119.3	122.4	122.8	122.6	125.3	124.7
12,5°	103.3	120.6	130.3	137.9	145.6	150.1	156.3	173.7	186.0	198.4	203.9	219.4	234.0
15,0°	172.4	188.9	205.1	199.0	210.6	219.5	232.8	243.9	263.7	292.0	310.4	316.5	313.6
17,5°	195.5	212.7	226.3	246.3	268.4	306.3	326.8	345.4	355.5	362.1	371.3	381.6	384.9
20,0°	258.6	300.0	322.5	338.4	348.4	363.0	360.0	369.6	367.1	381.0	390.6	395.3	397.3
22,5°	282.6	324.9	361.1	360.9	377.7	382.1	380.3	394.0	392.3	401.7	407.0	412.6	413.5
25,0°	290.9	323.2	331.2	348.9	362.9	380.3	378.5	392.1	388.5	398.3	406.5	413.3	412.3
27,5°	303.5	334.9	356.3	365.6	374.7	388.1	386.5	399.4	395.4	398.2	396.9	394.7	391.4
30,0°	311.8	351.1	374.8	391.1	390.3	395.2	395.5	403.8	387.6	385.4	379.0	372.4	364.2
32,5°	339.6	367.4	397.2	400.0	401.7	408.2	403.9	404.2	381.6	371.9	358.0	346.5	334.9
35,0°	355.3	387.8	403.6	402.4	415.2	420.2	407.2	395.8	369.3	353.7	334.4	316.6	300.9
37,5°	361.7	387.6	405.7	412.6	415.8	413.1	397.6	383.6	355.1	335.8	311.6	287.3	268.4
40,0°	362.6	398.7	426.1	426.2	421.6	410.9	391.7	374.3	340.4	316.3	286.1	257.1	238.7
42,5°	374.7	410.3	436.8	440.7	435.5	419.8	392.4	365.2	327.1	296.8	260.3	229.9	210.3
45,0°	387.9	422.1	447.9	455.0	450.8	429.6	393.1	357.1	310.4	273.0	234.4	203.2	183.7
47,5°	395.3	436.7	460.9	469.4	462.9	432.5	389.5	344.7	292.6	250.3	208.9	180.3	161.6
50,0°	399.7	446.5	471.7	484.5	476.1	438.5	387.8	334.7	277.2	230.1	187.0	160.0	141.5
52,5°	405.9	458.9	487.5	502.9	491.1	447.2	385.8	325.5	263.8	212.2	168.8	142.0	122.6
55,0°	414.5	474.3	506.5	524.0	511.6	462.4	392.4	322.0	258.2	202.7	157.9	128.9	107.9
57,5°	426.7	489.9	525.8	546.9	534.4	476.9	396.0	320.4	253.7	195.4	148.2	117.0	95.3
60,0°	431.8	498.1	540.5	562.9	550.7	489.2	401.9	320.4	250.9	189.1	140.9	108.0	84.9
62,5°	432.7	510.0	556.4	572.2	552.5	485.2	395.7	313.7	242.7	180.7	130.8	97.6	75.0
65,0°	434.7	522.4	568.6	568.2	534.3	463.8	376.0	297.0	231.0	171.9	121.2	88.1	66.0
67,5°	434.1	530.7	572.4	551.6	493.0	415.3	334.2	264.6	209.1	156.9	110.5	77.5	57.0
70,0°	427.6	519.9	554.0	513.8	437.0	357.5	283.6	225.0	183.0	142.2	100.8	69.3	50.7
72,5°	385.9	471.3	491.7	436.6	352.7	281.2	220.1	175.9	146.7	118.4	85.0	58.4	42.2
75,0°	337.5	397.6	404.8	348.6	273.9	215.6	168.9	135.1	114.2	95.6	71.1	49.6	36.4
77,5°	263.0	309.8	309.1	261.3	203.1	159.1	125.3	101.2	85.5	73.4	57.2	41.2	31.1
80,0°	201.7	225.2	222.9	189.1	149.1	117.0	94.4	76.8	64.0	55.5	45.3	34.7	27.1
82,5°	144.9	159.0	158.1	137.5	110.7	87.4	71.9	59.3	49.0	42.7	36.4	29.3	24.0
85,0°	103.3	110.5	110.5	100.3	83.0	66.4	55.3	46.7	38.8	34.0	29.9	25.4	21.7
87,5°	70.1	76.8	77.6	72.5	61.2	50.0	42.7	36.8	31.2	27.6	25.1	22.2	19.9
90,0°	12.5	12.8	13.2	13.4	13.5	13.6	13.8	13.9	14.0	14.1	14.3	14.4	14.6
92,5°	11.8	12.3	12.6	12.8	13.0	13.2	13.4	13.5	13.7	13.8	14.0	14.1	14.3
95,0°	11.3	11.8	12.1	12.4	12.6	12.8	13.0	13.2	13.3	13.4	13.6	13.7	13.8
97,5°	11.1	11.4	11.8	12.0	12.2	12.4	12.6	12.7	12.9	13.0	13.2	13.3	13.4
100,0°	10.7	11.1	11.4	11.7	11.9	12.0	12.2	12.4	12.5	12.7	12.8	12.9	13.0
102,5°	10.4	10.7	11.0	11.3	11.5	11.7	11.9	12.0	12.2	12.3	12.5	12.6	12.7
105,0°	10.1	10.4	10.7	11.0	11.2	11.4	11.5	11.7	11.9	12.0	12.2	12.3	12.5
107,5°	9.8	10.1	10.4	10.6	10.9	11.1	11.2	11.4	11.5	11.7	11.9	12.0	12.2
110,0°	9.6	9.9	10.2	10.4	10.6	10.8	11.0	11.2	11.3	11.5	11.6	11.8	11.9
112,5°	9.2	9.5	9.8	10.1	10.3	10.5	10.7	10.8	11.0	11.2	11.3	11.5	11.6

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9
2,5°	12.5	12.6	12.8	12.9	13.0	13.0	11.2	11.2	11.2	11.3	11.4	11.4	11.5
5,0°	14.7	14.7	14.8	14.8	14.7	14.7	11.9	11.8	11.7	11.7	11.7	11.7	11.7
7,5°	39.0	37.4	35.6	34.8	34.2	34.2	17.5	15.5	14.4	13.7	13.3	13.0	12.8
10,0°	124.0	124.4	124.8	126.6	126.9	127.5	84.4	70.3	57.7	47.4	35.5	24.2	18.5
12,5°	246.0	254.7	251.6	255.6	257.6	260.2	95.4	87.2	82.6	78.8	78.4	66.0	56.6
15,0°	317.9	330.0	336.6	345.5	345.7	348.1	159.2	144.0	131.7	125.6	118.8	102.9	86.5
17,5°	375.4	374.1	366.7	360.4	356.8	360.9	185.7	169.5	141.6	121.7	102.5	92.3	84.4
20,0°	395.5	401.8	401.8	400.7	399.2	399.8	212.2	187.0	166.6	153.6	130.1	114.0	100.7
22,5°	409.0	405.4	403.4	402.4	401.8	404.0	240.9	218.4	182.5	159.4	131.3	112.2	99.7
25,0°	405.5	402.9	397.5	395.1	394.5	394.2	261.6	258.4	204.3	181.5	147.1	122.1	97.9
27,5°	385.8	383.7	382.2	382.4	385.7	387.1	284.2	259.9	222.4	188.4	150.7	133.2	104.6
30,0°	357.9	355.9	359.5	364.2	370.4	372.3	281.8	248.1	215.3	188.2	153.3	140.8	115.3
32,5°	327.6	326.9	331.0	335.5	341.6	343.5	310.5	277.5	234.4	191.9	156.4	148.3	132.1
35,0°	292.5	292.5	297.7	302.9	308.8	310.4	322.2	286.1	245.8	208.7	166.1	156.0	140.0
37,5°	261.9	262.7	265.3	266.6	268.6	269.3	332.0	297.7	251.4	208.5	163.5	150.1	136.8
40,0°	232.0	230.4	228.8	225.6	223.9	223.0	331.5	296.7	246.3	198.9	156.4	144.9	133.7
42,5°	202.0	196.9	191.4	184.6	180.9	179.5	344.0	301.1	244.5	192.0	150.2	141.1	132.1
45,0°	172.9	164.6	155.6	147.0	141.1	139.0	354.5	300.3	234.5	178.7	139.5	130.4	126.3
47,5°	147.8	136.9	126.0	116.1	109.5	107.3	350.5	288.6	218.9	160.7	125.7	119.3	119.3
50,0°	125.6	113.0	101.0	91.3	85.2	83.1	341.5	271.5	200.0	143.7	113.4	109.7	112.0
52,5°	106.5	93.4	81.4	73.1	68.0	66.3	334.0	258.1	186.5	132.3	105.1	101.4	104.0
55,0°	92.0	79.0	67.7	60.3	56.4	55.2	330.5	247.1	175.7	123.4	100.1	97.6	100.1
57,5°	79.5	67.0	57.2	51.5	48.7	48.0	332.9	238.9	166.3	117.6	97.3	95.0	96.7
60,0°	69.9	58.1	49.8	45.4	43.4	43.0	329.2	226.4	152.3	109.5	93.7	93.5	94.9
62,5°	60.4	50.0	43.6	40.6	39.2	39.1	322.0	209.5	136.7	99.6	88.2	90.4	92.0
65,0°	53.0	44.2	39.3	37.0	36.2	36.3	312.1	193.8	121.4	90.0	81.2	85.4	87.9
67,5°	45.8	39.1	35.3	33.8	33.5	33.7	300.2	177.6	108.8	80.6	74.2	79.7	83.2
70,0°	40.5	35.3	32.5	31.4	31.3	31.7	285.4	163.9	99.6	72.9	67.7	72.6	76.1
72,5°	34.5	30.6	28.6	27.8	27.7	27.9	259.7	149.5	88.8	64.5	61.2	65.9	69.9
75,0°	30.1	27.2	25.7	25.1	25.1	25.2	226.1	131.4	78.1	56.1	53.1	57.7	61.1
77,5°	26.2	24.1	23.0	22.6	22.6	22.7	187.8	113.5	66.2	47.3	44.9	48.4	50.8
80,0°	23.4	21.7	20.9	20.6	20.5	20.5	146.7	92.4	55.9	40.1	38.3	41.1	42.2
82,5°	21.2	20.0	19.3	19.0	19.0	18.9	111.7	75.2	47.5	34.2	32.6	34.4	34.5
85,0°	19.7	18.7	18.1	17.8	17.7	17.6	82.3	58.5	39.1	28.9	27.2	28.1	27.5
87,5°	18.3	17.5	17.1	16.8	16.7	16.6	60.4	44.9	31.3	23.2	21.1	20.7	19.4
90,0°	14.7	14.7	14.7	14.7	14.8	14.8	11.8	11.2	10.6	9.9	9.3	8.7	8.1
92,5°	14.3	14.3	14.4	14.4	14.5	14.6	11.3	10.7	10.1	9.5	8.9	8.3	7.8
95,0°	13.9	14.0	14.0	14.0	14.0	14.1	10.9	10.4	9.8	9.2	8.6	8.1	7.6
97,5°	13.5	13.6	13.6	13.6	13.7	13.7	10.5	10.1	9.6	9.0	8.4	7.9	7.5
100,0°	13.2	13.2	13.3	13.3	13.3	13.3	10.3	9.8	9.3	8.8	8.3	7.8	7.4
102,5°	12.8	12.9	12.9	13.0	13.0	13.0	10.0	9.5	9.1	8.6	8.1	7.6	7.2
105,0°	12.6	12.6	12.6	12.7	12.7	12.3	9.7	9.2	8.8	8.4	7.9	7.5	7.0
107,5°	12.3	12.4	12.5	12.5	12.5	11.6	9.4	9.1	8.6	8.2	7.7	7.3	6.9
110,0°	12.1	12.1	12.2	12.2	12.2	10.6	9.2	8.8	8.4	8.0	7.6	7.2	6.8
112,5°	11.8	11.9	11.9	11.9	11.1	7.0	8.9	8.5	8.2	7.8	7.4	7.0	6.6

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	0.0	0.0
2,5°	11.6	11.7	11.9	12.0	12.1	12.3	12.3	12.4	12.5	12.6	12.5	0.1	0.2
5,0°	11.8	11.8	11.9	11.9	12.1	12.1	12.2	12.2	12.2	12.2	12.2	0.3	0.5
7,5°	12.6	12.4	12.2	12.2	12.1	12.0	11.9	11.9	11.9	11.9	11.9	0.9	1.4
10,0°	14.8	13.4	13.0	12.6	12.3	12.1	12.0	12.0	11.9	11.9	11.9	3.5	4.9
12,5°	48.6	43.4	31.2	24.5	17.6	13.9	12.6	12.1	12.0	11.9	11.9	7.1	12.0
15,0°	73.4	73.1	56.8	50.2	40.0	31.2	25.1	22.4	18.5	14.0	12.8	12.4	24.4
17,5°	81.8	74.3	58.7	57.6	51.9	49.9	47.8	44.4	41.5	38.0	38.9	17.1	41.5
20,0°	87.9	74.1	64.5	60.7	58.4	57.7	56.4	53.0	54.0	58.9	60.4	22.2	63.7
22,5°	85.8	70.5	60.5	57.4	57.6	58.6	59.3	53.6	58.8	59.3	59.1	26.0	89.6
25,0°	79.5	68.9	59.0	55.0	54.1	57.0	58.7	55.2	55.5	57.1	57.3	28.7	118.3
27,5°	80.6	65.1	59.0	57.6	58.7	61.0	60.7	54.6	53.8	55.6	55.4	31.6	149.9
30,0°	92.9	78.8	70.8	67.0	65.1	61.9	59.6	54.4	51.2	53.7	53.6	34.0	183.9
32,5°	102.2	85.8	77.6	74.8	73.6	67.3	61.5	55.4	48.5	51.6	51.5	36.5	220.4
35,0°	116.8	103.5	91.5	82.7	76.7	68.4	61.9	55.3	51.8	50.8	49.4	38.5	258.9
37,5°	116.3	105.6	95.4	87.4	80.6	72.4	64.2	55.1	51.6	50.6	50.2	39.6	298.5
40,0°	117.3	105.0	92.4	84.1	76.9	69.7	62.8	55.0	52.4	52.1	51.9	40.2	338.7
42,5°	118.3	107.3	93.9	81.5	74.7	68.9	60.7	52.2	50.2	49.5	49.0	40.8	379.5
45,0°	118.3	108.9	95.1	80.7	70.8	63.7	55.8	48.8	46.0	45.8	45.4	41.0	420.5
47,5°	114.0	106.6	95.0	78.4	66.4	58.9	51.1	45.0	41.6	40.7	41.7	40.9	461.4
50,0°	109.9	103.3	92.8	74.6	61.5	53.2	46.3	40.8	36.5	34.3	37.1	40.6	501.9
52,5°	102.8	98.0	89.3	71.5	55.8	48.1	42.0	37.0	32.3	31.9	32.8	40.6	542.5
55,0°	99.4	94.0	86.3	68.6	51.6	44.1	38.5	33.6	30.7	29.7	29.7	41.2	583.8
57,5°	95.5	90.0	82.2	65.9	47.9	41.1	35.8	31.1	28.4	27.3	26.6	42.1	625.9
60,0°	93.5	87.7	79.2	63.7	44.5	37.9	33.2	29.0	25.8	24.5	24.1	42.8	668.7
62,5°	90.7	85.3	76.7	63.1	41.1	34.6	30.4	26.9	23.6	22.9	22.0	42.8	711.5
65,0°	87.2	82.2	73.2	60.1	39.6	32.0	27.9	24.8	22.1	20.9	20.3	42.3	753.8
67,5°	82.6	77.0	68.5	58.4	37.8	29.5	25.7	22.9	20.2	19.5	18.5	40.6	794.3
70,0°	75.4	69.8	62.4	54.7	36.1	27.1	23.3	20.9	18.6	17.8	16.9	38.0	832.3
72,5°	69.0	62.0	55.0	49.2	32.5	24.2	20.7	18.6	16.5	15.8	14.9	33.1	865.4
75,0°	59.4	52.1	45.6	40.6	27.8	21.0	18.0	16.3	14.5	13.8	13.0	27.8	893.2
77,5°	48.6	41.9	36.3	32.4	23.0	17.9	15.4	14.0	12.5	11.8	11.0	22.1	915.2
80,0°	39.4	33.1	28.9	25.8	19.1	15.3	13.2	11.8	10.6	9.8	9.3	17.2	932.4
82,5°	31.6	26.5	23.3	21.0	16.0	13.0	11.2	10.0	8.9	8.2	7.8	13.3	945.7
85,0°	24.8	20.8	18.5	16.8	13.3	10.9	9.3	8.3	7.5	6.7	6.5	10.3	956.0
87,5°	17.3	14.8	13.3	12.1	10.2	8.9	7.9	7.0	6.3	5.6	5.5	7.9	963.9
90,0°	7.5	6.9	6.3	5.8	5.3	4.9	4.5	4.2	4.0	3.6	3.5	2.9	966.8
92,5°	7.2	6.7	6.2	5.6	5.2	4.8	4.5	4.2	3.9	3.6	3.5	2.8	969.6
95,0°	7.0	6.6	6.1	5.6	5.2	4.8	4.5	4.2	3.9	3.6	3.5	2.7	972.4
97,5°	7.0	6.5	6.0	5.6	5.1	4.8	4.5	4.2	3.9	3.7	3.6	2.7	975.0
100,0°	6.9	6.4	6.0	5.6	5.2	4.9	4.6	4.3	4.0	3.8	3.6	2.6	977.6
102,5°	6.8	6.3	5.9	5.5	5.1	4.9	4.6	4.3	4.1	3.9	3.7	2.5	980.1
105,0°	6.6	6.3	5.8	5.5	5.1	4.9	4.6	4.3	4.1	3.9	3.6	2.4	982.5
107,5°	6.5	6.2	5.7	5.4	5.0	4.8	4.6	4.3	4.1	3.9	3.5	2.3	984.9
110,0°	6.4	6.1	5.7	5.4	5.0	4.8	4.6	4.3	4.1	3.8	2.9	2.3	987.1
112,5°	6.3	5.9	5.6	5.3	4.9	4.7	4.5	4.3	4.1	3.4	2.1	2.1	989.3

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.0	9.3	9.5	9.8	10.0	10.2	10.4	10.5	10.7	10.9	11.1	11.2	11.4
117,5°	8.5	8.9	9.1	9.4	9.7	9.9	10.1	10.2	10.4	10.5	10.7	10.9	11.1
120,0°	8.1	8.4	8.6	8.9	9.1	9.3	9.5	9.7	9.8	10.0	10.2	10.4	10.5
122,5°	7.0	7.4	7.7	7.9	8.1	8.3	8.4	8.5	8.7	8.9	9.1	9.1	9.3
125,0°	5.5	5.6	5.8	6.0	6.1	6.3	6.3	6.4	6.5	6.7	6.8	6.9	7.0
127,5°	3.6	3.7	3.8	3.9	3.9	4.0	4.0	4.0	4.1	4.1	4.2	4.2	4.2
130,0°	2.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.6	2.6	2.6	2.6	2.7
132,5°	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	2.2
135,0°	2.0	2.0	2.0	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8	1.8
137,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.3	1.3	1.3
140,0°	1.2	1.2	1.1	1.2	1.1	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8
142,5°	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	11.5	11.6	11.7	11.7	9.5	3.5	8.6	8.3	7.9	7.6	7.2	6.8	6.4
117,5°	11.2	11.3	11.4	11.4	8.4	3.4	8.3	7.9	7.6	7.2	6.9	6.5	6.1
120,0°	10.6	10.7	10.8	10.9	7.0	2.8	7.7	7.4	7.1	6.8	6.4	6.1	5.7
122,5°	9.5	9.6	9.7	9.7	6.0	2.6	6.8	6.5	6.3	6.0	5.6	5.4	5.1
125,0°	7.1	7.2	7.2	7.1	4.4	2.1	5.2	4.9	4.8	4.5	4.3	4.2	3.9
127,5°	4.3	4.3	4.3	4.2	2.7	1.6	3.5	3.3	3.2	3.1	3.0	2.8	2.8
130,0°	2.7	2.7	2.7	2.5	1.7	1.3	2.5	2.5	2.4	2.4	2.3	2.3	2.2
132,5°	2.2	2.2	2.2	2.0	1.4	1.1	2.2	2.2	2.1	2.1	2.1	2.1	2.1
135,0°	1.8	1.8	1.8	1.5	1.2	1.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8
137,5°	1.3	1.3	1.3	1.1	0.8	0.8	1.5	1.5	1.5	1.5	1.5	1.5	1.5
140,0°	0.8	0.8	0.8	0.7	0.6	0.6	1.2	1.1	1.1	1.1	1.1	1.1	1.1
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9	0.9	0.9	1.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.1	5.7	5.5	5.1	4.9	4.6	4.4	4.2	4.0	3.0	1.6	2.0	991.3
117,5°	5.7	5.5	5.1	4.8	4.5	4.3	4.1	3.8	3.6	2.7	1.6	1.9	993.2
120,0°	5.4	5.1	4.8	4.5	4.2	4.0	3.8	3.6	3.4	2.3	1.6	1.7	994.9
122,5°	4.8	4.5	4.2	4.0	3.7	3.5	3.3	3.2	2.9	2.1	1.6	1.5	996.4
125,0°	3.7	3.5	3.3	3.1	2.8	2.7	2.6	2.4	2.1	1.7	1.4	1.1	997.5
127,5°	2.7	2.5	2.4	2.3	2.2	2.1	2.0	1.9	1.7	1.4	1.3	0.7	998.2
130,0°	2.2	2.1	2.0	1.9	1.8	1.8	1.7	1.6	1.4	1.3	1.3	0.5	998.7
132,5°	2.0	1.9	1.9	1.8	1.7	1.7	1.6	1.5	1.4	1.2	1.3	0.4	999.1
135,0°	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.2	1.2	0.3	999.4
137,5°	1.5	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.1	1.0	1.0	0.2	999.7
140,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.2	999.9
142,5°	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425LF14H + 5XA54000XSA EAN: 4058352836651 + 4058352161326	LP number 59289_21
------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1070	10.0	10.4	10.2
95	241	252	1015	9.5	9.9	9.7
90	229	250	965	9.0	9.3	9.2
85	216	248	910	8.5	8.8	8.6
80	203	246	855	8.0	8.3	8.2
75	190	243	800	7.6	7.7	7.6
70	178	241	750	7.1	7.3	7.2
65	165	238	695	6.6	6.8	6.7
60	152	235	640	6.1	6.4	6.2
55	140	232	590	5.7	5.9	5.8
50	127	229	535	5.3	5.5	5.4
45	114	225	480	4.8	5.0	4.9
40	102	221	430	4.4	4.6	4.5
35	89	216	375	4.0	4.1	4.0
30	76	210	320	3.6	3.7	3.6
30	75	209	316	3.5	3.7	3.6