




Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1660 lm Power consumption = 12.6 W Luminous efficacy = 131.7 lm/W	serial documentation 16.01.2023





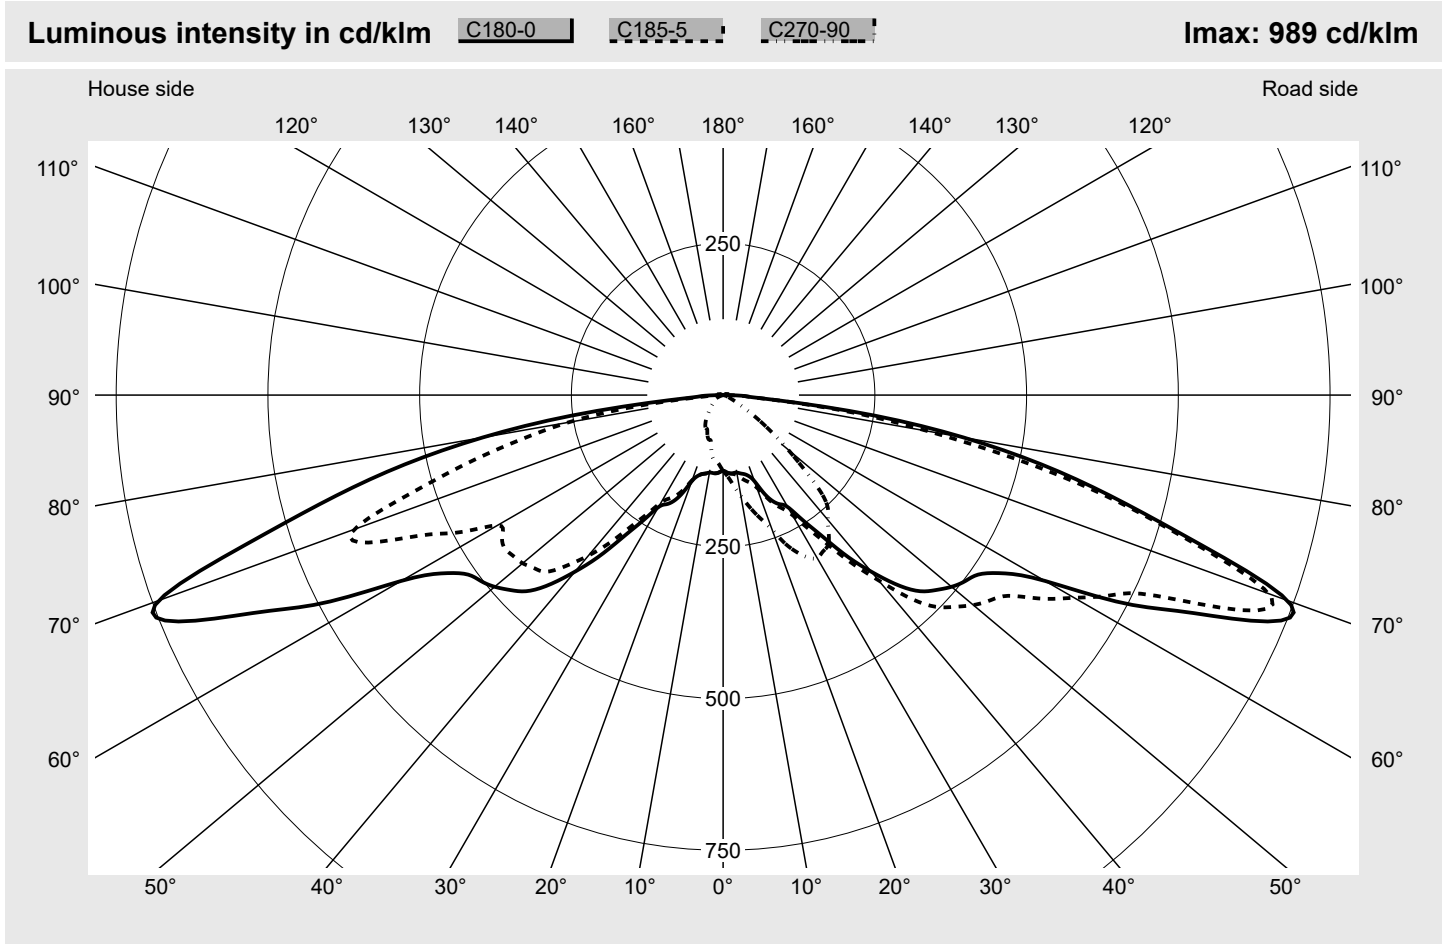


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	989.5
Imax 80°	402.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
---	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

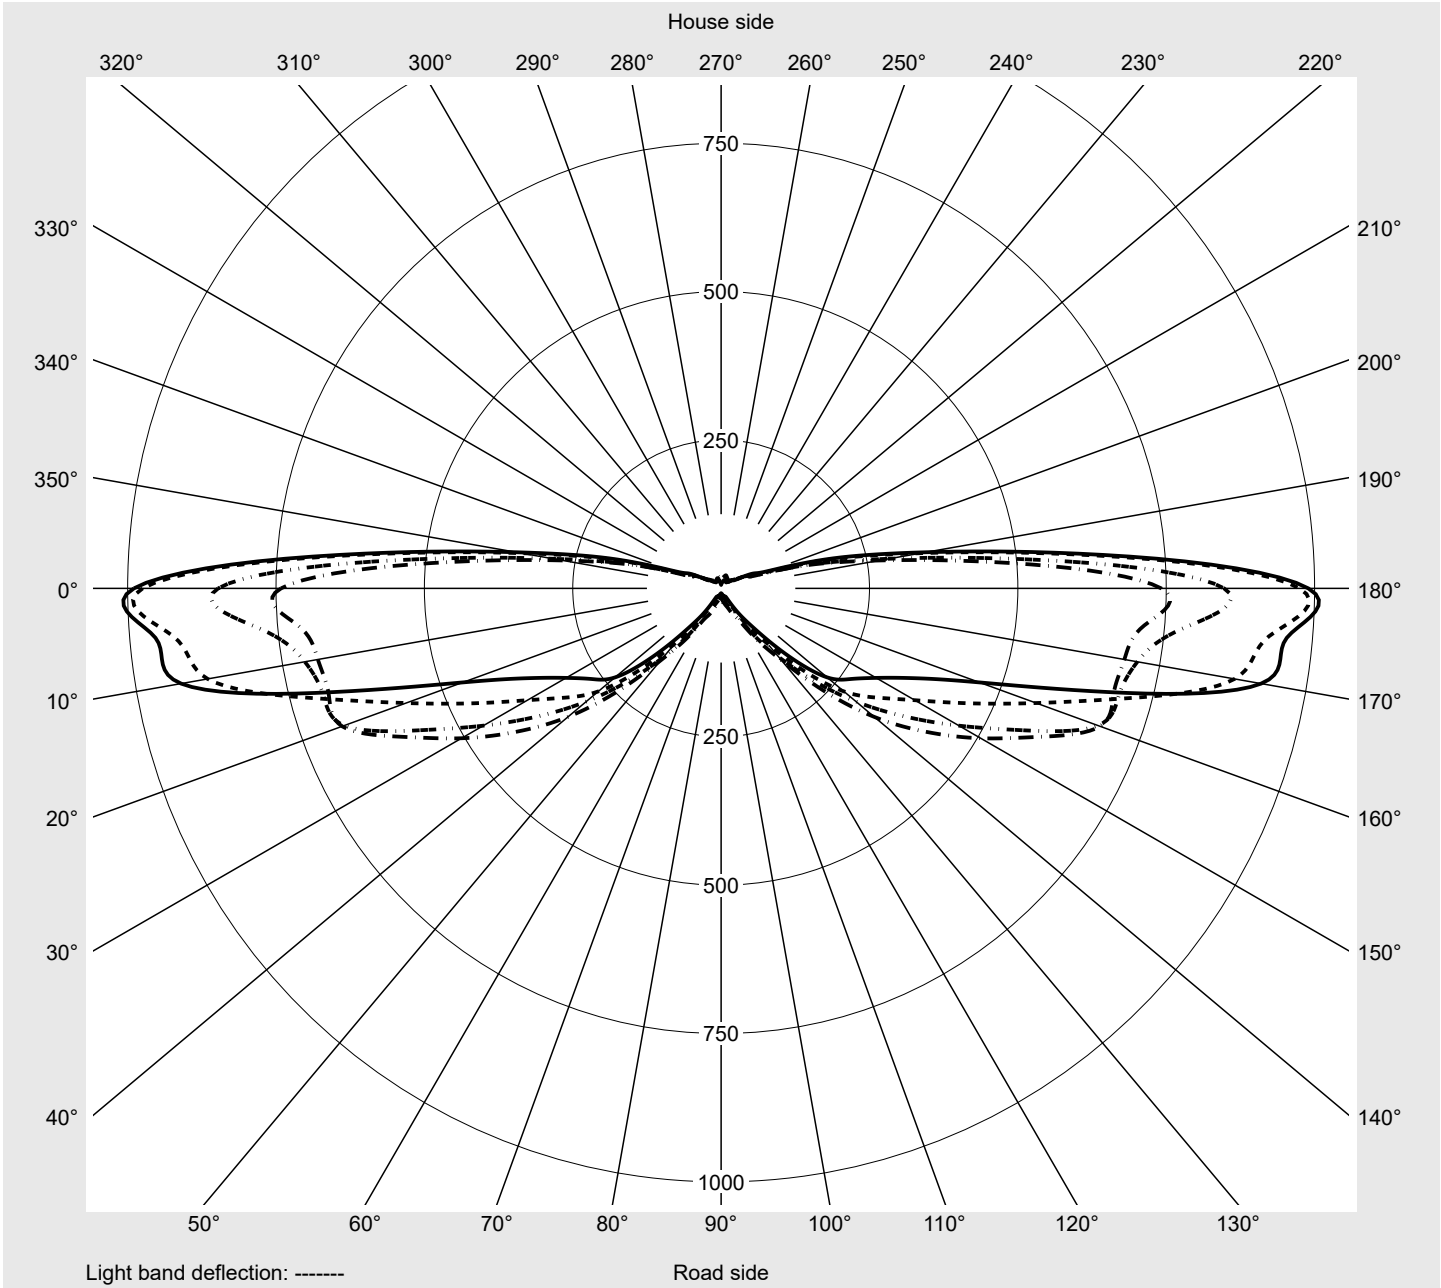

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	127.0	126.9	126.7	127.1	127.5	127.3	127.1	128.3	129.5	129.7	130.1	130.6	131.2
5,0°	129.4	129.7	129.9	131.6	133.3	133.8	134.2	136.5	138.5	139.4	140.0	140.9	141.8
7,5°	129.5	131.2	133.6	138.7	143.9	146.8	149.1	151.9	154.4	155.9	156.8	157.5	158.1
10,0°	129.7	134.2	139.4	146.6	153.6	158.3	162.1	165.8	169.0	171.3	173.3	173.9	174.6
12,5°	132.2	140.4	148.4	155.8	162.3	167.0	171.3	176.3	181.1	185.3	189.4	189.9	190.5
15,0°	134.8	146.4	156.9	164.5	170.7	176.6	182.2	188.1	194.0	199.8	205.5	206.6	207.7
17,5°	139.8	152.1	163.1	170.1	176.2	184.1	192.2	199.8	207.4	215.7	222.8	226.3	228.6
20,0°	151.0	162.2	172.4	179.8	187.1	197.9	208.5	215.8	222.4	230.5	237.9	242.4	245.9
22,5°	174.4	179.0	184.6	194.4	206.6	220.1	234.5	236.8	239.6	243.7	248.6	253.7	259.0
25,0°	192.5	197.2	200.3	212.0	224.9	242.0	260.4	258.9	257.4	259.0	261.2	265.2	269.7
27,5°	202.8	210.3	217.6	227.2	238.5	251.8	265.9	270.3	274.3	276.8	278.7	280.3	281.7
30,0°	213.1	228.0	242.7	251.7	258.7	264.6	271.4	282.3	294.5	293.7	292.8	288.0	283.7
32,5°	244.6	260.4	276.7	281.4	286.1	286.2	286.4	306.4	326.3	316.5	305.5	289.8	274.8
35,0°	282.9	300.1	316.1	317.6	319.2	314.0	308.8	326.9	345.1	329.2	310.9	285.5	257.6
37,5°	333.9	349.8	361.3	359.3	357.4	348.9	340.5	341.1	341.8	326.7	305.4	265.9	220.2
40,0°	379.9	398.5	411.0	406.7	402.4	389.4	375.8	360.7	343.6	326.1	299.9	252.8	198.4
42,5°	423.6	452.2	475.0	468.4	461.7	442.8	420.4	388.6	352.5	315.2	277.3	240.7	204.4
45,0°	456.8	492.9	524.2	518.3	512.3	487.3	457.2	413.0	362.6	308.3	258.7	224.8	201.4
47,5°	475.5	516.4	551.6	551.7	551.9	521.1	484.9	433.5	374.3	306.8	245.7	210.0	186.6
50,0°	491.4	538.2	578.7	582.9	587.1	549.7	507.2	451.2	386.1	306.4	233.6	193.5	167.9
52,5°	503.2	555.2	600.4	609.4	618.4	574.3	526.5	470.9	404.4	312.6	225.5	175.0	141.6
55,0°	514.9	576.5	631.8	638.3	644.8	591.1	535.5	478.3	409.9	308.7	211.5	155.7	119.1
57,5°	546.5	624.5	690.5	680.1	669.8	598.7	528.8	467.0	396.4	287.5	185.0	133.5	103.0
60,0°	612.4	667.9	723.5	703.4	683.3	601.3	522.1	456.0	382.9	270.8	166.0	114.7	85.6
62,5°	741.6	715.8	690.0	684.7	679.5	591.9	505.0	421.3	336.9	242.9	158.3	106.2	64.7
65,0°	847.5	779.9	712.2	694.0	675.7	566.2	462.6	375.5	296.7	219.8	150.6	96.0	46.7
67,5°	974.7	926.6	878.5	713.8	564.9	457.9	376.9	321.0	270.1	194.9	121.9	73.7	32.8
70,0°	989.5	956.7	924.0	674.9	463.3	357.9	301.7	266.3	233.4	162.9	91.8	51.1	19.0
72,5°	831.9	816.0	800.1	583.1	366.1	295.6	234.6	206.1	179.1	118.9	59.9	32.6	14.6
75,0°	681.5	667.1	652.6	470.2	287.8	232.2	183.0	156.1	129.7	81.8	27.9	19.4	11.0
77,5°	548.6	506.8	451.2	346.8	243.9	193.2	158.6	118.0	80.3	48.7	19.3	14.0	8.7
80,0°	402.4	343.4	286.5	233.7	187.8	156.1	126.6	84.0	44.9	25.8	12.7	9.5	6.7
82,5°	236.3	206.9	176.9	143.8	113.5	94.6	77.5	52.1	28.7	17.2	9.4	7.2	5.2
85,0°	70.2	68.8	67.3	53.3	39.3	39.7	40.0	27.0	15.8	10.1	6.1	4.8	3.6
87,5°	35.1	34.4	33.7	26.6	19.6	17.6	15.0	10.4	5.9	3.8	2.3	1.8	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	131.1	130.9	130.9	130.9	131.4	131.9	126.9	126.8	126.1	125.5	125.9	126.3	126.8
5,0°	141.5	141.3	141.2	141.1	141.4	141.8	129.1	128.6	127.9	127.1	127.7	128.4	128.2
7,5°	157.8	157.4	157.6	157.8	156.3	154.8	129.6	129.6	129.5	129.3	130.9	132.4	129.8
10,0°	174.4	174.2	173.9	173.5	171.2	169.0	130.3	130.9	131.7	132.5	132.9	133.3	129.2
12,5°	191.4	192.5	190.0	187.6	185.8	184.3	132.5	132.7	134.6	136.6	133.1	128.7	122.0
15,0°	208.6	209.6	205.9	202.3	201.4	200.5	134.6	134.4	137.9	141.3	133.2	126.0	121.3
17,5°	227.3	225.9	221.2	216.4	216.5	216.6	139.7	139.6	143.5	147.3	135.2	123.1	136.0
20,0°	243.2	240.3	236.8	233.2	234.6	236.0	149.3	147.6	150.0	152.3	139.2	126.0	144.7
22,5°	255.9	252.7	253.2	253.7	258.5	263.4	167.4	159.8	158.4	156.9	150.7	144.4	150.0
25,0°	266.4	263.2	268.7	274.2	279.5	284.8	182.5	171.8	164.9	159.3	153.9	149.1	145.3
27,5°	279.5	277.3	278.7	280.0	290.8	301.5	192.1	180.4	169.0	157.3	144.5	132.5	124.7
30,0°	280.8	278.3	282.1	285.9	297.9	309.9	204.4	194.7	177.5	157.5	136.4	117.1	105.2
32,5°	265.9	258.9	270.2	281.7	293.6	305.8	231.5	215.7	189.9	160.5	129.5	102.7	89.7
35,0°	249.1	240.7	259.9	277.5	290.3	301.7	264.1	240.1	204.4	164.7	127.2	89.9	79.7
37,5°	221.8	223.5	244.4	263.2	275.5	285.6	306.6	270.5	223.9	172.9	123.8	74.6	67.8
40,0°	203.1	207.9	226.8	244.2	257.0	268.4	345.3	299.3	239.5	176.3	121.8	69.1	61.7
42,5°	201.2	197.9	209.1	221.7	238.2	256.0	381.0	325.6	248.6	172.7	120.2	83.0	62.5
45,0°	189.2	181.7	186.8	191.9	211.1	230.3	411.6	352.0	259.0	169.0	119.6	88.2	65.7
47,5°	170.0	157.1	152.5	147.9	164.8	181.6	422.2	353.0	248.0	149.8	105.3	81.5	60.8
50,0°	146.6	130.9	119.6	110.2	124.7	139.2	431.1	353.9	248.2	131.8	100.7	72.8	54.5
52,5°	116.3	98.9	87.1	77.9	90.5	103.0	435.6	350.8	238.4	115.6	86.2	60.3	45.3
55,0°	92.1	74.1	62.4	53.8	63.4	73.0	439.5	347.7	228.5	99.2	72.5	49.5	37.7
57,5°	77.0	58.9	48.1	40.5	44.9	49.2	431.5	306.1	191.4	78.2	58.5	38.8	32.3
60,0°	61.9	46.2	36.8	30.3	30.9	31.5	429.1	264.5	155.8	65.7	49.2	32.6	28.1
62,5°	49.8	36.7	29.4	24.0	22.9	21.8	489.6	270.9	151.9	66.0	48.8	34.0	26.1
65,0°	37.0	28.3	22.5	18.6	16.3	14.7	546.3	287.4	155.7	66.3	49.2	34.1	25.5
67,5°	26.6	20.9	16.7	13.7	12.1	11.0	635.2	341.7	186.3	76.8	54.4	32.0	24.6
70,0°	17.0	14.9	12.3	9.9	8.9	8.2	646.5	350.5	195.4	87.3	59.0	30.7	23.7
72,5°	12.4	10.4	8.9	7.6	7.1	6.6	541.4	290.6	159.2	67.5	48.8	32.7	24.1
75,0°	8.9	7.1	6.2	5.6	5.4	5.2	439.7	231.4	123.8	49.7	39.9	30.9	23.8
77,5°	7.0	5.5	4.7	4.2	3.9	3.7	344.9	171.2	87.0	32.7	27.6	22.8	18.7
80,0°	5.1	4.1	3.4	3.0	2.8	2.6	258.9	115.4	67.6	19.9	17.9	16.0	14.2
82,5°	4.0	3.2	2.6	2.2	2.0	1.9	151.3	66.3	39.6	12.8	11.7	10.8	10.3
85,0°	2.8	2.2	1.7	1.5	1.3	1.2	43.7	17.3	12.2	7.2	6.8	6.4	6.5
87,5°	1.0	0.8	0.7	0.6	0.5	0.5	21.9	8.7	5.7	2.7	2.5	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	0.2	0.2
2,5°	127.2	125.8	124.4	123.3	122.1	120.5	119.0	118.1	117.5	117.1	116.9	1.5	1.7
5,0°	128.1	126.3	124.3	121.4	118.6	116.5	114.7	113.2	111.9	111.2	110.6	3.1	4.8
7,5°	127.0	123.7	120.0	116.4	112.7	112.6	112.4	110.5	108.6	108.6	108.5	4.9	9.7
10,0°	124.9	120.3	115.8	112.0	108.5	109.2	110.0	107.5	105.2	103.7	102.4	6.7	16.4
12,5°	114.6	116.9	119.2	112.6	106.6	102.8	99.8	96.1	92.9	91.4	90.3	8.6	25.0
15,0°	117.6	120.0	122.5	113.4	104.8	97.8	91.6	86.0	80.6	79.4	78.2	10.7	35.8
17,5°	148.9	131.4	115.8	105.4	97.9	92.3	87.9	83.2	78.7	77.8	77.0	13.1	48.9
20,0°	163.4	134.0	109.1	96.8	90.1	85.0	81.7	78.8	76.7	75.2	73.9	15.6	64.5
22,5°	155.6	128.1	104.0	90.2	79.8	75.5	71.8	69.9	68.6	68.3	68.1	18.4	82.9
25,0°	141.8	117.6	96.2	81.8	72.0	66.1	62.0	61.3	60.5	61.4	62.2	21.2	104.0
27,5°	116.0	99.6	83.3	74.1	68.0	63.2	59.2	59.4	59.6	60.5	61.3	23.6	127.6
30,0°	95.5	83.3	72.6	67.1	63.5	60.0	56.8	57.8	58.8	58.8	58.8	26.0	153.7
32,5°	81.8	72.5	65.0	60.7	58.2	56.4	55.0	55.0	55.0	54.5	54.0	28.7	182.4
35,0°	70.4	63.1	57.7	55.0	53.4	53.3	53.2	51.9	50.8	49.8	48.8	31.6	214.0
37,5°	61.4	55.7	50.2	49.8	49.4	48.1	47.1	46.5	46.2	44.4	42.5	34.2	248.2
40,0°	54.7	49.2	44.3	44.7	45.2	43.5	41.9	41.5	41.1	39.1	37.2	37.2	285.4
42,5°	51.9	45.1	40.7	40.4	39.9	39.1	37.9	36.1	34.1	33.6	33.2	40.8	326.2
45,0°	48.4	42.9	37.4	36.5	35.7	35.1	34.6	31.8	29.0	29.2	29.4	43.8	370.0
47,5°	43.9	39.3	34.7	33.6	32.5	32.3	32.1	29.2	26.3	25.9	25.6	45.2	415.2
50,0°	39.3	35.4	31.5	30.7	29.8	29.9	30.0	27.1	24.2	23.3	22.5	46.6	461.8
52,5°	34.0	30.7	27.5	27.5	27.4	28.0	28.6	25.5	22.9	21.4	20.3	47.5	509.2
55,0°	29.6	26.8	24.0	24.7	25.5	26.4	27.4	24.5	21.8	19.9	18.2	48.2	557.5
57,5°	26.7	23.4	20.9	22.8	24.4	25.6	26.7	23.9	21.2	18.7	16.2	48.7	606.2
60,0°	24.0	21.0	18.4	20.7	22.9	24.5	25.9	23.3	20.5	17.4	14.3	49.2	655.4
62,5°	21.5	18.4	16.3	18.5	20.6	22.1	23.4	20.9	18.5	16.0	13.6	50.0	705.4
65,0°	19.0	16.9	14.7	16.6	18.4	19.6	20.7	18.3	16.0	14.4	13.0	51.1	756.5
67,5°	18.4	15.5	13.7	15.1	16.3	17.3	18.2	15.5	13.0	11.1	9.3	52.9	809.3
70,0°	17.7	14.9	13.2	13.5	13.8	14.3	14.9	12.2	9.7	7.8	6.1	50.7	860.0
72,5°	18.0	15.7	13.6	12.0	10.8	10.2	9.8	7.8	6.1	4.6	3.2	42.6	902.6
75,0°	18.4	15.3	13.2	10.3	7.8	6.7	5.8	4.1	2.4	1.3	0.4	34.3	936.9
77,5°	15.5	13.5	11.9	9.5	7.1	5.3	3.8	2.5	1.5	0.8	0.2	26.3	963.2
80,0°	12.5	11.3	9.9	8.1	6.1	3.9	1.7	1.2	0.6	0.3	0.0	18.8	982.0
82,5°	9.6	8.2	6.6	5.4	4.3	2.9	1.3	0.8	0.4	0.2	0.1	11.5	993.5
85,0°	6.6	5.1	3.8	3.2	2.7	1.8	0.9	0.5	0.3	0.2	0.2	4.4	997.9
87,5°	2.5	1.9	1.4	1.2	1.0	0.7	0.3	0.2	0.1	0.1	0.1	2.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C41E08CE EAN: 4058352583425	LP number 58063_123
---	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1660	12.6	12.9	12.8
95	241	252	1575	12.0	12.3	12.2
90	229	250	1497	11.4	11.7	11.6
85	216	248	1412	10.8	11.0	10.9
80	203	246	1327	10.1	10.4	10.2
75	190	243	1242	9.6	9.8	9.7
70	178	241	1163	9.0	9.2	9.1
65	165	238	1078	8.4	8.6	8.5
60	152	235	993	7.8	8.0	7.9
55	140	232	915	7.3	7.5	7.4
50	127	229	830	6.8	6.9	6.8
45	114	225	745	6.2	6.3	6.2
40	102	221	667	5.7	5.8	5.8
35	89	216	582	5.1	5.2	5.2
30	76	210	497	4.6	4.7	4.6
25	63	203	412	4.1	4.1	4.1
20	51	195	333	3.3	3.4	3.4
16	40	186	261	2.7	2.8	2.8