


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 7490 lm Power consumption = 58.6 W Luminous efficacy = 127.8 lm/W	serial documentation 11.02.2022



Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 975 cd/klm**

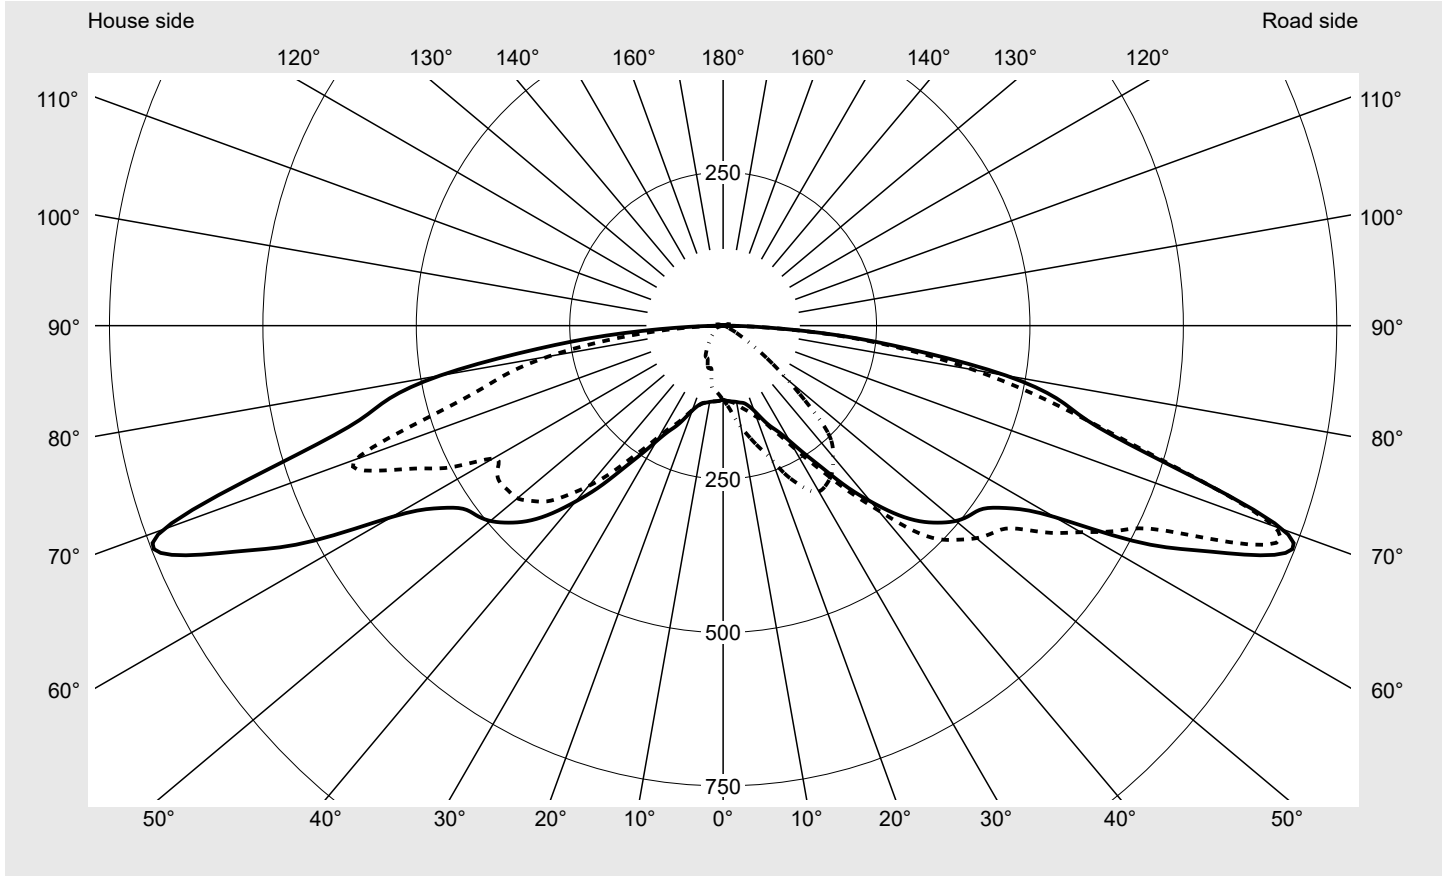

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	970.0
Imax 80°	468.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
--	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

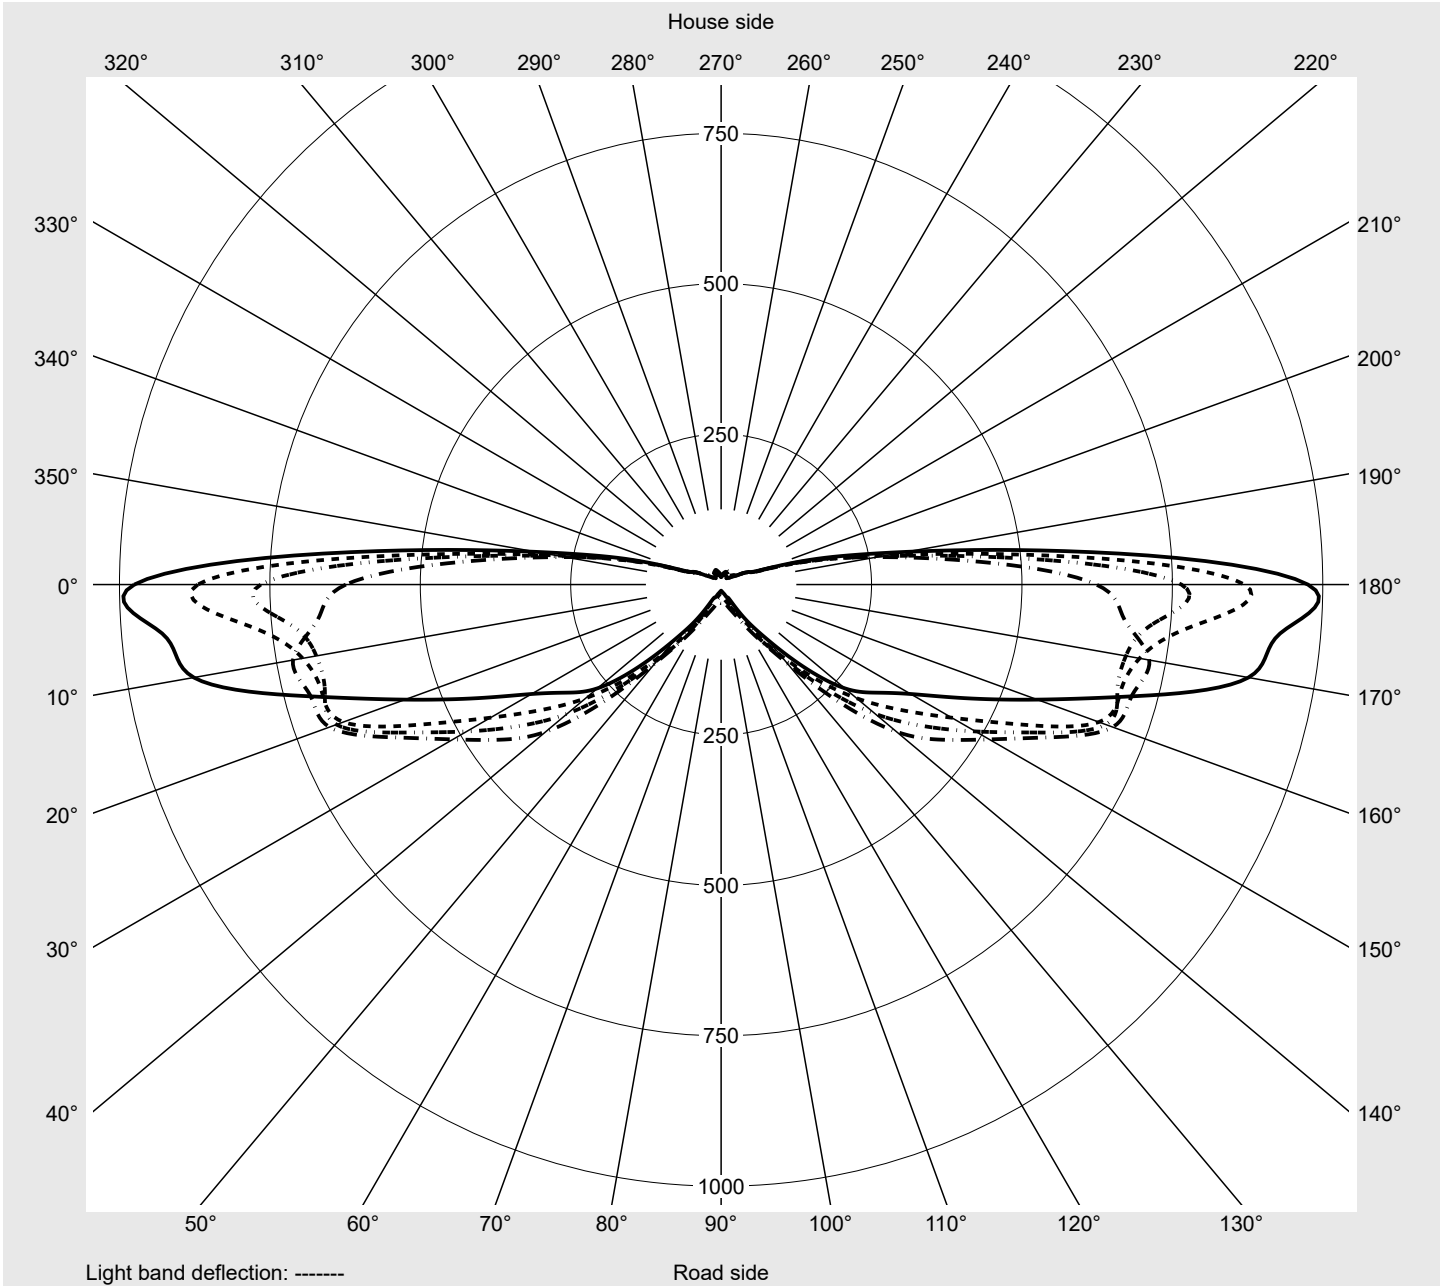

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	122.3	122.5	122.6	123.2	123.7	123.4	123.1	123.4	123.7	124.7	125.7	126.5	127.1
5,0°	123.7	124.0	124.3	125.4	126.6	128.2	129.7	130.6	131.5	133.0	134.7	136.1	137.1
7,5°	124.7	126.5	128.8	133.3	138.0	141.2	143.7	145.6	147.0	148.2	149.3	150.9	152.7
10,0°	126.2	130.4	135.0	141.5	147.9	152.4	156.1	159.3	161.9	163.8	165.3	167.1	168.6
12,5°	128.5	136.5	143.9	149.9	155.1	160.1	165.1	170.7	176.1	180.5	184.4	184.5	184.6
15,0°	130.7	142.2	152.4	158.4	163.4	169.3	175.7	182.8	189.8	195.8	201.5	201.5	201.6
17,5°	136.9	149.0	159.7	166.0	171.2	178.3	185.9	193.8	201.6	209.1	215.4	218.9	221.5
20,0°	147.2	157.9	167.8	175.4	182.7	192.3	201.7	209.0	215.6	222.8	229.4	234.3	238.7
22,5°	163.1	166.7	172.6	184.8	199.0	212.3	225.7	228.8	232.4	237.4	242.9	248.6	254.3
25,0°	180.1	183.6	186.3	201.4	216.7	233.0	249.6	250.1	250.6	254.1	257.7	261.5	265.5
27,5°	195.0	202.5	211.1	222.8	234.9	245.6	255.3	263.7	271.6	274.1	276.7	275.9	274.9
30,0°	217.4	229.1	240.4	248.8	256.5	258.7	260.9	276.1	291.2	290.9	290.7	282.9	275.1
32,5°	248.0	261.1	273.7	276.3	278.7	281.0	283.2	296.0	308.8	305.0	301.1	282.5	263.9
35,0°	284.4	299.2	312.1	310.8	309.6	308.8	308.1	317.2	326.4	317.0	303.5	277.7	247.7
37,5°	331.0	344.9	353.9	352.0	350.1	342.1	334.1	331.6	329.1	314.6	295.3	262.0	223.9
40,0°	374.2	392.1	403.9	400.7	397.5	381.6	365.7	351.4	334.7	312.8	284.2	244.3	200.1
42,5°	416.0	448.2	476.1	469.0	461.9	436.1	408.8	377.9	344.2	306.8	268.7	233.2	198.3
45,0°	450.1	491.0	528.9	521.1	513.4	481.0	445.7	402.1	354.4	301.8	253.4	220.1	196.6
47,5°	475.2	516.4	552.2	548.7	545.2	514.2	477.5	425.1	365.1	297.4	237.2	204.4	183.7
50,0°	495.1	538.7	575.9	576.8	577.8	542.1	500.6	443.3	376.5	295.9	223.5	186.9	164.8
52,5°	507.3	554.5	593.7	603.7	613.8	565.0	513.8	459.3	394.8	302.7	215.3	165.9	133.8
55,0°	519.6	575.8	624.0	634.5	645.0	582.4	520.6	465.7	401.7	301.3	203.9	146.6	109.0
57,5°	553.9	627.9	687.7	682.8	677.8	595.6	517.6	457.2	391.1	286.3	185.8	129.4	93.7
60,0°	623.7	673.2	722.6	707.6	692.7	600.9	514.7	449.6	380.6	273.4	171.3	113.5	77.7
62,5°	765.0	724.1	683.2	681.8	680.4	582.0	488.3	410.0	334.1	244.9	162.1	106.3	59.2
65,0°	869.8	788.1	706.3	687.2	668.1	550.6	442.6	362.9	293.8	220.9	152.9	96.0	43.0
67,5°	975.3	932.6	889.9	716.1	559.2	446.8	363.8	313.2	268.3	192.9	118.3	70.4	30.3
70,0°	970.0	955.0	939.9	679.3	458.3	349.5	293.2	261.4	232.0	159.5	86.0	46.9	17.5
72,5°	775.6	781.4	787.2	572.6	358.0	286.7	225.8	200.4	176.6	116.6	57.2	30.5	13.2
75,0°	627.2	632.9	638.6	459.6	280.7	225.1	176.3	151.1	126.7	80.5	28.3	19.1	9.8
77,5°	561.6	521.6	481.7	351.7	241.3	188.8	157.4	120.1	84.9	51.4	18.6	13.2	7.8
80,0°	468.3	413.9	354.0	271.0	194.5	158.4	131.2	85.3	43.2	23.9	11.7	8.7	6.1
82,5°	324.8	303.9	272.2	207.6	132.0	113.5	92.3	60.4	30.7	17.2	8.7	6.6	4.8
85,0°	198.9	192.4	185.9	132.3	78.7	69.1	57.4	37.8	19.3	11.0	5.8	4.5	3.4
87,5°	74.6	72.1	69.7	49.6	29.5	25.9	21.5	14.2	7.2	4.1	2.2	1.7	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	127.4	127.7	127.7	127.7	128.0	128.2	122.3	122.3	122.1	121.9	121.9	121.9	121.9
5,0°	137.7	138.1	138.1	138.1	138.3	138.5	123.5	123.4	123.4	123.5	123.6	123.7	123.0
7,5°	153.2	153.7	154.1	154.4	153.8	153.2	124.4	124.2	124.7	125.1	126.8	128.5	125.0
10,0°	169.4	170.0	169.9	169.8	168.9	167.9	125.6	124.9	126.7	128.2	129.0	129.5	125.4
12,5°	186.2	187.7	185.4	183.4	182.4	181.9	128.2	128.0	130.8	133.6	127.8	122.8	120.2
15,0°	203.1	204.5	201.3	198.0	197.7	197.3	131.6	132.5	135.5	138.4	129.3	120.2	118.1
17,5°	221.1	220.7	216.8	212.9	213.1	213.3	137.5	138.1	140.1	142.1	132.7	123.3	131.5
20,0°	237.1	235.3	232.9	230.3	231.6	232.8	146.5	145.8	146.1	146.4	137.0	127.5	145.4
22,5°	251.7	249.2	252.2	255.2	257.7	260.2	159.2	155.9	153.9	152.3	145.2	138.0	144.5
25,0°	262.6	259.7	266.6	272.9	277.9	282.5	174.3	167.8	162.7	156.9	148.6	139.5	137.4
27,5°	273.1	271.1	276.4	282.7	291.9	301.9	188.1	180.5	171.1	159.6	143.2	127.6	120.2
30,0°	273.0	270.9	278.6	287.3	299.1	311.9	208.0	197.1	181.3	162.2	137.9	115.4	103.4
32,5°	258.5	253.1	268.9	284.0	297.3	309.8	235.0	218.3	192.5	162.9	130.4	102.2	88.7
35,0°	241.8	235.9	259.7	280.8	293.6	303.6	266.3	241.9	204.7	163.6	126.6	90.2	79.4
37,5°	221.5	219.2	243.1	264.9	280.3	293.6	305.1	269.2	219.6	166.4	120.4	76.1	69.0
40,0°	201.6	203.2	224.2	244.3	262.0	278.8	341.2	295.9	233.5	168.6	117.3	69.5	62.5
42,5°	194.5	190.6	204.0	219.3	240.4	263.5	374.2	321.6	248.4	174.7	122.4	76.2	62.4
45,0°	183.0	173.7	181.1	188.4	211.6	234.8	404.7	347.2	258.7	171.4	116.1	78.6	58.3
47,5°	166.4	151.9	148.8	145.8	164.0	182.2	422.7	354.8	251.4	153.4	104.1	75.7	55.6
50,0°	143.4	127.0	116.6	108.7	123.0	137.2	437.8	362.3	255.4	136.9	101.6	70.4	51.2
52,5°	109.5	93.2	82.9	75.5	87.9	100.2	441.4	357.0	245.6	123.8	91.0	62.0	44.6
55,0°	83.7	68.1	58.1	51.2	60.7	70.1	444.3	351.7	234.7	108.3	78.5	52.6	38.0
57,5°	69.7	55.1	45.5	38.8	43.2	47.7	435.9	307.2	196.3	88.9	63.7	38.6	31.8
60,0°	55.7	43.7	35.1	29.0	29.8	30.7	432.8	262.8	155.7	69.5	50.0	30.6	27.2
62,5°	45.8	34.2	27.6	22.7	22.4	22.0	499.7	270.6	150.5	66.7	49.5	32.3	26.2
65,0°	33.9	25.8	20.7	17.3	15.0	13.3	550.6	278.5	147.6	63.8	47.3	32.8	24.3
67,5°	23.9	18.3	14.9	12.7	11.3	10.3	617.8	312.8	165.5	70.6	49.4	31.3	22.8
70,0°	15.0	12.6	10.7	9.1	8.4	7.8	636.6	347.2	190.2	77.4	53.8	30.2	23.7
72,5°	11.1	9.3	8.0	7.1	6.5	6.2	514.7	286.9	158.3	62.8	44.8	29.5	21.6
75,0°	8.2	6.8	5.9	5.3	5.0	4.8	416.2	231.8	127.1	49.1	38.4	28.8	22.2
77,5°	6.4	5.2	4.5	4.0	3.9	3.8	359.2	185.2	96.4	36.1	28.9	22.5	18.4
80,0°	4.7	3.9	3.4	2.9	2.9	2.8	288.8	136.8	67.1	24.9	20.6	16.9	14.8
82,5°	3.7	3.0	2.5	2.2	2.0	1.9	201.0	77.2	46.4	15.6	13.8	12.1	11.7
85,0°	2.6	2.1	1.7	1.4	1.2	1.1	116.7	34.5	21.4	8.3	8.0	7.7	8.1
87,5°	1.0	0.8	0.6	0.5	0.5	0.4	43.8	12.9	8.0	3.1	3.0	2.9	3.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	0.2	0.2
2,5°	121.8	120.9	120.1	119.4	118.5	117.2	115.8	115.0	114.5	114.5	114.5	1.5	1.6
5,0°	122.2	120.9	119.3	117.4	115.4	113.4	111.6	110.5	109.6	109.5	109.3	3.0	4.6
7,5°	121.7	118.7	115.9	113.2	110.9	109.7	108.9	107.8	106.8	106.3	106.0	4.7	9.3
10,0°	121.2	116.7	112.6	109.6	106.9	106.6	106.2	105.2	104.1	103.3	102.6	6.5	15.9
12,5°	118.6	117.2	115.1	110.4	105.1	100.6	96.6	93.4	90.8	89.2	88.0	8.4	24.3
15,0°	116.0	116.8	117.6	109.1	101.2	94.7	88.9	82.7	77.5	75.0	73.4	10.4	34.7
17,5°	139.7	125.7	112.7	102.6	94.6	89.1	84.7	80.1	75.7	74.2	72.8	12.7	47.4
20,0°	163.4	133.0	107.2	94.3	87.5	82.1	78.6	75.8	73.8	72.8	72.1	15.3	62.7
22,5°	151.0	124.6	101.5	87.2	78.1	72.7	69.9	67.8	66.4	66.1	65.9	17.9	80.6
25,0°	135.4	113.5	93.9	80.5	71.1	65.3	61.1	60.0	58.9	59.3	59.7	20.6	101.1
27,5°	112.9	97.6	82.4	74.1	68.4	63.2	58.5	58.2	57.9	58.1	58.4	23.2	124.3
30,0°	94.4	82.6	72.4	67.5	64.3	60.1	56.0	56.4	56.9	57.0	57.1	25.8	150.2
32,5°	80.6	71.7	64.5	60.2	57.4	55.6	54.2	53.9	53.6	52.6	51.5	28.4	178.6
35,0°	69.6	62.4	57.1	54.0	51.8	51.5	51.1	50.6	49.8	48.1	46.2	31.1	209.7
37,5°	62.1	55.8	49.6	49.0	48.3	47.0	45.4	45.3	45.2	43.0	40.7	33.7	243.4
40,0°	55.7	49.5	43.7	44.0	44.3	42.4	40.5	40.3	40.1	38.0	35.9	36.5	279.9
42,5°	50.5	44.3	40.1	39.7	39.3	37.9	36.4	34.7	33.2	32.4	31.9	40.2	320.1
45,0°	45.5	41.1	36.7	35.9	35.1	34.3	33.1	30.8	28.1	28.2	28.3	43.1	363.3
47,5°	40.8	37.2	33.6	32.5	31.4	31.1	30.9	28.2	25.4	25.3	25.1	44.7	407.9
50,0°	36.2	33.3	30.4	29.6	28.8	29.0	29.2	26.3	23.4	22.8	22.2	46.1	454.0
52,5°	31.0	28.9	26.9	27.4	27.8	28.0	28.1	25.0	22.2	20.7	19.7	46.9	500.9
55,0°	27.2	25.4	23.6	25.1	26.6	26.9	27.2	24.2	21.3	19.3	17.4	47.7	548.7
57,5°	26.0	22.8	20.6	23.0	25.1	26.0	26.6	23.8	21.0	18.3	15.6	48.6	597.2
60,0°	24.0	21.0	18.1	20.9	23.3	24.8	25.9	23.3	20.6	17.2	13.7	49.2	646.5
62,5°	20.9	18.1	16.2	18.7	21.2	21.9	22.5	20.6	18.5	16.0	13.4	49.9	696.3
65,0°	17.8	16.0	14.3	16.7	19.1	19.4	19.8	18.2	16.6	14.7	12.9	50.6	746.9
67,5°	17.5	15.6	13.7	15.6	17.2	18.1	18.7	16.9	15.1	13.7	12.4	52.1	799.0
70,0°	17.3	15.2	13.2	13.9	14.7	15.6	16.4	14.7	13.2	12.2	11.3	50.2	849.2
72,5°	17.4	14.6	13.1	11.9	10.9	11.5	12.1	11.3	10.6	10.1	9.8	41.2	890.4
75,0°	17.5	14.8	13.0	10.6	8.2	8.3	8.4	8.2	8.0	7.7	7.4	33.2	923.6
77,5°	15.5	13.1	11.1	9.0	6.9	6.2	5.6	5.2	5.0	3.9	2.9	27.2	950.8
80,0°	13.3	11.2	9.0	7.2	5.6	4.1	2.8	2.8	2.7	1.5	0.2	21.1	971.9
82,5°	11.3	8.7	6.5	5.1	4.0	2.9	1.9	1.7	1.6	0.9	0.2	15.2	987.1
85,0°	8.4	6.1	4.1	3.2	2.6	1.8	1.1	0.7	0.4	0.3	0.2	9.4	996.5
87,5°	3.1	2.3	1.6	1.2	1.0	0.7	0.4	0.3	0.2	0.2	0.1	3.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08HE EAN: 4058352583708	LP number 58290_94
--	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	7490	58.6	60.9	59.8
95	241	252	7107	55.1	57.2	56.2
90	229	250	6753	51.9	53.9	52.9
85	216	248	6369	48.6	50.4	49.5
80	203	246	5986	45.3	47.0	46.2
75	190	243	5603	42.2	43.8	43.0
70	178	241	5249	39.3	40.8	40.0
65	165	238	4866	36.2	37.7	37.0
60	152	235	4482	33.3	34.5	33.9
55	140	232	4128	30.6	31.7	31.2
50	127	229	3745	27.6	28.6	28.1
45	114	225	3362	24.8	25.6	25.2
40	102	221	3008	22.3	23.1	22.7
35	89	216	2624	19.5	20.2	19.8
30	76	210	2241	16.7	17.3	17.0
25	63	203	1858	14.1	14.6	14.4
20	51	195	1504	11.7	12.1	11.9
15	38	184	1121	9.2	9.4	9.3
14	35	181	1032	8.6	8.8	8.7