




Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65												
	<table border="0"> <tr> <td>Version</td> <td>post-top or side-entry mounting</td> </tr> <tr> <td>Optic</td> <td>asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)</td> </tr> <tr> <td>Cover</td> <td>transparent, PMMA</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 70</td> </tr> <tr> <td>Controlgear</td> <td>ECG SITECO iQ</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 8600 lm Power consumption = 58.6 W Luminous efficacy = 146.8 lm/W</td> </tr> </table>	Version	post-top or side-entry mounting	Optic	asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)	Cover	transparent, PMMA	Lamps	LED 4000 K CRI ≥ 70	Controlgear	ECG SITECO iQ	Rated values	Net luminous flux = 8600 lm Power consumption = 58.6 W Luminous efficacy = 146.8 lm/W	serial documentation 11.02.2022 
Version	post-top or side-entry mounting													
Optic	asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)													
Cover	transparent, PMMA													
Lamps	LED 4000 K CRI ≥ 70													
Controlgear	ECG SITECO iQ													
Rated values	Net luminous flux = 8600 lm Power consumption = 58.6 W Luminous efficacy = 146.8 lm/W													

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 514 cd/klm**

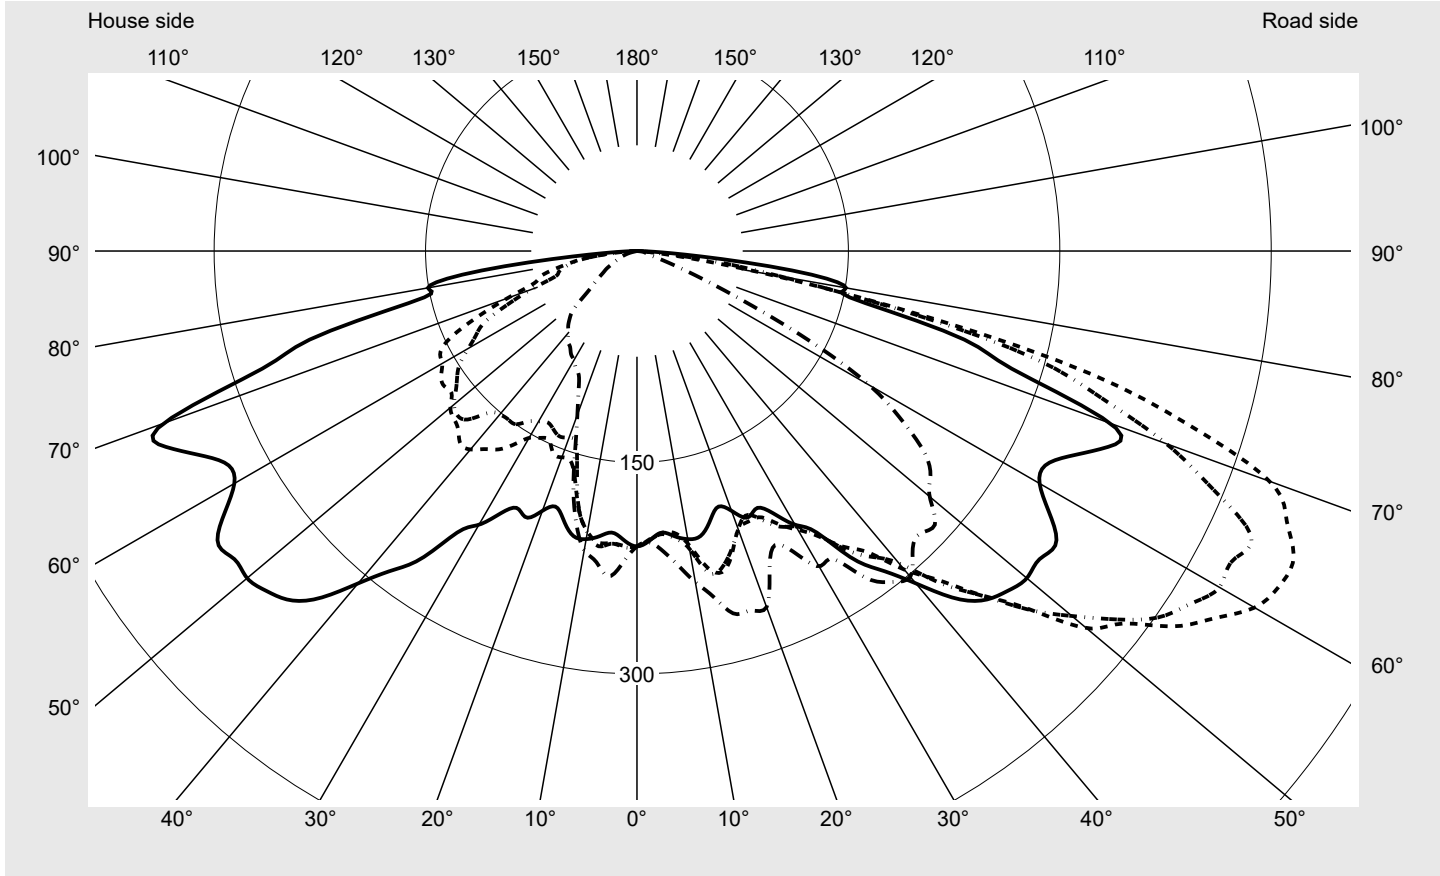

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	477.9
Imax 80°	150.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65
--	--	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

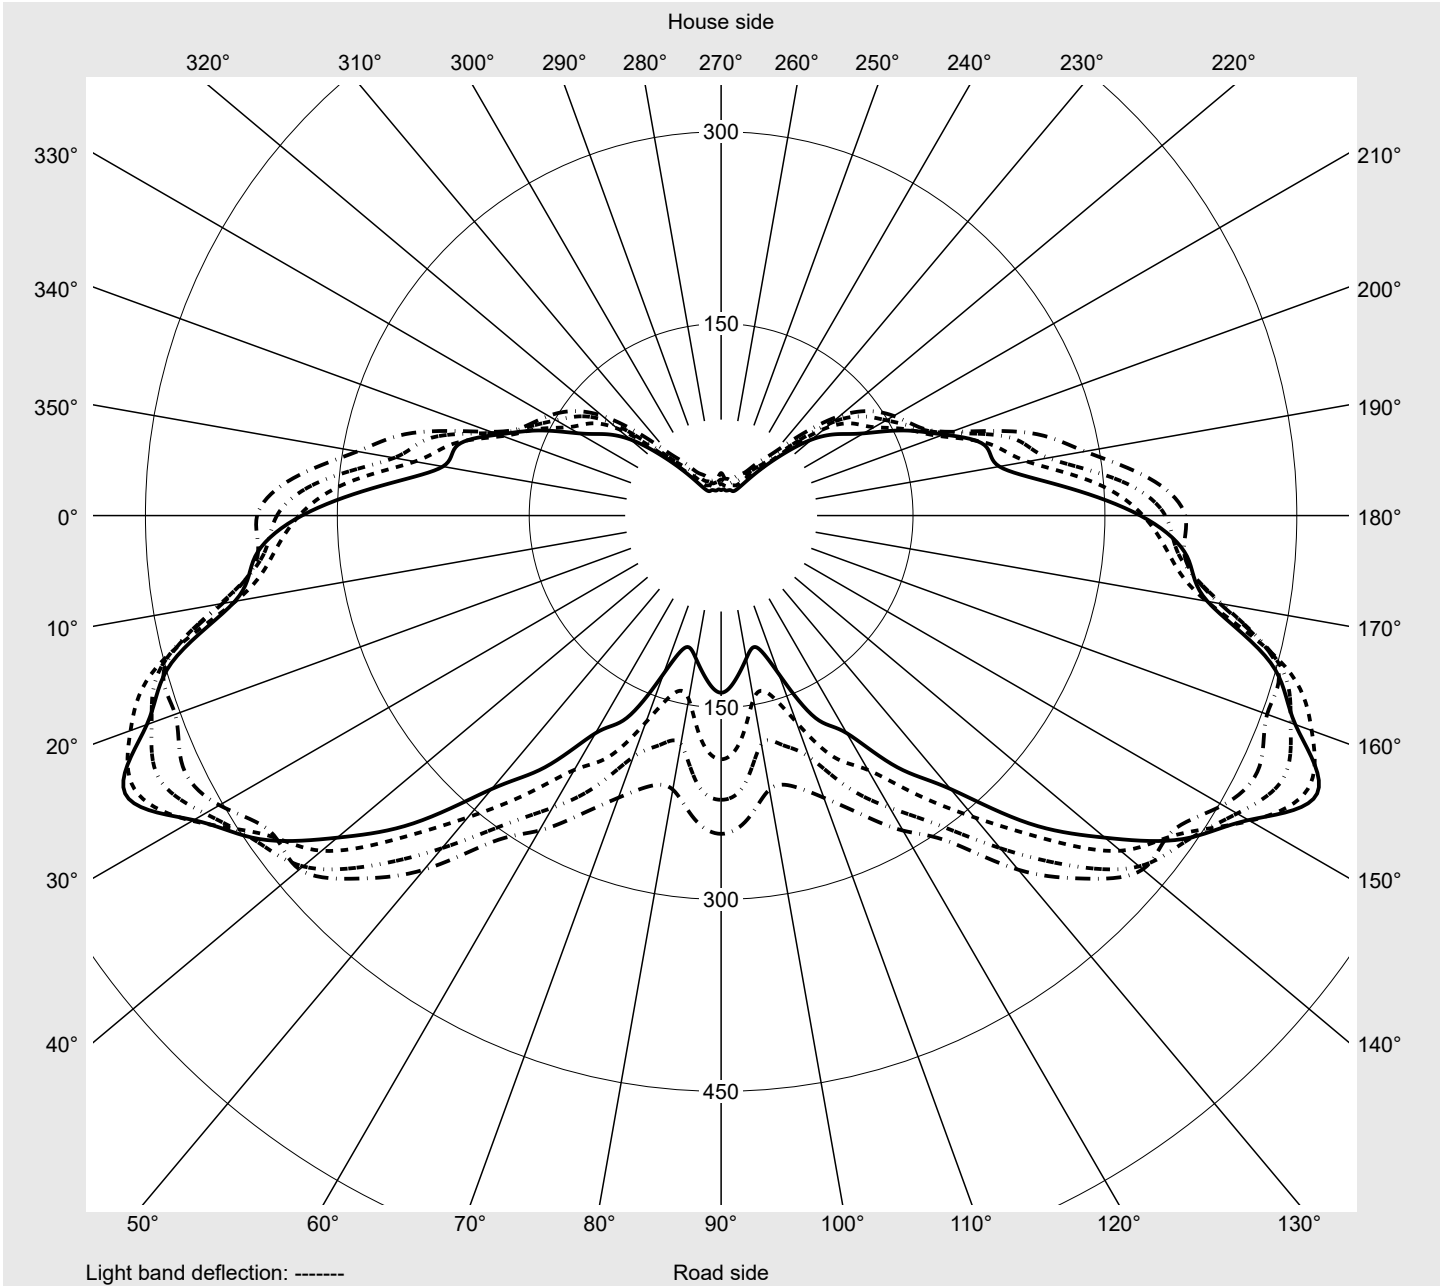

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	205.6	205.7	205.1	204.9	205.0	204.7	205.4	206.0	205.3	204.4	203.8	203.2	203.2
5,0°	200.6	200.0	200.2	201.0	201.0	200.8	201.6	203.7	204.4	207.0	208.6	208.8	209.5
7,5°	204.1	204.0	201.6	200.1	200.5	201.7	205.6	211.5	213.9	215.7	216.6	218.7	220.9
10,0°	207.6	209.2	209.7	209.8	209.4	211.5	214.5	217.2	219.6	222.1	226.6	230.1	232.8
12,5°	207.3	213.8	219.7	222.4	226.4	229.8	233.4	232.9	229.9	232.2	233.3	236.0	235.0
15,0°	199.0	200.3	211.5	229.6	237.5	235.5	232.7	228.6	224.1	226.5	229.3	229.9	235.7
17,5°	190.4	197.3	210.2	222.7	225.6	224.7	222.5	217.1	223.5	219.7	214.6	212.5	217.6
20,0°	196.1	203.0	207.3	214.6	213.8	210.1	210.1	216.7	224.8	216.2	208.8	208.6	214.3
22,5°	204.7	210.2	206.9	215.4	212.0	207.6	202.9	210.8	212.9	212.7	211.4	211.9	212.6
25,0°	201.2	207.7	211.1	218.3	214.4	208.4	210.5	217.3	217.4	220.3	221.0	220.3	222.0
27,5°	210.0	215.2	216.1	218.3	219.0	218.7	220.5	224.0	230.0	232.2	238.2	239.3	248.8
30,0°	224.2	230.6	232.5	231.7	231.8	228.4	225.6	229.7	241.6	250.9	258.1	265.1	275.3
32,5°	236.4	239.9	242.1	243.2	242.8	240.1	238.5	242.0	259.4	270.0	276.8	284.1	289.7
35,0°	266.1	266.9	261.8	256.5	252.6	256.3	258.8	263.1	271.7	283.6	290.8	306.4	310.7
37,5°	285.6	282.4	281.9	272.6	261.9	269.5	273.5	280.9	289.8	295.2	309.0	335.0	331.2
40,0°	307.8	307.6	298.3	291.3	284.3	295.0	289.2	296.4	304.1	319.2	325.8	343.3	347.7
42,5°	334.2	326.4	325.3	318.4	314.5	316.6	320.2	318.3	317.8	333.8	340.8	351.7	353.4
45,0°	349.9	346.2	344.7	343.7	341.8	345.2	345.6	339.4	342.9	358.9	350.5	347.1	349.5
47,5°	356.8	353.9	367.5	388.9	362.0	375.2	376.5	367.6	369.2	367.0	359.1	339.7	345.5
50,0°	361.1	368.7	382.5	428.7	381.0	416.2	402.8	390.6	393.2	377.3	353.6	334.3	323.6
52,5°	359.6	357.8	391.5	430.5	422.3	434.1	429.4	415.4	416.5	391.3	357.8	320.9	299.8
55,0°	362.7	363.8	395.8	449.4	454.2	464.3	452.8	430.3	430.2	401.3	361.3	311.3	284.3
57,5°	347.2	359.5	397.5	452.4	473.7	485.1	465.8	443.6	426.6	387.0	339.4	294.9	263.7
60,0°	329.9	351.7	385.3	456.5	491.3	506.0	477.3	434.9	407.6	357.1	307.9	266.0	229.6
62,5°	327.7	365.6	386.0	444.8	477.7	514.1	476.0	440.8	391.7	340.2	279.0	240.2	196.4
65,0°	342.5	392.5	389.2	425.5	456.9	514.1	481.3	416.2	364.1	317.6	257.1	222.8	161.8
67,5°	362.5	436.1	382.5	401.8	447.8	498.9	442.9	393.8	331.6	288.5	228.0	195.2	143.3
70,0°	357.4	420.3	359.9	368.3	453.9	477.9	399.8	347.8	309.6	257.3	197.9	158.9	124.3
72,5°	280.3	372.1	312.1	330.4	401.3	410.8	344.5	287.0	267.7	217.5	167.3	129.5	110.8
75,0°	237.1	318.5	240.6	282.1	301.1	327.3	288.7	220.4	187.0	164.0	134.5	116.5	98.1
77,5°	158.0	221.9	166.9	207.0	172.4	196.4	186.9	147.0	122.7	116.0	90.3	82.7	70.0
80,0°	150.6	123.0	102.1	123.8	86.4	93.9	102.8	105.1	85.9	78.7	44.1	38.5	30.3
82,5°	120.2	63.8	40.9	40.4	26.6	34.2	53.9	70.5	52.4	35.3	21.3	16.9	11.9
85,0°	49.4	23.6	13.4	9.2	7.5	9.3	11.5	16.7	14.6	10.6	10.4	8.0	6.3
87,5°	11.8	8.1	5.5	4.8	4.2	4.6	4.8	5.1	5.3	4.8	4.2	4.0	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	203.1	203.0	204.6	205.3	206.0	206.9	205.5	206.6	207.7	208.7	209.5	210.3	210.8
5,0°	209.5	210.0	210.5	212.3	214.2	213.9	201.5	202.7	202.5	204.3	208.1	208.4	207.5
7,5°	222.3	225.1	226.3	226.7	226.6	225.1	204.0	203.4	204.4	205.7	208.7	211.2	210.9
10,0°	232.0	231.2	232.4	233.6	235.5	238.6	202.7	201.4	201.3	202.7	202.3	202.6	205.2
12,5°	238.9	241.7	245.2	248.7	252.4	251.4	199.3	198.0	192.9	190.6	189.2	189.1	189.2
15,0°	236.9	243.3	249.4	258.1	262.3	266.4	194.4	191.9	184.6	178.8	169.3	164.2	160.6
17,5°	229.2	238.9	247.9	257.1	263.7	267.5	189.4	185.9	180.3	171.1	156.3	143.4	139.0
20,0°	221.0	231.2	243.0	255.2	265.6	268.8	191.0	182.0	174.2	167.5	155.8	140.7	134.8
22,5°	221.6	232.4	245.3	250.3	249.5	245.8	191.4	178.6	167.4	160.1	155.3	142.5	129.7
25,0°	228.0	237.5	241.9	238.9	237.8	230.6	192.1	174.4	168.7	155.9	147.8	139.9	126.5
27,5°	249.4	250.2	249.0	248.4	241.2	240.7	196.6	184.1	170.0	160.9	149.5	137.1	126.3
30,0°	274.3	269.2	254.3	256.1	254.8	258.3	216.4	204.4	186.6	170.7	153.1	139.5	127.1
32,5°	284.4	271.3	265.0	270.9	265.3	259.0	230.9	220.2	200.6	179.6	162.9	143.3	130.1
35,0°	305.2	293.7	290.6	292.2	285.6	283.0	265.8	250.6	220.5	193.1	171.9	150.0	132.3
37,5°	319.7	309.7	294.0	286.7	287.8	296.0	285.3	272.2	235.5	205.4	177.1	150.4	133.1
40,0°	337.7	321.9	291.1	275.9	284.7	301.7	313.3	292.7	247.2	217.3	183.8	151.3	139.1
42,5°	348.9	316.1	291.3	275.9	286.3	289.4	326.8	308.0	255.6	226.7	185.4	155.6	143.3
45,0°	352.6	315.7	285.9	274.4	284.0	283.7	347.3	328.5	269.4	236.2	179.4	168.9	149.4
47,5°	346.6	306.7	270.7	272.1	287.2	286.8	361.2	325.8	276.9	229.4	176.2	172.7	157.7
50,0°	323.6	284.0	254.7	255.4	280.5	271.1	358.8	318.5	269.0	216.6	172.8	169.4	157.1
52,5°	288.6	264.3	237.6	247.2	255.4	262.4	346.6	305.4	258.6	200.4	165.8	161.9	149.4
55,0°	257.2	234.7	219.2	217.5	238.2	248.8	335.7	288.7	249.7	191.5	167.0	155.8	142.3
57,5°	234.4	200.7	185.7	181.4	210.8	222.2	313.1	259.6	234.8	188.7	164.8	149.0	135.2
60,0°	208.2	171.9	144.2	145.7	176.3	190.5	293.5	243.1	216.8	181.7	159.6	138.1	125.5
62,5°	174.5	131.7	106.6	113.4	128.8	138.5	266.9	220.9	213.1	185.2	157.4	128.5	111.0
65,0°	137.2	94.0	76.8	79.0	87.3	81.9	252.2	222.4	206.5	180.2	146.4	119.0	100.4
67,5°	107.2	66.9	52.5	43.4	43.5	43.9	242.0	221.7	206.9	161.7	123.0	99.6	85.2
70,0°	90.4	52.1	32.8	21.8	21.0	21.8	214.0	256.9	208.7	129.3	97.7	80.3	74.0
72,5°	76.2	30.7	18.8	12.2	11.0	10.5	204.4	243.7	153.8	99.0	76.8	61.5	58.7
75,0°	60.2	19.9	12.8	9.5	8.5	8.3	180.0	179.3	126.0	89.8	71.5	57.5	49.9
77,5°	25.1	13.9	9.2	7.5	7.0	6.6	142.6	126.0	117.7	76.6	60.8	52.4	41.5
80,0°	13.4	9.4	6.7	5.7	5.4	5.4	107.1	124.7	99.0	59.9	47.4	45.6	27.2
82,5°	8.6	6.4	4.8	4.1	4.1	4.3	61.7	98.1	69.3	43.9	35.9	33.0	21.7
85,0°	5.2	4.0	3.0	2.6	2.2	2.2	35.4	45.5	27.0	19.3	18.2	15.9	11.8
87,5°	2.9	2.2	1.6	1.3	1.0	1.0	11.6	11.8	8.3	5.6	5.7	5.8	3.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	0.3	0.3
2,5°	212.0	213.1	214.4	216.5	219.1	220.0	220.3	220.4	221.1	221.3	220.8	2.5	2.8
5,0°	207.3	208.6	210.0	212.4	215.2	220.1	224.3	228.1	230.5	232.3	231.7	5.0	7.8
7,5°	207.1	207.6	207.9	208.0	210.6	214.3	217.8	219.4	220.6	222.9	222.3	7.6	15.4
10,0°	201.9	197.4	196.1	197.8	200.7	203.1	205.8	209.1	213.9	215.2	215.6	10.1	25.6
12,5°	188.7	186.8	187.2	188.9	189.0	192.0	194.9	202.2	202.9	199.9	198.5	12.7	38.2
15,0°	163.2	166.1	166.8	168.0	167.6	169.0	171.8	175.5	177.6	177.5	174.3	14.5	52.7
17,5°	142.4	145.3	148.6	146.6	142.2	141.3	142.5	140.5	139.6	141.9	145.2	15.7	68.4
20,0°	132.1	133.9	136.1	131.7	126.2	120.3	118.7	117.2	119.3	123.0	123.6	17.1	85.4
22,5°	121.6	123.3	127.5	122.6	117.2	111.3	108.1	104.4	104.1	105.1	108.4	18.6	104.0
25,0°	116.4	116.4	122.3	114.9	111.8	108.8	104.8	99.9	98.0	96.3	97.5	20.4	124.4
27,5°	113.5	110.4	106.0	104.2	104.7	100.3	99.3	95.7	92.3	93.2	93.9	22.8	147.2
30,0°	118.2	110.9	106.7	103.5	94.1	91.0	88.4	87.2	88.7	89.6	89.4	25.8	173.0
32,5°	121.5	114.0	109.5	100.2	88.8	83.6	80.0	80.0	84.3	86.3	87.0	28.8	201.9
35,0°	128.0	116.1	107.5	90.6	81.0	75.6	72.2	73.3	78.1	83.0	82.8	32.7	234.6
37,5°	127.5	116.2	104.9	90.3	73.2	71.2	67.5	68.7	74.1	79.7	80.7	36.1	270.7
40,0°	131.4	114.2	99.6	87.6	68.0	64.4	63.9	66.0	70.0	75.2	75.7	39.6	310.3
42,5°	134.7	114.2	96.0	77.4	69.2	62.4	60.4	61.5	65.2	69.3	72.3	43.1	353.4
45,0°	137.7	114.0	90.2	69.6	65.6	62.2	54.8	55.1	57.7	63.4	67.4	46.5	400.0
47,5°	135.7	108.6	82.1	66.4	62.0	58.8	49.4	45.7	48.7	56.3	60.7	49.4	449.4
50,0°	128.4	106.2	77.5	63.1	56.8	52.0	46.1	38.7	40.5	45.7	47.2	51.3	500.6
52,5°	126.2	101.8	73.6	57.3	47.5	43.0	38.5	34.1	34.3	36.5	39.1	52.3	552.9
55,0°	121.3	90.9	64.3	50.8	40.1	35.5	32.1	28.8	29.1	29.6	33.2	53.2	606.0
57,5°	113.2	77.9	54.8	44.2	35.4	30.0	28.4	26.1	26.1	26.7	28.2	52.6	658.6
60,0°	105.8	72.5	47.5	38.0	29.4	26.0	25.2	23.4	23.3	23.8	24.7	51.0	709.6
62,5°	92.5	67.2	45.6	30.4	23.1	21.1	21.2	20.4	20.0	20.6	19.9	49.0	758.6
65,0°	79.4	59.7	44.2	23.4	17.5	17.2	17.8	16.9	17.4	17.0	16.6	46.9	805.5
67,5°	69.4	52.0	33.4	16.8	12.4	12.9	14.2	13.4	14.0	14.0	13.3	44.2	849.8
70,0°	61.2	45.1	26.0	12.9	9.9	9.5	10.2	10.0	10.9	11.8	11.2	41.0	890.8
72,5°	54.5	37.0	17.5	9.7	7.6	7.4	7.3	7.4	7.9	9.1	8.6	35.2	926.1
75,0°	37.2	22.5	10.7	7.7	6.2	6.0	5.5	5.7	5.5	6.1	6.1	28.7	954.8
77,5°	24.6	13.7	8.0	6.1	4.8	4.3	4.0	3.9	3.0	2.8	2.6	20.1	974.8
80,0°	17.5	8.2	5.8	4.7	3.7	3.1	2.8	2.2	1.3	0.9	0.7	13.3	988.1
82,5°	13.4	6.6	4.4	3.5	2.9	2.2	1.8	1.6	0.9	0.4	0.5	7.7	995.8
85,0°	6.1	3.6	3.0	2.3	2.0	1.6	1.0	0.8	0.6	0.3	0.3	3.1	998.9
87,5°	2.8	2.2	1.6	1.3	1.1	0.9	0.7	0.6	0.4	0.3	0.3	1.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2G41F08HE EAN: 4058352558256	LP number 58294_65
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	8600	58.6	60.9	59.8
95	241	252	8160	55.1	57.2	56.2
90	229	250	7754	51.9	53.9	52.9
85	216	248	7313	48.6	50.4	49.5
80	203	246	6873	45.3	47.0	46.2
75	190	243	6433	42.2	43.8	43.0
70	178	241	6027	39.3	40.8	40.0
65	165	238	5587	36.2	37.7	37.0
60	152	235	5146	33.3	34.5	33.9
55	140	232	4740	30.6	31.7	31.2
50	127	229	4300	27.6	28.6	28.1
45	114	225	3860	24.8	25.6	25.2
40	102	221	3454	22.3	23.1	22.7
35	89	216	3013	19.5	20.2	19.8
30	76	210	2573	16.7	17.3	17.0
25	63	203	2133	14.1	14.6	14.4
20	51	195	1727	11.7	12.1	11.9
15	38	184	1287	9.2	9.4	9.3
14	35	181	1185	8.6	8.8	8.7