

Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2B33T08HB
EAN: 4058352724460

LP number
59065_764



Version post-top or side-entry mounting, Smart Interface up/down
Optic asymmetric, wide distribution (ST0.5a)
Cover toughened safety glass
Lamps LED 3000 K | CRI ≥ 70
Controlgear EVG-Smart Interface
Rated values Net luminous flux = 9040 lm
 Power consumption = 66.0 W
 Luminous efficacy = 137 lm/W

serial
documentation
18.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C207.5-27.5

C270-90

Imax: 661 cd/klm

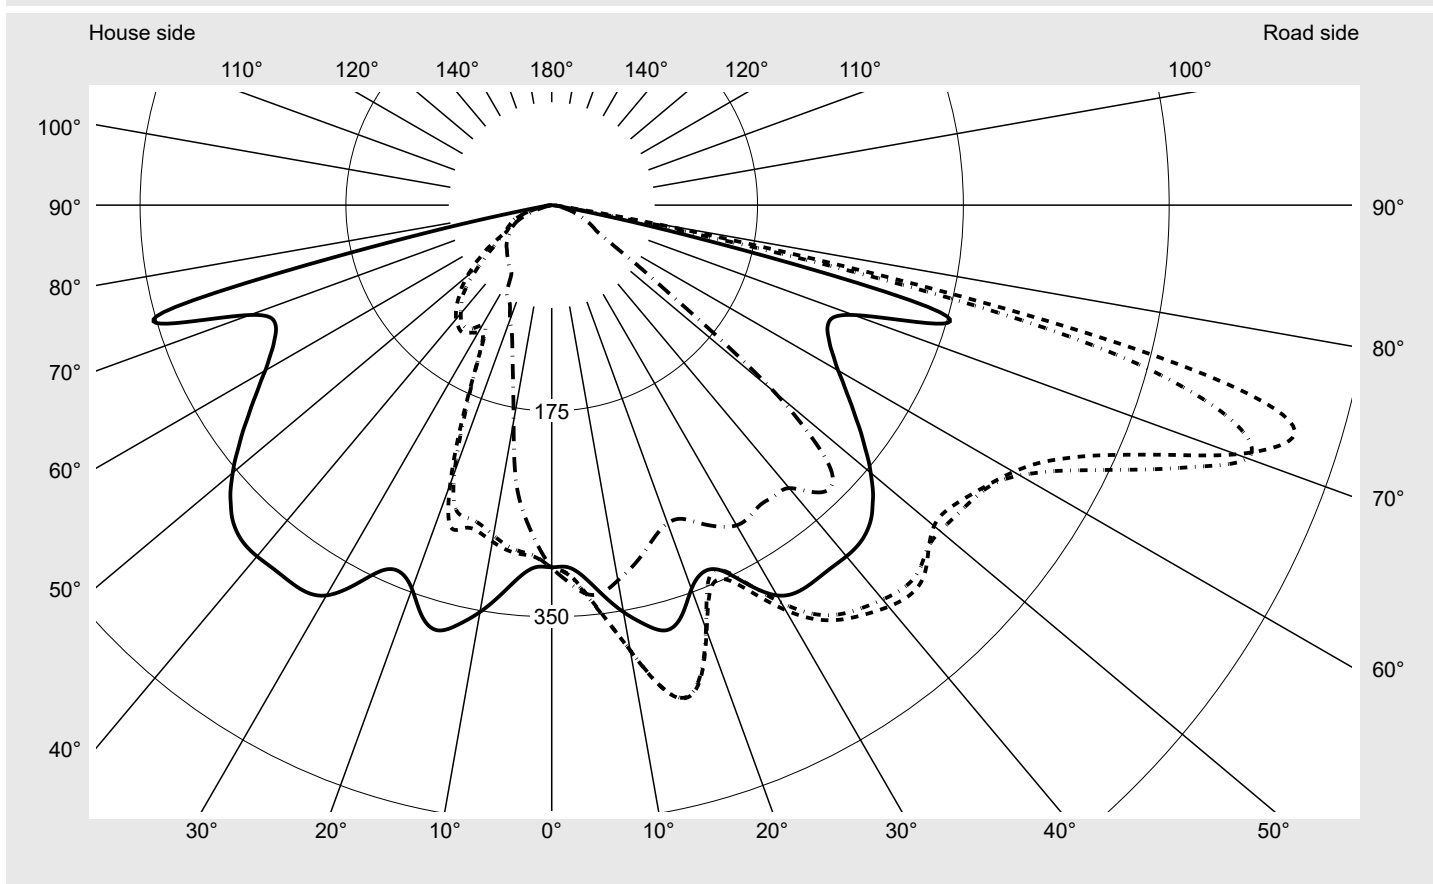

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	629.6
Imax 80°	99.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 21 mini LED

Order number: **5XE2B33T08HB**
EAN: **4058352724460**

LP number
59065_764

Envelope curve in cd/klm

KMK 73°


KMK 72°

KMK 71°

KMK 70°

sit

eco

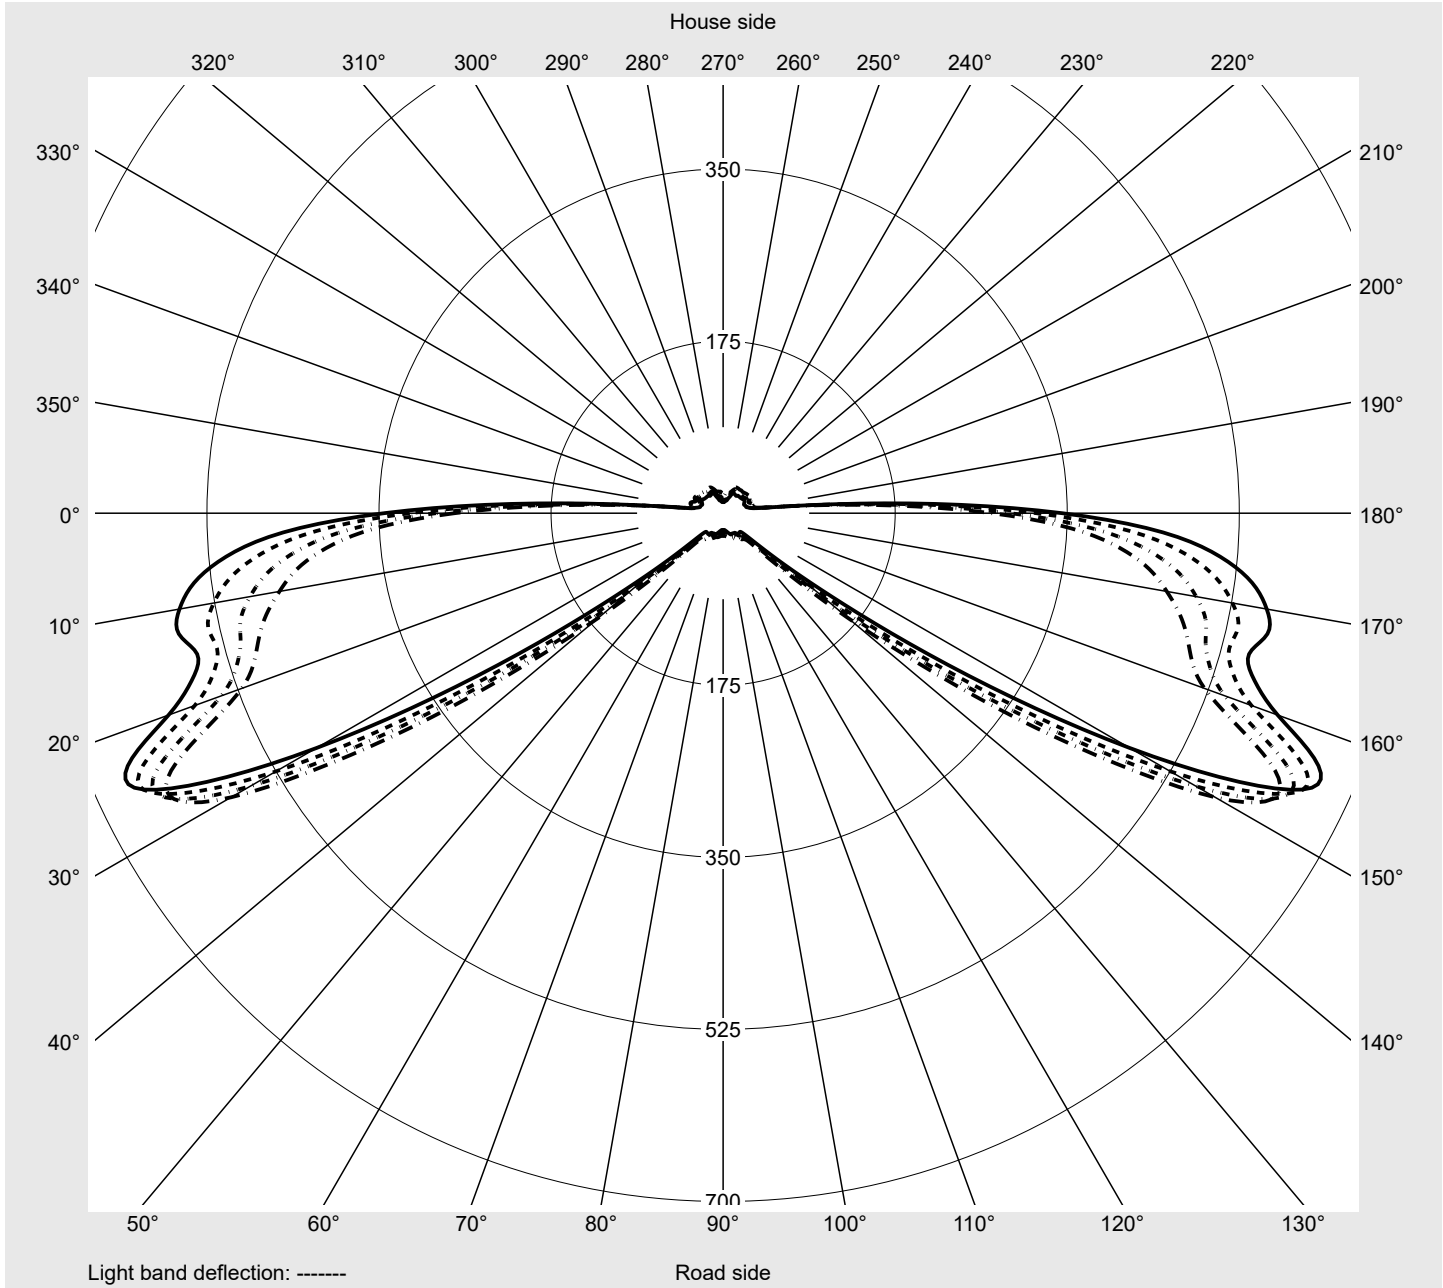

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	308.1	308.8	309.3	310.1	310.8	311.3	311.8	312.4	312.9	313.4	313.7	314.3	314.7	315.1	316.0
5,0°	317.7	319.6	321.6	323.5	325.2	326.6	327.6	328.5	329.3	330.1	331.0	332.4	333.0	333.5	333.7
7,5°	334.5	338.4	342.1	345.1	347.7	349.5	351.2	352.4	353.7	354.6	355.3	355.6	355.6	355.3	354.8
10,0°	351.3	358.1	364.1	369.2	373.3	376.6	379.4	381.6	383.3	384.1	384.6	384.4	383.1	381.3	378.6
12,5°	365.0	374.7	383.1	390.4	396.3	402.2	406.9	411.9	413.7	416.2	416.9	416.3	414.2	410.6	405.9
15,0°	374.3	385.3	394.7	402.2	409.1	415.6	422.0	428.1	430.4	433.1	434.2	433.6	431.6	428.4	425.3
17,5°	366.6	377.4	386.3	393.5	400.0	406.2	412.2	417.2	419.8	421.5	421.3	419.8	417.1	413.9	411.0
20,0°	347.4	357.9	364.2	370.8	374.9	380.5	383.7	388.9	389.3	389.1	385.2	383.5	378.6	376.6	370.5
22,5°	337.6	345.7	350.7	355.3	358.9	362.7	365.0	367.5	364.6	359.8	353.3	347.3	340.8	334.2	327.2
25,0°	343.1	350.8	356.8	361.5	366.2	369.4	371.4	370.6	365.9	359.1	351.2	342.5	333.5	323.5	313.5
27,5°	364.4	373.1	379.9	385.6	390.9	395.0	395.9	392.9	387.3	380.2	372.3	364.0	355.5	347.0	337.5
30,0°	383.2	393.7	402.4	410.0	416.8	421.5	422.0	418.2	412.2	405.2	397.5	390.2	383.3	376.7	368.4
32,5°	389.7	403.3	414.6	425.2	434.7	440.7	441.1	437.1	431.2	424.4	417.4	411.8	406.8	402.3	396.2
35,0°	389.9	408.1	422.8	436.2	448.1	454.9	455.0	450.8	444.2	436.7	430.0	424.8	420.3	416.5	413.7
37,5°	389.4	413.4	432.2	449.5	463.9	471.1	469.9	463.8	455.5	446.4	438.5	432.1	426.8	423.8	424.8
40,0°	389.8	420.3	443.7	464.5	480.6	487.4	485.0	477.2	466.8	455.4	445.6	437.8	432.1	430.1	433.0
42,5°	388.6	425.8	453.7	477.2	494.3	500.9	497.4	487.3	474.9	461.5	450.1	442.0	437.8	438.7	442.0
45,0°	382.6	425.9	457.7	483.1	500.5	506.7	502.1	490.3	475.2	459.4	447.1	440.8	440.7	447.7	460.0
46,0°	378.5	424.2	457.4	483.2	500.5	506.5	501.5	489.1	472.7	455.5	442.7	437.9	441.5	453.3	469.4
47,0°	373.1	421.4	456.4	482.8	499.9	505.7	500.5	487.1	469.1	450.4	437.3	434.5	443.8	462.6	479.9
48,0°	367.7	418.5	455.1	481.8	498.7	504.2	498.6	484.5	465.0	444.9	431.9	432.0	447.1	470.0	486.0
49,0°	361.1	414.7	453.0	480.3	496.8	502.0	496.1	481.3	460.4	439.5	427.5	431.0	450.3	474.7	489.4
50,0°	354.0	410.0	450.3	478.1	494.6	499.5	493.4	477.9	455.7	434.5	424.4	431.2	452.1	475.8	489.4
51,0°	346.9	405.0	447.1	475.4	491.9	496.9	490.7	474.6	451.6	431.0	423.2	431.9	452.4	474.4	486.6
52,0°	338.9	399.3	443.0	472.0	488.9	494.4	488.3	471.8	448.7	429.4	423.9	432.9	450.9	469.4	480.7
53,0°	331.3	393.6	439.0	468.6	485.7	491.8	486.1	469.5	447.1	429.9	425.9	434.0	449.2	464.7	475.3
54,0°	323.8	387.7	434.4	464.5	481.9	488.6	483.7	467.9	447.1	432.0	428.6	435.2	447.5	460.6	472.2
55,0°	315.7	381.2	429.2	459.8	477.6	485.1	481.1	466.9	448.4	435.2	431.9	436.8	446.5	458.6	472.3
56,0°	308.5	375.6	424.4	455.3	473.4	481.6	479.1	466.8	450.7	439.1	435.5	438.7	447.2	459.9	475.6
57,0°	301.2	369.6	419.0	450.0	468.5	477.8	477.1	467.3	453.6	443.4	439.3	441.4	449.8	464.8	481.3
58,0°	294.2	363.8	413.9	445.0	463.8	474.3	475.7	468.1	456.6	447.8	443.5	445.5	455.3	472.8	489.0
59,0°	287.8	358.6	409.3	440.2	459.3	471.2	474.9	469.1	459.4	451.9	448.2	451.4	463.7	482.6	496.5
60,0°	281.2	352.9	404.1	434.7	454.0	467.9	474.1	470.1	462.0	455.9	453.5	459.6	476.1	496.8	505.2
61,0°	275.7	348.2	399.8	430.1	449.8	465.3	473.5	471.2	464.6	460.2	459.9	469.9	489.9	509.8	510.1
62,0°	270.9	343.8	395.4	425.6	445.9	463.0	473.1	472.3	467.5	465.0	467.7	481.9	504.6	522.3	512.5
63,0°	266.1	339.3	390.7	421.0	442.6	461.3	472.8	473.6	471.0	471.0	477.7	496.8	522.5	533.2	507.7
64,0°	262.4	336.0	386.9	417.2	439.9	460.0	472.6	475.0	475.0	478.4	490.0	513.9	539.4	539.5	498.2
65,0°	259.0	332.9	383.5	414.0	437.6	459.0	472.4	476.3	479.3	487.3	504.4	532.5	553.7	539.0	483.0
66,0°	256.6	330.6	380.9	411.6	436.4	458.8	472.5	477.9	484.3	498.3	522.3	552.6	564.1	531.2	460.2
67,0°	255.8	329.5	378.9	409.8	435.4	457.7	472.8	480.0	490.4	511.5	543.0	572.8	569.4	519.5	439.1
68,0°	256.9	330.8	380.0	411.0	436.2	457.8	474.1	483.3	497.7	526.9	566.8	593.5	572.4	504.8	412.3
69,0°	262.1	338.0	387.8	418.7	442.0	461.6	478.2	489.1	507.1	545.2	593.9	614.9	578.0	493.5	388.3
70,0°	273.1	354.5	405.0	437.4	458.2	475.8	488.7	500.0	521.1	567.1	619.4	629.6	577.9	474.0	361.2
71,0°	292.3	380.4	434.2	467.9	488.6	502.8	508.0	519.1	543.1	594.3	640.0	629.2	555.4	441.6	324.0
72,0°	318.8	414.0	471.3	505.8	526.0	536.5	532.9	543.9	571.9	624.9	655.4	616.0	525.2	404.9	284.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	316.4	316.7	317.0	317.2	317.9	318.4	318.7	318.5	318.5	318.4	318.7	319.2	319.3	319.4	319.5
5,0°	334.2	333.8	334.5	334.3	334.7	334.4	334.7	334.6	334.1	333.8	333.7	333.1	333.2	332.9	333.0
7,5°	354.1	353.4	352.6	351.5	350.2	349.0	347.8	346.0	344.7	343.2	341.8	340.5	339.2	338.1	337.0
10,0°	376.0	372.5	369.3	365.0	361.2	357.0	352.8	349.2	345.8	342.6	339.7	337.3	335.1	333.0	331.2
12,5°	400.3	393.0	385.1	377.4	369.8	362.7	356.8	351.0	345.7	340.9	336.8	333.2	330.1	327.3	324.8
15,0°	422.3	415.9	407.6	397.9	387.0	376.0	363.8	354.9	346.8	339.9	334.1	328.9	324.4	320.5	317.1
17,5°	407.4	403.1	399.0	393.8	387.9	380.5	368.8	359.1	348.8	339.0	330.7	323.9	318.1	313.0	308.6
20,0°	370.3	364.8	363.7	360.0	358.5	356.2	353.8	350.7	345.5	337.7	328.6	319.8	312.7	307.0	302.0
22,5°	324.7	323.4	323.0	322.5	321.8	321.3	322.5	324.0	325.5	325.9	323.2	317.2	310.3	304.4	299.7
25,0°	305.4	299.2	294.2	291.7	291.4	293.2	296.0	298.2	301.8	306.7	311.3	312.8	311.0	307.2	303.7
27,5°	326.8	314.7	302.3	291.6	283.8	281.8	281.0	282.7	286.5	292.4	300.1	307.7	312.2	312.5	310.8
30,0°	358.5	347.3	334.9	320.1	303.0	290.1	280.6	277.6	279.6	284.8	292.6	302.7	312.5	317.9	318.4
32,5°	390.1	383.0	373.1	358.2	338.8	317.9	298.9	286.6	282.2	285.6	293.9	304.9	316.5	325.1	327.2
35,0°	412.8	410.5	403.1	389.5	370.8	350.0	328.9	311.1	300.6	300.7	308.4	318.5	328.0	335.2	336.5
37,5°	427.9	427.9	422.2	411.3	397.0	383.4	368.5	354.5	342.9	336.3	335.0	337.3	340.2	343.0	343.2
40,0°	436.3	435.4	431.9	430.4	432.0	428.5	419.2	404.4	384.6	363.9	348.8	341.9	339.9	340.5	341.6
42,5°	444.8	449.7	458.7	466.4	467.2	458.0	443.8	422.6	395.1	366.9	344.4	333.2	333.2	338.3	344.5
45,0°	471.7	478.6	481.0	478.9	471.1	456.3	436.7	412.4	386.5	362.1	342.3	332.2	333.6	340.1	345.4
46,0°	481.0	485.1	483.6	476.8	465.0	448.9	429.3	406.9	383.5	360.9	341.8	330.6	329.9	335.0	339.0
47,0°	488.2	488.4	481.5	469.7	455.5	440.6	422.2	401.8	380.0	358.3	338.8	325.5	322.2	325.4	327.7
48,0°	491.2	487.6	477.3	463.5	448.9	433.2	415.5	395.8	374.3	352.4	331.6	315.9	309.3	310.1	309.7
49,0°	491.2	484.0	471.7	457.6	443.2	426.9	408.4	387.8	365.0	342.1	319.7	302.0	292.3	290.6	287.7
50,0°	489.0	479.4	467.2	453.6	437.9	419.4	398.5	375.6	350.3	326.0	302.0	283.0	270.0	266.4	260.2
51,0°	485.7	476.5	465.0	451.1	433.6	410.2	385.4	358.9	331.0	304.9	280.3	259.6	244.7	238.2	231.8
52,0°	482.0	475.5	463.8	447.0	425.1	397.5	367.6	337.4	307.2	280.3	255.6	234.8	218.9	211.2	203.0
53,0°	479.7	476.0	463.1	442.4	415.1	380.2	344.6	311.1	279.6	252.5	228.2	207.9	191.7	182.3	171.4
54,0°	479.7	477.0	462.4	437.7	404.0	360.0	320.0	284.8	253.0	226.4	202.9	183.2	167.5	156.5	144.4
55,0°	482.0	478.2	458.5	424.8	380.3	334.6	292.3	256.3	224.8	199.1	176.9	158.5	143.4	132.2	120.7
56,0°	485.2	478.1	452.2	409.3	358.0	306.7	262.7	226.2	194.9	170.2	149.7	133.5	120.7	111.0	100.4
57,0°	488.5	475.9	439.7	388.7	331.1	279.3	234.3	198.3	167.4	144.5	126.3	113.0	100.6	89.9	79.7
58,0°	490.7	468.6	421.3	362.1	301.7	250.7	205.4	170.2	140.2	120.1	103.6	91.9	79.0	71.2	63.9
59,0°	491.3	459.3	402.7	339.0	277.5	222.8	178.0	143.6	116.0	97.5	83.3	73.4	65.0	59.6	55.0
60,0°	487.7	441.4	375.6	308.4	246.1	194.9	151.0	118.8	94.3	79.1	69.2	62.4	56.3	52.0	48.7
61,0°	479.5	421.8	350.5	281.6	219.5	167.3	125.1	96.3	76.4	65.2	58.8	54.5	50.1	46.7	44.1
62,0°	468.6	402.1	327.6	257.9	195.2	142.7	104.1	79.5	63.7	55.8	52.5	50.0	46.6	43.5	41.4
63,0°	448.5	374.0	296.7	225.8	163.9	119.3	86.3	65.8	53.8	49.6	48.7	47.1	44.1	41.2	39.2
64,0°	429.0	349.4	271.4	199.8	140.1	98.8	71.3	54.6	46.9	45.4	45.5	44.1	41.5	38.9	37.1
65,0°	402.8	321.3	240.0	172.2	116.0	81.9	59.2	47.3	42.7	42.3	42.5	41.0	38.8	36.7	35.0
66,0°	374.2	289.5	209.3	142.9	95.4	67.0	49.8	42.3	39.4	39.3	39.5	38.2	36.0	34.5	32.9
67,0°	348.9	262.5	182.0	120.9	79.2	54.9	43.5	39.0	36.7	36.5	36.6	35.3	33.4	31.9	30.7
68,0°	315.2	226.5	148.9	95.5	60.6	45.7	39.2	36.5	34.4	34.0	33.9	32.9	31.3	30.0	28.8
69,0°	286.1	195.6	124.1	76.6	49.3	39.1	35.9	34.3	32.0	31.4	31.7	30.8	29.0	27.9	26.9
70,0°	252.1	165.7	100.4	61.6	41.0	35.0	33.3	32.4	29.9	29.3	29.7	28.9	27.5	26.7	25.6
71,0°	217.4	134.7	78.5	47.2	34.4	31.5	30.7	30.2	27.6	27.1	27.2	26.7	26.0	25.8	24.9
72,0°	185.4	111.2	61.4	37.3	29.8	28.3	28.1	27.9	25.7	24.9	25.0	24.6	24.6	24.6	23.7

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	319.6	320.3	320.4	320.5	320.5	320.5	320.6	307.4	306.6	305.7	304.9	304.1	303.3	302.5	301.7
5,0°	332.8	332.3	332.4	332.0	331.9	331.9	331.6	315.8	314.0	312.2	310.1	308.0	305.9	303.8	301.9
7,5°	335.8	334.8	333.9	333.1	332.6	332.3	332.2	330.4	326.4	322.7	319.0	315.0	311.1	307.1	303.3
10,0°	329.4	327.9	326.6	325.5	324.6	324.0	324.0	344.4	337.6	331.0	325.0	318.7	312.8	307.1	301.5
12,5°	322.6	320.6	318.8	317.3	316.2	315.1	315.2	355.2	345.5	336.4	327.9	320.0	312.5	305.2	298.1
15,0°	314.3	311.8	309.6	307.8	306.3	305.1	304.9	362.8	351.5	341.2	332.3	324.8	316.4	308.1	300.0
17,5°	305.0	302.1	299.6	297.6	296.0	294.8	294.4	354.5	342.5	332.0	323.3	317.1	310.9	305.2	300.2
20,0°	297.9	294.7	292.3	290.3	288.9	288.1	287.9	335.9	322.0	310.8	299.8	290.8	282.7	277.5	271.8
22,5°	296.0	293.1	291.0	289.7	289.0	288.8	288.7	326.1	311.7	297.9	284.1	271.1	259.0	247.9	233.0
25,0°	301.4	299.9	298.7	298.2	298.3	298.6	298.5	331.2	315.9	298.6	280.3	260.1	239.3	214.6	187.6
27,5°	309.2	308.4	307.6	307.3	307.4	307.9	308.1	352.2	335.4	315.0	292.1	266.2	235.2	197.2	161.6
30,0°	316.8	315.7	314.8	314.1	313.7	314.0	314.4	369.6	351.6	329.1	302.6	270.7	231.0	186.0	152.9
32,5°	324.4	321.1	318.5	316.5	314.9	313.8	313.7	373.3	352.9	327.9	297.7	258.9	212.1	170.0	147.0
35,0°	331.2	324.6	319.6	316.2	313.4	311.3	310.4	368.2	343.5	314.5	279.1	233.0	183.4	152.3	139.8
37,5°	337.4	328.9	322.2	317.9	314.9	312.6	311.5	360.8	330.0	296.2	252.7	199.6	157.7	138.7	135.4
40,0°	338.4	330.6	323.8	319.3	316.4	314.6	314.1	353.5	315.8	275.9	222.7	168.6	137.6	131.2	131.7
42,5°	346.2	341.7	336.4	334.0	332.2	332.0	331.2	344.6	299.7	250.6	190.5	143.5	126.1	125.5	126.0
45,0°	346.9	342.5	338.3	336.3	336.6	336.8	336.9	331.8	280.5	222.3	160.9	124.3	117.0	118.3	120.2
46,0°	339.6	335.3	331.8	330.6	331.5	331.7	332.1	325.1	271.5	210.7	150.4	118.6	112.9	114.5	117.0
47,0°	327.4	323.1	320.0	318.5	319.7	320.3	321.0	317.3	261.5	198.6	140.4	113.4	110.0	112.1	114.3
48,0°	307.8	302.7	300.0	298.5	300.0	300.0	301.7	309.5	251.7	187.5	132.0	108.8	106.5	109.3	110.9
49,0°	284.6	279.0	276.1	273.5	275.2	274.7	277.1	300.8	240.9	176.0	124.1	104.0	102.1	106.3	107.7
50,0°	257.2	248.9	247.1	241.0	245.0	241.1	247.2	291.3	229.9	164.9	116.7	99.4	98.7	103.4	104.4
51,0°	226.1	216.8	210.7	203.9	204.2	201.1	204.1	282.2	219.2	154.6	110.0	95.2	94.9	99.8	100.4
52,0°	193.4	178.9	171.2	163.6	163.7	160.8	162.9	272.2	207.9	144.5	103.2	91.0	93.1	96.9	96.8
53,0°	157.3	142.6	134.9	129.0	128.7	127.0	127.7	263.1	197.8	135.9	96.6	85.8	92.5	96.3	93.9
54,0°	130.0	116.6	110.4	106.6	106.7	105.2	105.6	254.0	187.8	127.7	89.8	77.9	80.9	90.3	91.2
55,0°	108.7	98.6	93.6	90.3	89.8	87.9	88.4	244.5	177.7	119.9	83.7	70.6	70.0	78.2	84.8
56,0°	89.1	79.9	76.0	73.7	73.4	71.8	72.5	235.9	169.1	113.3	79.2	66.5	65.4	69.3	74.6
57,0°	72.1	66.7	64.0	62.7	62.6	61.2	61.9	227.6	160.9	107.2	75.1	63.5	62.8	65.3	67.5
58,0°	60.4	56.6	55.5	54.6	55.0	53.2	54.3	219.6	153.6	101.8	71.4	60.9	60.8	63.2	64.6
59,0°	52.4	50.1	49.2	48.8	48.9	47.7	48.1	212.3	147.1	97.1	68.2	58.8	58.8	61.2	61.8
60,0°	47.0	45.2	44.5	44.8	44.8	44.1	44.0	205.1	140.7	92.5	65.1	56.9	57.3	59.5	59.6
61,0°	42.9	41.8	41.6	42.3	42.2	41.9	41.9	199.1	135.3	88.4	62.4	55.3	56.1	58.0	57.6
62,0°	40.5	39.5	39.5	40.3	40.4	40.0	40.0	193.8	130.0	83.9	59.4	53.5	54.7	56.4	55.3
63,0°	38.4	37.5	37.5	38.5	38.4	38.2	38.0	187.8	122.6	77.5	55.7	51.3	53.3	54.9	53.4
64,0°	36.3	35.5	35.7	36.4	36.5	36.1	36.1	181.9	113.9	70.4	51.9	48.9	51.1	52.7	51.1
65,0°	34.3	33.6	33.9	34.5	35.1	34.1	33.8	175.7	105.1	64.0	48.3	46.1	48.2	50.1	48.5
66,0°	32.4	31.8	32.3	32.9	33.2	31.9	31.8	171.5	98.8	59.6	45.2	43.6	46.1	47.8	46.3
67,0°	30.3	30.3	30.8	31.0	30.7	29.6	29.7	169.3	95.0	56.0	42.3	41.1	43.1	44.2	42.4
68,0°	28.5	28.7	29.1	29.0	28.2	27.5	27.6	168.9	92.3	52.6	39.2	38.3	40.7	42.0	39.7
69,0°	26.8	26.9	26.8	26.3	25.7	25.3	25.3	171.0	91.1	49.7	36.5	35.5	37.7	38.4	36.7
70,0°	25.3	25.0	24.5	23.8	23.4	23.1	23.2	176.6	91.3	46.9	33.6	32.5	34.1	34.8	33.4
71,0°	24.0	23.1	22.3	21.5	21.3	20.8	21.2	187.1	93.6	44.6	30.8	29.5	30.4	31.1	29.9
72,0°	22.6	21.5	20.5	19.7	19.2	18.9	19.6	202.6	97.4	43.4	29.6	27.0	26.6	27.3	26.5

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9
2,5°	300.8	300.0	299.2	298.5	297.9	297.2	296.6	295.6	295.1	294.7	293.9	293.0	292.2	291.8	291.4
5,0°	299.9	297.9	295.8	293.9	292.0	290.0	288.1	286.3	285.1	283.1	281.6	279.9	278.1	276.7	275.1
7,5°	299.3	295.5	291.9	288.2	284.6	281.2	277.8	274.5	271.1	268.5	265.5	262.6	259.7	257.0	254.2
10,0°	295.8	290.5	285.1	279.9	274.8	269.7	264.6	259.6	254.3	250.9	245.7	240.6	235.0	228.9	224.1
12,5°	291.1	284.9	278.4	271.7	264.4	256.9	248.5	239.9	230.8	221.7	212.5	203.3	196.6	189.1	183.5
15,0°	292.0	284.1	275.3	264.8	252.6	239.9	227.6	215.3	204.7	194.9	185.8	179.6	174.4	169.4	164.7
17,5°	294.8	286.5	271.0	256.3	241.4	227.2	214.9	204.5	195.6	187.5	180.0	172.4	165.0	157.9	151.1
20,0°	265.4	252.3	241.8	231.6	225.4	220.0	214.3	206.8	197.1	186.1	175.0	164.1	154.5	146.3	139.3
22,5°	216.2	200.7	193.5	192.2	193.9	195.8	196.1	193.8	188.2	179.8	170.0	159.5	149.6	141.1	134.0
25,0°	165.2	153.2	152.2	156.0	159.5	162.5	164.3	165.4	165.1	163.0	158.6	152.3	144.9	136.3	127.5
27,5°	137.8	126.7	123.1	123.9	126.3	131.0	136.3	140.1	141.1	140.2	138.4	135.9	131.3	124.8	117.9
30,0°	135.2	125.1	117.8	113.7	111.8	112.0	113.5	115.5	117.7	119.5	119.7	119.0	115.4	109.3	103.7
32,5°	135.3	128.6	124.1	119.1	114.6	109.5	105.2	102.3	101.4	101.5	101.2	98.6	96.3	94.2	91.4
35,0°	135.5	132.2	127.1	121.5	115.0	108.7	102.7	96.5	90.3	85.3	82.4	80.7	79.5	77.8	76.5
37,5°	134.1	130.4	125.7	118.9	112.1	105.3	96.7	86.7	78.5	73.7	71.1	68.9	68.4	69.0	69.6
40,0°	130.1	126.5	120.3	113.5	106.7	96.5	84.8	76.1	70.8	67.4	65.0	63.4	62.6	62.7	63.7
42,5°	125.1	120.2	113.4	106.5	95.6	83.2	74.7	69.7	66.3	63.3	60.9	59.2	58.7	59.0	59.8
45,0°	118.4	112.1	106.0	95.2	82.0	72.8	67.7	64.4	61.8	59.8	58.1	57.0	56.4	56.3	56.7
46,0°	114.6	108.5	101.3	89.3	77.1	69.3	65.0	62.2	60.2	58.6	57.3	56.4	55.7	55.4	55.7
47,0°	111.3	105.7	97.0	83.9	72.7	66.2	62.5	60.2	58.7	57.5	56.6	55.8	55.2	54.8	54.8
48,0°	107.4	101.8	92.1	78.9	69.0	63.5	60.4	58.6	57.5	56.6	55.8	55.2	54.6	54.2	54.1
49,0°	103.6	97.5	86.4	73.8	65.4	60.9	58.5	57.2	56.4	55.7	55.1	54.5	53.9	53.5	53.4
50,0°	100.6	93.7	81.6	69.5	62.3	58.6	56.9	56.0	55.4	54.8	54.3	53.9	53.3	52.9	52.7
51,0°	97.0	89.0	76.0	65.2	59.5	56.7	55.5	54.8	54.3	53.9	53.5	53.1	52.6	52.2	52.1
52,0°	93.4	84.5	71.3	61.6	57.1	55.1	54.2	53.7	53.3	53.0	52.7	52.3	51.9	51.5	51.4
53,0°	89.7	80.2	67.1	58.7	55.3	53.8	53.0	52.6	52.3	52.1	51.8	51.6	51.2	50.8	50.7
54,0°	85.9	74.6	62.3	55.9	53.6	52.4	51.8	51.5	51.3	51.1	50.8	50.6	50.3	50.1	49.9
55,0°	82.0	70.0	58.6	53.7	52.0	51.1	50.6	50.4	50.3	50.1	49.9	49.7	49.5	49.4	49.2
56,0°	75.1	65.9	56.0	52.0	50.6	49.8	49.3	49.2	49.1	49.1	48.9	48.9	48.8	48.7	48.3
57,0°	66.5	59.5	53.1	50.4	49.2	48.5	48.1	48.0	47.9	47.9	47.9	47.9	47.8	47.8	47.5
58,0°	61.1	53.8	50.2	48.9	47.8	47.2	46.9	46.7	46.6	46.8	46.9	46.9	46.8	46.8	46.7
59,0°	56.8	48.9	46.3	46.6	46.5	46.1	45.7	45.5	45.4	45.6	45.8	45.7	45.7	45.7	45.6
60,0°	54.0	46.5	43.7	44.1	45.1	44.9	44.5	44.2	44.2	44.4	44.6	44.7	44.6	44.7	44.6
61,0°	51.6	44.9	42.4	42.5	43.8	43.7	43.4	43.1	43.1	43.3	43.4	43.5	43.4	43.6	43.5
62,0°	49.0	43.3	41.2	41.4	42.6	42.5	42.2	41.9	41.8	42.0	42.1	42.1	42.1	42.2	42.2
63,0°	46.9	41.9	40.4	40.8	41.5	41.3	41.0	40.8	40.6	40.7	40.8	40.8	40.8	41.0	41.0
64,0°	44.9	40.6	39.6	40.4	40.5	40.1	39.9	39.7	39.4	39.4	39.3	39.5	39.4	39.6	39.5
65,0°	42.5	39.2	38.8	39.7	39.4	38.9	38.6	38.5	38.1	38.0	37.9	38.1	38.0	38.0	38.1
66,0°	40.7	38.1	37.7	38.7	38.3	37.7	37.4	37.2	36.8	36.5	36.4	36.6	36.4	36.5	36.7
67,0°	38.0	36.5	36.4	37.4	37.0	36.4	36.1	35.8	35.3	35.0	34.8	34.8	34.6	34.6	34.8
68,0°	35.8	34.9	35.5	36.0	35.5	34.9	34.6	34.3	33.7	33.3	33.0	33.0	32.9	33.0	33.3
69,0°	33.4	33.3	34.5	34.8	34.0	33.3	33.0	32.7	32.1	31.6	31.2	31.2	31.1	31.2	31.5
70,0°	30.8	31.0	32.7	33.0	32.4	31.6	31.1	30.8	30.2	29.8	29.4	29.6	29.5	29.2	29.5
71,0°	28.2	28.5	30.3	31.0	30.4	29.5	29.0	28.6	28.1	27.8	27.5	27.8	27.4	27.1	27.0
72,0°	25.4	25.9	27.1	28.0	28.0	27.2	26.5	26.2	25.9	25.8	25.6	25.6	24.8	24.6	24.4

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	307.9	0.5	0.5
2,5°	290.8	290.1	289.6	289.3	289.0	288.5	288.4	288.3	287.9	287.7	287.4	287.7	288.1	3.7	4.1
5,0°	273.6	272.1	271.1	269.8	268.7	268.1	267.1	266.4	265.9	265.5	265.0	264.7	264.9	7.4	11.5
7,5°	251.6	249.3	246.8	244.8	242.7	240.9	239.3	237.8	236.7	235.9	235.1	234.5	234.5	11.1	22.6
10,0°	218.0	213.6	208.8	204.6	200.9	197.3	194.4	192.0	189.7	188.2	187.0	185.9	186.6	14.5	37.1
12,5°	178.2	173.7	169.8	166.3	163.3	160.7	158.3	156.5	154.8	153.6	152.7	151.8	152.0	17.8	54.9
15,0°	160.0	155.3	150.9	146.8	143.0	139.8	136.9	134.5	132.5	130.9	129.8	128.9	129.1	21.1	76.0
17,5°	144.9	139.3	134.3	129.9	126.2	123.0	120.3	118.0	116.2	114.9	114.0	113.4	113.1	23.8	99.8
20,0°	133.8	129.3	125.2	121.6	118.0	114.8	111.8	109.2	107.1	105.4	104.5	103.6	103.8	25.4	125.2
22,5°	127.8	122.2	116.9	112.2	107.9	104.1	100.9	98.2	96.1	94.5	93.5	92.8	92.7	26.5	151.7
25,0°	119.2	111.8	105.9	102.0	99.3	97.4	95.6	93.7	91.7	89.9	88.7	87.8	87.7	28.0	179.7
27,5°	110.9	104.4	98.6	94.1	90.8	88.5	86.9	85.7	84.7	83.6	82.8	82.1	82.0	30.5	210.3
30,0°	99.1	95.5	92.2	88.3	83.2	78.3	74.9	72.7	71.4	70.3	69.7	69.2	69.0	33.5	243.8
32,5°	87.0	82.3	78.2	75.1	72.7	70.9	69.5	68.4	67.5	66.7	66.3	65.8	65.8	36.6	280.4
35,0°	75.5	74.4	72.8	70.8	69.0	67.5	66.4	65.6	64.9	64.3	64.0	63.5	63.3	39.5	319.9
37,5°	69.5	69.0	68.6	67.9	66.9	65.9	64.9	63.9	63.0	62.2	61.5	60.9	60.6	42.5	362.5
40,0°	64.9	65.5	65.7	65.4	64.7	63.4	62.3	61.2	60.5	59.7	59.0	58.2	58.2	45.4	407.9
42,5°	60.9	61.9	62.3	62.1	61.7	61.0	60.3	59.7	58.9	58.1	57.1	56.4	56.2	48.1	456.0
45,0°	57.5	58.4	59.2	59.4	59.0	58.3	57.8	57.3	56.8	55.9	55.0	54.1	53.8	34.8	490.8
46,0°	56.4	57.3	57.9	57.9	57.7	57.4	57.3	56.9	56.2	55.4	54.4	53.5	53.2	20.1	510.9
47,0°	55.3	56.2	56.9	57.0	57.0	57.0	56.9	56.4	55.7	54.7	53.6	52.7	52.5	20.2	531.1
48,0°	54.4	55.1	55.9	56.3	56.5	56.5	56.3	55.9	55.3	54.1	53.0	52.0	51.8	20.1	551.2
49,0°	53.6	54.2	55.1	55.7	55.8	55.9	55.8	55.3	54.6	53.3	52.1	51.1	50.9	19.9	571.2
50,0°	52.9	53.5	54.4	55.1	55.4	55.4	55.3	54.7	53.9	52.6	51.3	50.2	49.9	19.6	590.8
51,0°	52.3	52.7	53.6	54.3	54.9	54.9	54.7	54.0	52.9	51.8	50.4	49.1	48.8	19.2	610.1
52,0°	51.6	52.1	52.8	53.8	54.4	54.3	54.0	53.1	52.1	50.8	49.2	48.0	47.6	18.7	628.8
53,0°	50.9	51.4	52.2	53.0	53.6	53.6	53.2	52.3	51.1	49.8	48.2	46.8	46.3	18.2	647.0
54,0°	49.9	50.4	51.4	52.1	52.6	52.7	52.4	51.4	50.0	48.6	47.1	45.7	45.1	17.8	664.8
55,0°	49.2	49.8	50.6	51.3	51.8	51.7	51.5	50.5	49.1	47.5	46.0	44.5	44.2	17.3	682.1
56,0°	48.3	48.8	49.6	50.4	50.9	50.8	50.3	49.3	48.1	46.3	45.0	43.4	43.0	16.8	698.9
57,0°	47.4	47.7	48.6	49.5	50.0	49.8	49.0	48.1	46.7	45.2	43.8	42.5	41.9	16.4	715.3
58,0°	46.5	46.5	47.3	48.3	49.1	48.7	47.9	46.8	45.4	44.0	42.8	41.5	41.0	16.0	731.4
59,0°	45.2	45.2	45.8	46.7	47.6	47.5	46.6	45.4	44.0	42.7	41.5	40.5	40.0	15.7	747.1
60,0°	44.3	43.9	44.3	45.3	46.2	46.1	45.4	44.4	42.8	41.3	40.3	39.5	39.4	15.4	762.5
61,0°	43.1	42.6	42.8	43.8	44.7	44.8	44.3	43.4	41.7	40.0	38.9	38.3	38.4	15.2	777.6
62,0°	41.8	41.3	41.3	42.0	42.9	43.0	42.6	41.8	40.1	38.2	37.3	36.7	36.8	15.0	792.6
63,0°	40.7	40.3	40.1	40.3	41.4	41.4	40.9	39.9	38.2	36.6	35.8	35.3	35.4	14.7	807.4
64,0°	39.5	39.1	38.9	38.9	39.5	39.1	38.8	37.6	36.3	34.7	34.2	33.8	34.1	14.5	821.9
65,0°	38.2	38.2	37.9	37.4	37.3	36.9	36.5	35.4	34.4	32.7	32.3	31.9	32.2	14.3	836.2
66,0°	37.1	37.2	37.0	35.8	35.1	34.2	33.7	33.0	32.3	31.0	30.3	29.9	30.4	14.1	850.3
67,0°	35.6	35.7	35.0	33.4	32.1	31.3	31.1	30.6	30.2	28.9	28.0	27.5	27.8	13.9	864.2
68,0°	34.0	33.8	32.8	31.4	30.1	28.9	28.7	28.0	27.6	26.1	25.7	25.3	25.3	13.7	877.8
69,0°	32.1	31.4	30.9	29.4	28.0	26.1	25.9	25.2	25.1	24.0	23.6	22.7	23.0	13.6	891.4
70,0°	29.5	29.5	28.8	27.2	25.5	23.5	22.8	22.7	22.0	22.2	21.4	20.4	20.5	13.6	905.0
71,0°	27.2	27.6	26.8	24.9	22.8	20.5	19.6	20.5	19.3	20.7	18.9	18.0	18.0	13.6	918.6
72,0°	25.0	24.9	24.4	21.7	20.0	17.7	16.6	17.6	17.3	17.0	15.7	15.0	15.2	13.7	932.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	344.9	447.8	507.5	542.8	561.4	567.1	553.8	566.9	600.3	650.6	660.7	591.8	477.7	349.1	231.2
74,0°	352.2	458.6	518.1	551.3	570.9	574.4	557.7	575.6	615.5	657.3	646.7	555.6	425.9	295.7	179.8
75,0°	324.1	422.3	480.5	511.8	538.1	546.6	531.6	556.8	602.4	629.9	604.7	507.1	371.5	222.9	117.1
76,0°	241.2	309.5	358.5	381.0	417.1	439.4	460.2	496.0	545.8	557.7	526.9	433.9	295.2	139.9	62.5
77,0°	150.2	185.1	212.0	226.8	258.3	284.6	344.4	387.7	438.0	439.6	413.4	330.6	209.0	86.4	36.0
78,0°	84.0	97.0	114.3	117.0	139.8	156.0	222.4	262.1	304.9	299.8	280.3	205.9	112.3	39.9	21.4
79,0°	37.7	43.8	50.1	53.9	65.3	79.2	127.4	158.4	188.8	180.6	159.4	96.4	35.5	15.5	12.4
80,0°	17.0	18.5	20.7	22.2	26.3	31.9	62.5	81.1	99.6	98.2	78.1	38.2	14.5	10.2	9.7
81,0°	8.6	9.0	9.8	10.7	12.1	13.9	26.2	30.6	37.9	40.4	30.7	14.9	8.5	7.6	7.4
82,0°	5.8	6.0	6.4	7.0	7.6	7.8	11.4	11.1	12.4	14.5	10.7	7.1	6.0	5.9	5.6
83,0°	4.4	4.4	4.8	5.1	5.4	5.5	6.2	6.0	6.5	7.5	6.5	5.0	4.4	4.7	4.9
84,0°	3.1	3.1	3.3	3.3	3.6	3.5	3.9	3.8	4.1	4.4	4.3	3.6	3.1	3.2	3.3
85,0°	2.4	2.4	2.5	2.5	2.5	2.3	2.6	2.5	2.7	2.8	2.8	2.5	2.4	2.3	2.5
86,0°	2.0	1.8	2.0	1.8	1.8	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.6	1.5	1.6
87,0°	1.5	1.5	1.5	1.3	1.3	1.3	1.4	1.3	1.3	1.2	1.3	1.1	1.0	1.0	1.0
88,0°	1.3	1.3	1.2	1.0	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.7	0.8	0.8
89,0°	1.0	1.0	1.0	1.1	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2B33T08HB
EAN: 4058352724460

LP number
59065_764

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	140.1	81.8	45.1	29.6	25.7	25.7	25.8	26.0	24.1	23.0	23.0	22.6	22.9	23.0	21.9
74,0°	96.0	52.5	31.7	24.5	22.9	23.3	23.6	24.0	22.8	21.6	21.4	21.0	21.1	20.8	20.1
75,0°	55.3	31.2	23.0	22.8	22.9	22.2	22.0	22.2	21.4	20.5	20.1	19.8	19.3	19.1	18.4
76,0°	30.4	20.5	18.7	21.3	23.3	22.2	21.7	20.9	19.6	18.9	18.2	17.9	17.3	17.2	16.5
77,0°	20.8	16.4	15.8	16.5	18.3	20.6	21.0	20.0	18.0	17.2	16.2	15.8	15.0	14.9	14.3
78,0°	15.1	13.2	12.9	13.7	14.4	16.9	18.0	18.2	16.9	15.8	14.6	13.9	12.7	12.6	11.8
79,0°	11.2	10.6	10.6	11.5	12.5	13.4	14.0	14.9	14.5	14.0	12.5	11.7	10.5	10.4	9.3
80,0°	8.9	8.4	8.6	9.5	10.0	10.8	10.8	11.1	11.2	11.5	10.8	9.9	8.5	8.2	7.3
81,0°	6.8	6.5	7.1	7.8	7.8	8.3	8.2	8.2	8.5	9.1	9.0	8.5	6.8	6.3	5.7
82,0°	5.5	5.0	5.3	5.9	6.2	6.2	6.2	6.3	6.5	7.2	7.4	6.8	5.3	4.7	4.3
83,0°	4.3	4.2	4.4	4.6	4.2	4.5	4.6	4.7	4.8	5.5	5.6	5.1	4.0	3.6	3.4
84,0°	3.3	3.1	3.4	3.3	2.9	3.1	3.0	3.3	3.5	3.8	4.0	3.7	2.9	2.7	2.5
85,0°	2.3	2.3	2.6	2.1	2.1	2.1	2.0	2.2	2.2	2.6	2.5	2.4	2.0	1.9	1.8
86,0°	1.4	1.8	1.6	1.6	1.2	1.4	1.4	1.5	1.3	1.5	1.4	1.5	1.4	1.4	1.2
87,0°	0.9	0.9	1.1	1.0	1.0	1.0	0.9	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.8
88,0°	0.9	0.9	0.5	0.7	0.6	0.7	0.7	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6
89,0°	0.5	0.5	0.5	0.4	0.8	0.5	0.5	0.5	0.6	0.5	0.5	0.4	0.4	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2B33T08HB
EAN: 4058352724460

LP number
59065_764

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	20.8	19.7	18.6	17.8	17.2	17.1	17.7	216.1	98.5	42.3	30.5	26.5	24.3	24.2	23.5
74,0°	19.3	18.2	17.0	16.1	15.5	15.3	15.6	214.2	91.6	39.1	30.0	26.7	24.1	22.1	21.4
75,0°	18.0	16.8	15.6	14.5	13.9	13.6	13.6	185.3	74.2	32.2	26.2	24.3	21.8	19.5	18.6
76,0°	16.5	15.2	14.0	12.9	12.2	11.7	11.7	124.9	46.9	23.2	21.4	20.5	18.5	17.2	16.3
77,0°	14.2	12.9	12.0	10.9	10.2	9.7	9.7	73.0	28.3	18.2	17.7	17.2	15.9	14.9	14.4
78,0°	11.9	10.7	10.0	9.2	8.6	7.9	8.1	38.9	19.9	17.5	15.1	14.4	13.1	12.4	12.3
79,0°	9.7	8.5	8.3	7.6	7.2	6.4	6.7	19.9	14.6	16.2	12.7	11.9	11.5	11.0	10.5
80,0°	7.5	6.9	6.4	6.0	5.6	5.1	5.1	11.3	10.3	11.9	9.8	9.5	9.3	8.9	8.6
81,0°	5.9	5.5	5.1	4.7	4.5	4.0	4.1	7.3	7.0	7.5	7.1	7.3	7.1	7.1	6.8
82,0°	4.5	4.1	3.9	3.8	3.6	3.2	3.2	5.4	5.4	5.4	5.5	5.7	5.7	5.6	5.5
83,0°	3.3	3.1	3.0	2.9	2.8	2.5	2.5	4.2	4.3	4.2	4.3	4.3	4.0	4.1	4.2
84,0°	2.4	2.3	2.2	2.2	2.1	2.0	2.1	3.1	3.3	3.2	3.3	3.2	3.3	3.1	3.0
85,0°	1.8	1.6	1.5	1.5	1.5	1.4	1.4	2.4	2.6	2.5	2.6	2.6	2.4	2.4	2.6
86,0°	1.2	1.0	1.0	1.0	1.0	0.9	0.9	1.9	2.0	1.9	2.0	1.9	1.8	1.9	1.8
87,0°	0.8	0.8	0.8	0.7	0.7	0.6	0.7	1.5	1.6	1.6	1.6	1.6	1.5	1.3	1.4
88,0°	0.6	0.6	0.5	0.3	0.5	0.3	0.5	1.3	1.3	1.3	1.3	1.3	1.4	1.3	1.1
89,0°	0.3	0.3	0.3	0.3	0.3	0.2	0.2	1.0	1.1	1.1	1.1	1.1	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
siteco		

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	22.9	23.6	24.3	25.3	25.5	24.7	24.1	23.8	23.5	23.5	23.4	23.3	22.1	22.2	22.5
74,0°	20.7	21.3	22.0	22.9	23.0	22.4	21.7	21.3	20.9	20.9	20.7	20.3	20.2	20.5	20.9
75,0°	18.0	18.1	18.8	20.0	20.4	20.0	19.2	18.7	18.2	18.0	17.7	17.8	18.2	19.2	19.4
76,0°	15.9	15.9	16.3	17.2	17.6	17.5	16.6	16.2	15.5	15.1	15.0	15.5	15.7	16.3	16.9
77,0°	13.5	13.6	13.5	14.5	14.9	15.1	14.1	13.7	13.0	12.7	12.4	12.4	12.1	13.0	13.8
78,0°	12.0	11.5	11.5	11.9	12.3	12.7	11.7	11.3	10.6	10.3	10.0	9.7	9.7	10.2	10.5
79,0°	10.2	9.9	9.7	9.9	10.3	10.5	9.6	9.2	8.6	8.2	7.9	7.9	7.8	8.0	8.0
80,0°	8.3	8.3	7.9	7.9	8.4	8.4	7.8	7.5	6.9	6.5	6.2	5.9	5.7	5.9	6.0
81,0°	6.8	6.5	6.5	6.4	6.6	6.7	6.3	5.9	5.4	5.0	4.7	4.5	4.2	4.3	4.4
82,0°	5.4	5.3	5.0	5.2	5.4	5.3	5.0	4.7	4.2	3.8	3.5	3.3	3.0	3.1	3.1
83,0°	3.8	4.0	3.8	3.9	4.2	4.2	3.9	3.5	3.1	2.8	2.6	2.4	2.3	2.3	2.0
84,0°	3.1	2.9	2.9	2.9	3.1	3.1	2.9	2.5	2.2	2.0	1.9	1.8	1.6	1.6	1.5
85,0°	2.3	2.2	2.0	2.0	2.2	2.2	2.0	1.8	1.5	1.4	1.3	1.2	1.1	1.1	0.8
86,0°	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3	1.1	1.1	1.0	0.8	0.8	0.7	0.7
87,0°	1.4	1.4	1.4	1.4	1.3	1.1	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.6	0.6
88,0°	1.1	1.1	1.0	1.1	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.6	0.6	0.6
89,0°	0.9	1.0	1.2	0.8	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	22.9	22.8	21.9	18.7	16.7	14.7	13.4	13.8	14.1	11.9	11.6	11.3	11.7	13.7	945.9
74,0°	21.2	20.7	19.7	15.9	12.8	11.1	10.4	10.6	11.1	9.0	8.6	8.3	8.5	13.2	959.1
75,0°	19.7	18.6	17.3	13.8	10.6	9.1	8.7	8.2	8.7	7.3	7.1	6.5	6.7	12.1	971.3
76,0°	17.0	15.9	14.3	11.8	9.5	7.7	7.2	6.5	6.7	5.4	5.0	4.6	4.6	9.9	981.2
77,0°	14.2	12.9	11.3	8.6	7.1	6.0	5.9	4.8	4.4	3.7	3.2	2.8	3.0	7.2	988.4
78,0°	11.1	10.3	9.0	6.9	5.4	4.5	4.0	3.4	2.9	2.3	1.8	1.6	1.6	4.6	993.0
79,0°	8.5	8.0	7.4	5.5	4.2	3.6	3.1	2.4	2.1	1.5	1.2	0.9	0.9	2.7	995.7
80,0°	6.3	5.8	5.5	4.3	3.3	2.7	2.2	1.8	1.5	1.0	0.7	0.7	0.5	1.6	997.3
81,0°	4.4	4.3	4.1	3.0	2.4	2.0	1.6	1.5	1.0	0.7	0.6	0.5	0.5	0.9	998.2
82,0°	3.0	3.0	3.2	2.2	1.8	1.4	1.2	1.0	0.9	0.5	0.5	0.5	0.5	0.6	998.7
83,0°	1.9	2.0	1.9	1.4	1.2	0.9	0.9	0.8	0.7	0.5	0.5	0.2	0.2	0.4	999.1
84,0°	1.4	1.7	1.2	0.9	0.8	0.7	0.7	0.6	0.5	0.5	0.2	0.2	0.2	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.7
87,0°	0.5	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.5	0.5	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	999.9
89,0°	0.6	0.5	0.5	0.5	0.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9040	66.0	68.9	67.4
95	238	252	8589	61.7	64.5	63.1
90	223	249	8148	57.8	60.3	59.0
85	208	247	7691	53.8	56.3	55.0
80	193	244	7227	50.0	52.2	51.1
75	179	241	6776	46.4	48.4	47.4
70	165	238	6317	42.9	44.6	43.8
65	152	235	5882	39.6	41.2	40.4
60	139	232	5439	36.2	37.8	37.0
55	126	228	4984	33.0	34.4	33.7
50	113	224	4520	29.8	31.0	30.4
45	101	220	4082	26.8	27.9	27.4
40	88	215	3597	23.6	24.6	24.1
35	77	210	3178	20.9	21.8	21.4
30	65	204	2713	18.0	18.7	18.4
25	54	197	2279	15.3	15.8	15.6
20	42	188	1797	12.4	12.8	12.6
16	34	180	1471	10.5	10.8	10.6

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9290	66.8	69.7	68.2
95	238	252	8812	62.4	65.3	63.8
90	223	249	8350	58.6	61.1	59.8
85	209	247	7904	54.8	57.3	56.0
80	194	244	7420	50.9	53.1	52.0
75	180	241	6953	47.2	49.4	48.3
70	167	239	6515	43.9	45.8	44.8
65	153	235	6030	40.3	42.1	41.2
60	140	232	5574	36.9	38.5	37.7
55	127	229	5107	33.8	35.1	34.4
50	114	225	4631	30.5	31.8	31.2
45	102	221	4184	27.5	28.5	28.0
40	90	216	3728	24.4	25.4	24.9
35	78	211	3263	21.5	22.3	21.9
30	66	205	2789	18.5	19.2	18.8
25	54	197	2309	15.5	16.1	15.8
20	43	189	1860	12.8	13.3	13.0
16	34	180	1488	10.7	11.0	10.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9180	66.4	69.3	67.8
95	238	252	8716	62.1	64.9	63.5
90	223	249	8262	58.2	60.7	59.4
85	208	247	7794	54.2	56.6	55.4
80	194	244	7351	50.6	52.8	51.7
75	180	241	6891	46.9	49.1	48.0
70	166	238	6425	43.3	45.2	44.2
65	153	235	5982	40.0	41.8	40.9
60	139	232	5497	36.5	38.1	37.3
55	126	228	5035	33.2	34.6	33.9
50	114	225	4600	30.3	31.5	30.9
45	101	220	4121	27.0	28.1	27.6
40	89	216	3668	24.0	24.9	24.4
35	77	210	3205	21.1	21.9	21.5
30	65	204	2735	18.1	18.8	18.5
25	54	197	2297	15.4	15.9	15.6
20	43	189	1851	12.7	13.2	13.0
16	34	180	1481	10.6	10.9	10.8

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08HB EAN: 4058352724460	LP number 59065_764
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	9040.0	66.0
5.0	9290.0	66.8
15.0	9180.0	66.4