

## Photometric test report

Family  
**Silica® 21**

Order number: **51MX31TBT9B**  
EAN: **4058352685389**

LP number  
**59310\_65**



**Version** Suspended luminaire, reflector, black, direct-/indirect distribution, narrow distribution,  $UGR \leq 16$  ( $L65 \leq 3000 \text{ cd/m}^2$ ), tunable white

**Lamps** LED 2700 K | CRI  $\geq 80$

**Controlgear** ECG-DALI

**Setting** individual position

**Rated values** Net luminous flux = 7770 lm  
Power consumption = 75.9 W  
Luminous efficacy = 102.4 lm/W

serial  
documentation  
**03.05.2023**


siteco

Luminous intensity in cd/klm

**C180-0**

**C270-90**

**Imax: 870 cd/klm**

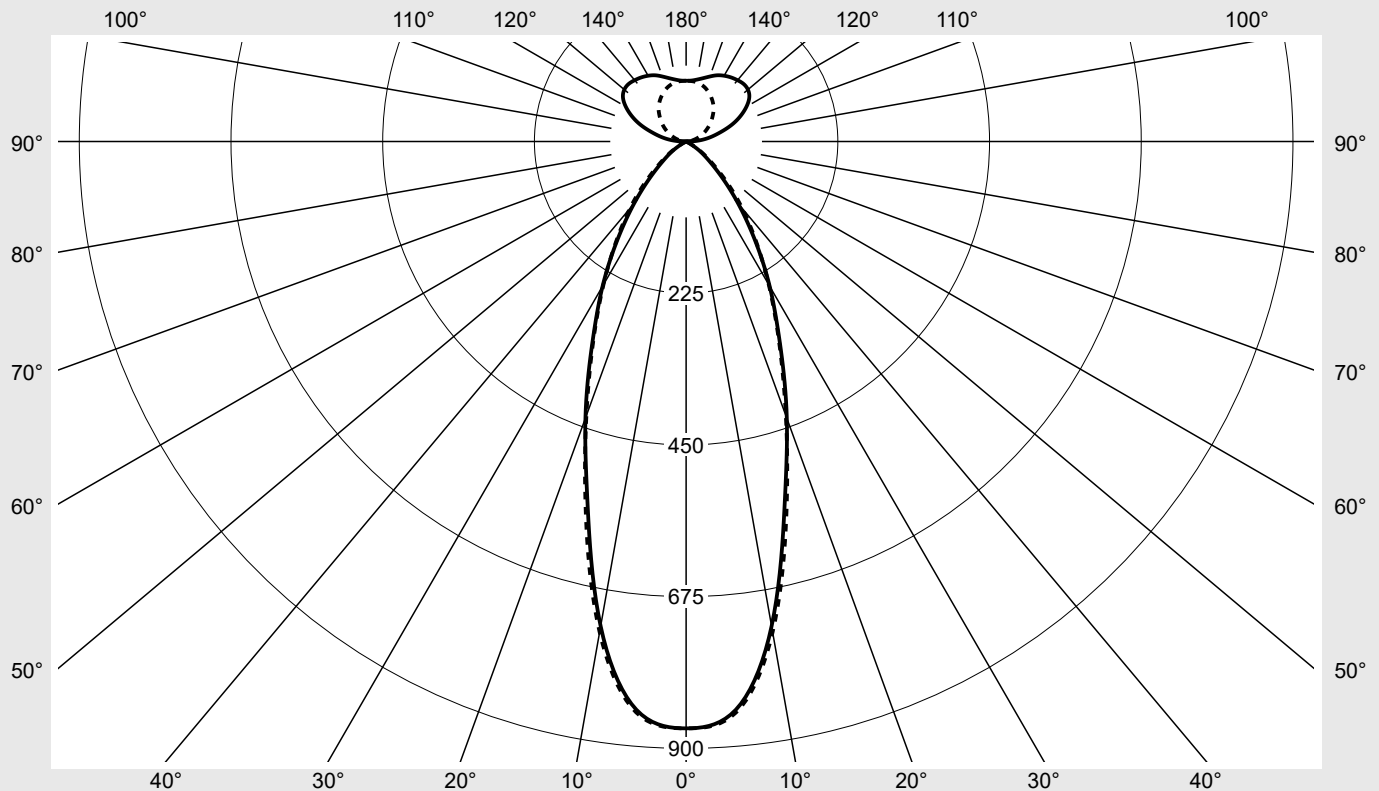

### Classifications

DIN 5040 C 7 2  
CIE N1=85 N2=99 N3=100  
N4=60 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  59.6%  
 $\phi_o$  40.4%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX31TBT9B</b> <b>EAN: 4058352685389</b>	<b>LP number</b> <b>59310_65</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	870.3	870.3	870.3	870.3	870.3	870.3	870.3	5.2	5.2
5°	846.0	847.0	846.3	847.4	849.1	850.7	849.9	40.5	45.7
10°	729.9	730.5	735.4	740.2	741.6	737.5	738.7	70.1	115.8
15°	563.5	566.8	573.7	583.4	582.7	575.8	574.3	81.6	197.4
20°	436.6	435.3	429.7	429.7	431.1	427.8	432.4	80.9	278.3
25°	328.9	328.2	319.1	311.5	316.6	319.6	325.6	74.2	352.5
30°	247.8	246.0	233.3	230.7	239.5	241.8	245.2	65.7	418.2
35°	177.2	177.8	169.0	168.0	180.3	183.5	180.9	55.4	473.6
40°	120.1	121.7	120.2	121.8	131.6	132.5	129.5	44.2	517.8
45°	75.2	76.8	78.8	83.5	89.3	88.1	85.7	32.1	549.9
50°	44.3	46.1	49.1	53.4	57.3	54.4	51.5	21.6	571.5
55°	25.2	26.5	29.2	32.4	34.1	31.0	29.0	13.5	585.0
60°	8.3	10.2	15.9	18.3	18.2	12.9	10.8	6.7	591.7
65°	2.5	3.2	5.0	9.4	5.8	3.6	3.2	2.5	594.2
70°	1.1	1.1	1.0	1.8	1.2	1.4	1.5	0.7	594.9
75°	0.2	0.3	0.3	0.4	0.4	0.4	0.3	0.2	595.0
80°	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	595.1
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	595.3
90°	5.7	5.5	5.8	5.6	3.2	1.1	0.4	2.2	597.5
95°	20.7	21.1	22.8	21.9	14.5	7.6	3.9	9.1	606.6
100°	36.3	37.4	38.2	34.3	23.7	13.6	9.0	15.3	621.9
105°	52.3	53.6	53.5	47.0	32.7	20.5	15.0	21.3	643.2
110°	71.5	72.2	68.8	58.2	41.9	27.5	21.3	27.0	670.2
115°	88.7	88.3	82.4	68.5	50.8	34.7	28.2	31.7	701.9
120°	103.3	102.0	94.0	77.2	59.3	41.7	35.0	35.1	737.0
125°	114.4	111.6	102.0	85.5	66.7	48.3	42.1	36.8	773.8
130°	119.7	117.2	106.2	90.6	72.3	55.0	49.2	36.8	810.6
135°	120.6	118.1	107.9	93.8	76.4	61.1	56.3	35.3	845.9
140°	118.7	116.7	108.1	95.8	79.5	66.7	63.6	32.8	878.7
145°	116.0	114.8	107.5	96.4	82.4	71.9	69.6	29.6	908.3
150°	112.6	112.0	105.4	95.3	84.5	76.9	75.0	25.9	934.3
155°	108.3	107.8	101.5	94.1	86.0	81.3	79.8	21.8	956.1
160°	102.5	102.2	97.5	92.7	87.4	84.6	84.2	17.4	973.5
165°	97.2	96.6	94.2	91.1	88.8	87.3	87.2	13.0	986.5
170°	93.2	92.7	92.0	90.7	89.7	89.4	89.3	8.7	995.2
175°	90.7	90.6	90.1	89.9	89.9	89.9	89.9	4.3	999.5
180°	90.1	90.1	90.1	90.1	90.1	90.1	90.1	0.5	1000.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX31TBT9B</b> EAN: <b>4058352685389</b>	LP number <b>59310_65</b>
-----------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.9	14.7	14.7	15.5	16.6	14.5	15.3	15.3	16.1	17.2
	3H	13.6	14.3	14.5	15.2	16.3	14.2	15.0	15.1	15.8	16.9
	4H	13.4	14.1	14.3	15.0	16.1	14.1	14.8	15.0	15.6	16.7
	6H	13.2	13.8	14.2	14.7	15.9	13.9	14.5	14.8	15.4	16.5
	8H	13.2	13.7	14.1	14.6	15.8	13.8	14.3	14.7	15.2	16.4
	12H	13.0	13.5	14.0	14.5	15.6	13.7	14.2	14.7	15.1	16.3
4H	2H	13.7	14.3	14.5	15.2	16.3	14.2	14.8	15.1	15.7	16.8
	3H	13.4	13.9	14.3	14.8	16.0	13.9	14.5	14.8	15.4	16.5
	4H	13.2	13.7	14.2	14.6	15.8	13.8	14.3	14.7	15.2	16.4
	6H	13.0	13.5	14.0	14.4	15.6	13.6	14.1	14.6	15.0	16.2
	8H	13.0	13.3	13.9	14.3	15.5	13.6	13.9	14.5	14.9	16.1
	12H	12.8	13.2	13.8	14.1	15.4	13.4	13.8	14.4	14.7	16.0
8H	4H	13.0	13.4	13.9	14.3	15.5	13.5	13.9	14.5	14.9	16.1
	6H	12.8	13.2	13.8	14.1	15.3	13.4	13.7	14.3	14.6	15.9
	8H	12.7	13.0	13.7	14.0	15.2	13.3	13.6	14.3	14.6	15.8
	12H	12.6	12.9	13.6	13.9	15.1	13.2	13.4	14.2	14.4	15.7
12H	4H	12.9	13.2	13.9	14.2	15.4	13.4	13.7	14.4	14.7	15.9
	6H	12.7	13.0	13.7	14.0	15.2	13.3	13.5	14.3	14.5	15.8
	8H	12.6	12.9	13.6	13.9	15.1	13.2	13.4	14.2	14.4	15.7

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1470</b> <b>B = 49</b>
------------------------	---	--------------------------------------	----------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		11474.0	11721.3	12017.3	12739.6	13620.0	13445.3	13076.3	
50°		7438.9	7736.1	8247.4	8962.0	9607.6	9129.8	8639.8	
55°		4739.9	4991.3	5489.7	6088.3	6405.1	5836.1	5459.3	
60°		1793.9	2204.9	3435.3	3941.0	3927.6	2792.4	2335.6	
65°		638.4	807.6	1266.0	2392.9	1473.3	918.4	827.0	
70°		338.4	360.2	305.3	579.4	393.0	455.4	474.4	
75°		89.6	125.5	123.4	163.4	163.4	162.5	133.0	
80°		32.3	35.4	42.2	50.9	64.0	77.7	77.7	
85°		505.0	506.2	500.0	476.5	459.2	465.4	474.0	

**Photometric test report**

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX31TBT9B</b> <b>EAN: 4058352685389</b>	<b>LP number</b> <b>59310_65</b>
------------------------------------	---	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

