
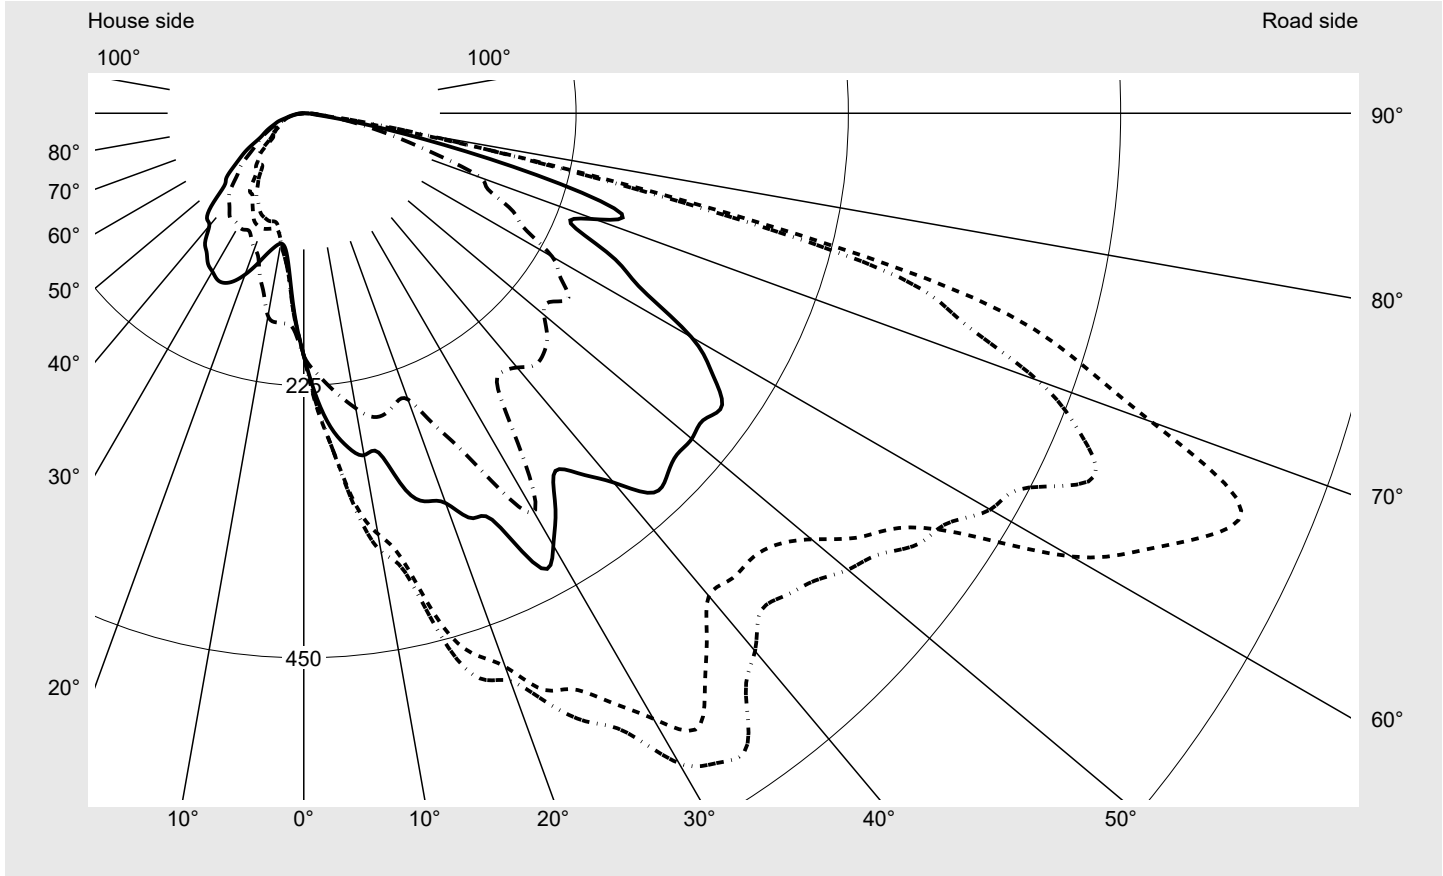


# Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> pedestrian crossing, asymmetric right distribution (PC-R) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 15540 lm Power consumption = 122.7 W Luminous efficacy = 126.7 lm/W	<b>serial documentation</b> <b>03.07.2023</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 835 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
--	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**      **siteco**

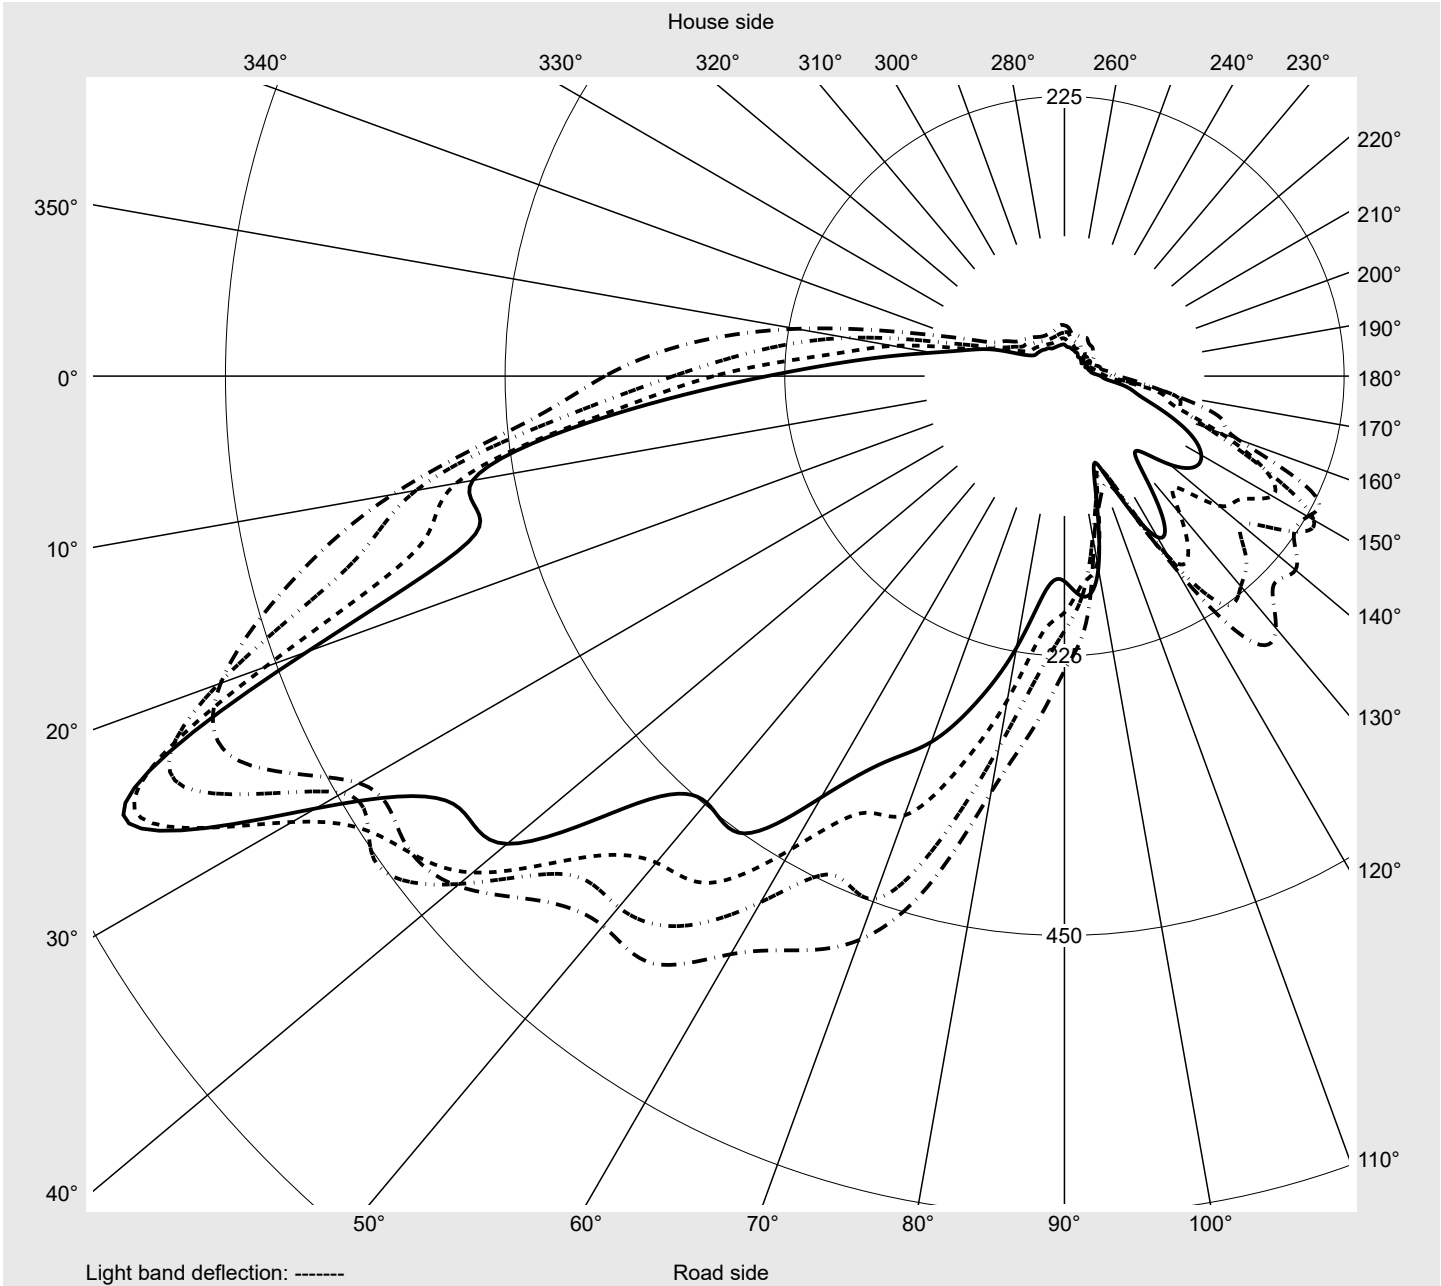

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> 58932_146
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
$\gamma$	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	234.1	234.9	237.3	240.8	241.6	242.8	241.0	237.7	235.3	233.0	232.8	231.6	231.0	228.3
5,0°	261.2	274.7	280.2	280.4	280.2	280.2	280.4	284.7	292.2	294.5	290.2	286.1	279.2	272.0
7,5°	278.1	285.5	296.7	312.2	320.2	325.7	330.8	334.2	337.7	341.6	344.7	337.3	324.0	305.1
10,0°	286.9	306.5	317.5	333.2	348.1	353.0	367.9	377.7	385.5	392.6	387.1	382.2	380.4	370.4
12,5°	287.5	311.6	325.9	341.4	366.3	378.3	389.1	397.1	396.5	401.8	410.4	399.3	380.2	365.9
15,0°	321.0	348.3	375.3	395.9	415.1	436.1	454.0	454.0	437.7	426.9	418.1	405.1	387.3	372.4
17,5°	336.3	373.0	394.9	420.2	442.0	468.7	490.4	492.8	496.7	479.3	459.7	426.5	401.4	377.7
20,0°	342.8	381.8	414.0	451.8	478.1	486.7	499.3	516.5	509.9	502.6	491.2	469.5	449.1	404.0
22,5°	362.2	388.5	420.0	462.8	495.7	515.2	527.7	528.3	523.0	522.2	517.5	523.0	492.8	457.3
25,0°	372.0	427.1	474.6	494.0	505.0	525.0	554.8	571.6	591.8	558.7	552.4	540.3	517.7	472.4
27,5°	423.4	473.2	493.6	496.1	514.0	548.5	576.5	613.0	634.2	640.7	614.4	566.1	555.0	523.2
30,0°	412.4	439.7	479.7	545.0	564.4	577.7	620.1	609.5	622.2	649.5	647.9	601.8	565.4	534.2
32,5°	387.1	449.1	500.6	557.3	582.8	603.4	636.5	654.6	661.1	673.8	686.7	657.7	608.3	579.3
35,0°	361.6	404.6	441.8	492.2	562.0	577.9	638.5	639.3	685.4	719.9	733.4	716.7	669.3	635.8
37,5°	375.7	403.4	418.1	448.7	498.1	547.1	599.9	660.1	690.1	741.8	773.8	772.4	729.7	678.3
40,0°	398.3	408.5	417.9	438.5	462.0	520.8	580.1	662.4	724.4	792.2	768.9	783.8	736.9	693.2
42,5°	425.5	426.5	428.3	445.5	482.8	522.4	558.7	635.0	718.5	747.5	786.8	754.0	716.7	689.7
45,0°	424.2	435.9	437.7	464.6	490.6	521.8	563.4	603.2	697.5	757.7	764.8	741.1	729.5	678.5
47,5°	417.9	426.1	448.5	480.4	508.9	528.3	572.0	596.5	654.4	723.6	744.4	731.3	718.9	674.4
50,0°	418.5	440.6	481.0	489.3	519.5	547.7	586.9	607.3	642.0	679.5	718.5	716.2	687.5	666.5
52,5°	416.3	441.6	490.4	507.7	546.3	576.1	598.9	628.7	649.7	657.1	685.6	686.0	659.5	636.5
55,0°	421.8	451.2	494.0	548.3	605.4	597.9	620.3	641.6	618.7	628.3	641.6	632.4	625.4	597.1
57,5°	400.2	460.2	545.7	614.8	680.9	647.5	630.5	633.2	637.3	604.8	599.9	608.7	567.1	557.5
60,0°	369.8	436.5	548.9	645.4	722.4	732.6	655.0	649.7	637.9	596.9	577.5	576.9	537.1	509.7
62,5°	314.7	412.4	529.7	597.7	724.4	781.7	670.9	678.1	635.6	566.9	557.9	540.1	488.7	442.6
65,0°	282.2	378.3	497.1	539.7	684.4	825.4	717.5	656.9	621.4	547.7	511.0	497.7	439.3	388.1
67,5°	239.2	368.1	483.4	490.6	648.3	835.4	695.6	600.1	585.4	486.1	447.9	449.1	391.4	342.8
70,0°	255.9	379.3	476.9	494.8	561.4	745.4	645.6	559.9	510.8	436.5	401.0	392.2	324.2	291.0
72,5°	275.1	380.6	448.3	489.1	547.9	663.8	568.7	464.8	396.5	364.2	319.4	302.8	259.4	217.5
75,0°	204.5	315.3	388.5	434.2	476.7	543.6	487.3	345.7	283.4	250.4	266.7	273.2	216.7	162.4
77,5°	112.2	180.8	224.7	278.1	266.1	275.5	248.5	199.0	172.8	169.0	193.4	205.1	156.5	116.9
80,0°	47.7	55.1	72.4	96.9	82.0	82.4	99.1	99.8	98.7	98.5	77.7	98.5	86.7	68.4
82,5°	12.2	14.1	15.9	18.4	21.4	23.5	31.6	41.6	37.8	35.7	33.9	40.0	41.6	41.4
85,0°	8.0	8.8	9.8	10.8	11.4	12.0	12.0	12.0	12.0	12.7	14.3	16.5	18.8	21.4
87,5°	3.5	5.3	6.1	6.7	7.1	7.6	7.6	7.3	7.1	6.7	6.5	6.5	6.7	7.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
$\gamma$	<b>Luminous intensity in cd/klm</b>													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	225.1	222.6	220.2	217.7	213.6	209.4	205.1	201.2	196.3	192.8	190.4	188.6	186.5	184.5
5,0°	261.8	248.1	237.5	230.8	225.1	221.2	214.1	207.7	197.7	189.8	183.4	176.7	172.0	166.9
7,5°	291.4	283.4	268.3	254.7	236.5	225.9	215.3	200.4	188.6	177.5	172.4	160.2	150.8	144.7
10,0°	346.3	318.7	294.3	265.1	247.5	228.3	210.8	195.7	181.0	165.1	157.1	150.6	145.7	141.4
12,5°	357.9	333.8	294.3	277.3	256.7	230.2	216.5	199.4	180.2	166.9	159.8	153.7	142.0	136.9
15,0°	347.5	323.4	302.6	272.0	257.5	241.8	220.8	196.9	178.8	167.7	161.6	150.4	141.8	139.0
17,5°	347.5	317.7	297.7	265.1	251.6	227.7	208.1	190.4	176.5	164.3	156.9	152.8	149.4	144.1
20,0°	367.1	328.7	323.0	282.6	251.6	242.2	212.4	192.0	171.8	163.7	157.5	154.7	154.7	151.4
22,5°	386.3	351.2	328.1	295.7	276.7	253.8	223.2	196.7	176.9	164.5	156.9	155.1	157.7	158.3
25,0°	430.8	386.3	341.0	317.9	305.9	270.6	231.6	194.7	173.2	164.7	157.9	157.1	160.6	165.1
27,5°	475.5	434.2	385.3	368.5	349.8	307.5	237.9	192.4	170.6	158.6	155.9	160.8	165.7	173.0
30,0°	518.7	476.5	411.6	377.3	380.6	291.0	227.9	183.2	164.5	158.8	157.3	164.1	173.2	181.2
32,5°	548.3	502.0	409.1	338.3	337.5	265.3	209.2	177.7	158.3	154.3	159.4	169.6	179.8	191.0
35,0°	594.0	514.6	418.7	327.3	280.8	235.3	187.3	167.9	154.9	154.5	162.4	175.3	189.8	200.0
37,5°	602.4	508.1	427.3	337.1	269.4	214.7	175.9	162.4	153.2	154.1	165.7	181.6	196.9	207.9
40,0°	627.3	540.1	456.3	351.8	274.3	202.4	169.4	158.1	147.5	151.6	167.1	188.3	205.7	218.8
42,5°	625.2	560.3	489.3	373.4	282.2	201.2	168.6	155.7	142.6	149.6	165.5	192.8	209.8	238.3
45,0°	648.9	555.9	494.4	372.4	280.4	206.1	165.7	149.8	138.6	144.7	165.9	191.8	223.0	243.9
47,5°	636.0	546.1	474.6	363.6	272.8	204.7	167.7	144.1	135.7	141.6	162.6	194.7	232.6	260.2
50,0°	596.1	513.8	447.3	340.6	259.2	212.8	169.6	137.9	130.0	136.3	161.8	204.1	251.0	260.4
52,5°	585.6	493.8	403.4	319.1	256.1	207.7	161.0	129.4	121.8	129.2	170.6	224.7	270.6	261.2
55,0°	576.9	485.3	382.6	305.5	266.7	222.0	163.2	124.5	114.7	136.9	177.9	239.6	270.4	266.5
57,5°	528.7	471.8	344.9	309.8	251.0	208.5	150.6	118.2	105.1	123.9	177.3	253.8	276.3	256.1
60,0°	482.8	425.3	340.0	283.8	237.1	199.4	136.5	107.5	93.5	108.2	178.8	259.6	264.7	237.9
62,5°	447.7	386.5	303.0	241.0	205.1	174.7	131.0	99.2	82.0	100.8	169.6	224.5	220.8	206.7
65,0°	376.1	326.1	264.9	208.1	190.2	167.7	152.6	104.1	79.0	104.9	169.2	173.7	144.3	126.5
67,5°	313.2	271.0	221.8	173.2	165.1	178.1	157.1	97.7	74.5	109.4	149.6	136.9	93.9	85.5
70,0°	255.1	226.9	179.4	146.5	155.3	166.1	127.1	83.3	73.9	92.0	116.3	106.1	67.3	73.3
72,5°	190.2	181.6	133.0	116.5	118.6	115.3	83.9	47.5	49.2	64.7	63.9	63.7	47.1	58.6
75,0°	129.2	128.4	107.5	92.6	85.1	67.1	44.3	31.4	29.6	46.1	35.7	38.8	38.4	40.6
77,5°	91.8	89.8	79.2	66.5	58.8	42.6	29.8	25.3	24.3	24.9	29.0	29.0	29.0	26.9
80,0°	64.7	61.4	54.9	43.7	38.0	27.1	21.4	20.6	19.0	19.0	20.6	19.8	18.4	19.4
82,5°	41.6	39.0	34.1	28.4	23.1	17.3	14.5	15.5	16.1	13.3	12.7	13.5	12.9	12.9
85,0°	22.0	20.0	17.8	15.3	11.6	8.8	7.1	8.4	10.0	8.4	7.8	8.2	8.0	8.0
87,5°	7.8	7.8	6.1	4.7	3.9	2.9	2.7	3.3	3.1	3.5	3.7	3.7	3.7	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
$\gamma$	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	182.8	181.8	180.8	179.4	176.5	173.5	171.2	169.0	167.9	167.9	168.6	169.2	169.8	169.8
5,0°	161.6	156.7	153.9	150.0	146.7	141.8	138.4	135.1	133.9	133.7	134.5	135.3	136.3	137.9
7,5°	139.8	134.7	131.8	129.4	125.9	121.2	118.8	115.9	113.9	113.5	115.3	117.1	118.8	119.6
10,0°	134.3	129.0	126.9	124.1	120.0	116.5	114.3	112.0	109.4	107.3	107.3	106.7	106.7	107.7
12,5°	132.2	131.0	128.1	127.9	124.7	122.4	119.8	117.5	113.7	110.2	107.5	105.1	101.6	99.0
15,0°	136.1	134.7	134.1	134.5	133.0	131.8	129.2	126.7	121.4	116.7	113.3	108.8	103.9	98.6
17,5°	142.2	142.2	143.0	145.7	145.5	144.9	142.0	138.6	131.8	125.5	120.8	114.5	107.7	100.2
20,0°	150.6	151.4	154.9	158.1	158.8	158.1	155.3	150.6	141.8	134.1	127.5	119.2	110.4	101.2
22,5°	159.4	162.8	168.3	171.8	172.8	171.0	166.9	161.0	150.0	140.8	132.2	121.6	110.6	100.2
25,0°	168.8	174.3	180.8	184.1	183.7	180.8	174.9	167.3	154.7	144.7	134.3	121.8	108.6	97.3
27,5°	180.2	185.9	191.0	192.0	190.2	186.5	180.2	170.4	154.9	142.8	132.0	120.2	103.5	91.0
30,0°	188.8	194.1	197.5	197.1	195.1	191.8	181.6	167.9	151.0	138.6	125.5	110.8	96.1	84.7
32,5°	198.5	202.6	204.7	207.7	201.8	188.6	176.5	163.2	147.3	135.7	125.1	104.5	88.4	79.4
35,0°	206.7	214.7	219.6	206.9	193.7	188.3	177.1	159.4	140.0	126.9	115.9	98.4	81.8	77.5
37,5°	217.5	227.5	211.6	202.2	199.0	181.0	164.3	149.0	133.9	122.2	109.4	89.4	77.1	66.1
40,0°	234.9	223.6	218.1	201.6	183.9	178.3	162.8	144.1	121.4	109.0	97.1	79.8	76.9	60.8
42,5°	235.9	228.7	210.0	199.0	191.4	167.9	150.0	136.7	118.4	103.3	87.7	76.5	68.2	58.2
45,0°	248.1	224.3	215.3	192.6	190.4	173.9	147.1	125.7	107.5	92.0	76.1	67.7	59.2	51.8
47,5°	241.4	231.0	211.4	191.6	175.5	160.2	143.5	110.4	89.4	80.0	65.9	64.7	51.2	48.0
50,0°	249.6	230.2	211.6	191.4	170.6	160.8	124.1	103.7	83.7	70.6	57.1	51.4	42.4	37.1
52,5°	248.3	232.8	197.9	184.3	201.4	155.9	119.0	99.8	73.7	56.9	48.8	43.5	40.6	31.8
55,0°	245.9	221.2	202.4	211.4	207.9	151.4	113.7	86.7	63.9	51.0	44.5	38.6	39.8	34.1
57,5°	251.4	216.7	208.5	242.8	194.7	141.6	100.8	70.0	54.9	44.3	36.1	31.4	33.5	30.0
60,0°	242.6	225.3	226.1	219.2	147.9	130.2	90.6	61.6	43.7	36.9	30.6	29.2	25.7	25.3
62,5°	185.9	216.5	231.6	178.6	123.0	96.9	90.4	51.2	37.8	31.8	25.9	23.7	21.6	22.2
65,0°	162.2	172.8	193.0	177.7	133.0	90.8	78.4	45.9	33.7	27.5	23.5	21.4	20.2	19.6
67,5°	110.6	127.5	127.1	112.6	86.9	63.7	51.2	34.9	29.2	23.5	21.2	20.0	19.2	18.6
70,0°	69.2	79.2	75.3	71.6	50.2	43.1	32.9	27.3	25.1	20.4	19.2	18.6	18.0	17.5
72,5°	55.3	49.8	49.6	34.9	29.6	26.5	25.1	23.1	21.6	17.5	16.7	16.3	15.9	15.7
75,0°	39.2	36.7	29.6	25.3	23.3	21.4	20.8	17.3	15.9	15.1	14.5	14.1	13.9	13.5
77,5°	25.5	23.5	22.9	19.8	18.4	16.9	15.7	13.7	12.7	12.0	11.6	11.4	11.2	11.0
80,0°	18.2	17.1	16.9	14.9	13.9	12.9	11.4	10.6	9.8	9.4	9.0	8.8	8.6	8.6
82,5°	12.7	12.0	11.8	10.8	10.0	9.2	8.6	7.8	7.3	6.9	6.7	6.7	6.5	6.3
85,0°	8.0	7.8	7.3	7.1	6.7	6.3	5.9	5.5	5.1	4.9	4.7	4.7	4.5	4.5
87,5°	3.5	3.5	3.3	3.3	3.1	2.9	2.7	2.7	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
$\gamma$	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	170.6	172.8	175.3	178.3	180.4	180.4	179.6	179.6	178.8	177.9	176.7	177.1	179.6	182.6
5,0°	138.4	140.0	142.8	148.4	156.1	165.1	167.7	168.1	169.0	169.2	170.2	172.4	174.5	176.7
7,5°	120.2	121.2	124.9	125.3	126.3	129.6	140.4	151.8	159.8	168.1	173.0	173.7	174.3	174.7
10,0°	108.8	109.6	112.6	116.9	120.8	122.6	124.9	130.6	147.7	156.3	159.6	165.1	170.2	168.8
12,5°	96.7	99.2	100.4	100.4	102.8	106.7	116.5	120.6	129.4	137.7	141.2	147.7	152.6	157.3
15,0°	92.6	88.2	85.9	85.1	85.9	87.7	90.2	103.3	110.4	119.6	124.9	128.8	139.8	143.2
17,5°	93.5	86.5	80.4	76.7	75.3	75.7	75.7	78.8	88.6	100.6	111.8	121.2	124.9	126.7
20,0°	92.4	84.7	77.7	72.4	69.0	67.7	69.4	72.6	77.5	84.3	94.3	111.0	119.0	118.8
22,5°	90.8	81.0	73.7	68.2	65.3	65.3	65.7	69.0	70.6	79.2	90.2	99.0	112.8	118.6
25,0°	86.9	77.3	69.2	63.7	62.0	62.6	65.3	69.4	71.6	76.1	86.7	97.1	107.1	116.3
27,5°	82.0	73.1	65.1	59.8	57.1	61.2	67.3	70.0	71.8	77.5	88.4	97.3	108.4	117.1
30,0°	78.4	71.8	61.4	57.5	56.9	59.8	66.5	71.0	73.5	77.7	89.6	100.4	107.5	114.3
32,5°	70.8	63.9	59.2	58.2	58.2	59.8	63.5	68.0	72.8	76.3	92.8	103.1	105.9	108.2
35,0°	64.5	58.2	57.5	58.8	60.4	60.4	63.5	63.9	71.6	75.9	86.7	100.8	105.9	104.5
37,5°	56.5	53.7	57.7	63.5	61.4	60.8	62.4	64.5	72.0	78.8	82.4	95.5	100.8	97.9
40,0°	55.3	53.3	58.4	60.8	58.0	58.2	61.8	66.7	73.3	77.3	81.4	90.8	95.9	84.9
42,5°	56.9	64.3	62.4	58.4	57.1	58.8	61.4	65.3	71.6	70.8	78.6	87.3	91.4	79.6
45,0°	52.2	68.4	68.0	58.4	55.7	58.0	59.0	59.6	65.1	65.9	71.0	80.4	82.8	73.3
47,5°	50.0	57.5	68.2	68.4	58.2	48.6	53.1	56.3	58.8	61.4	65.3	74.7	73.9	70.0
50,0°	42.9	48.4	61.0	81.4	66.3	52.4	49.6	52.2	55.1	59.4	58.6	65.7	68.4	63.3
52,5°	34.9	40.6	48.4	66.1	74.9	61.0	47.3	48.4	50.6	53.3	51.4	57.1	58.8	55.5
55,0°	31.2	31.6	40.4	56.3	65.9	71.4	55.1	44.1	45.3	46.5	44.7	52.2	50.6	50.8
57,5°	28.0	29.4	34.7	41.4	49.0	51.8	46.7	40.4	39.2	39.8	39.8	44.1	45.1	46.9
60,0°	26.5	29.2	30.0	32.0	32.4	33.5	35.5	33.9	34.1	34.1	34.7	39.0	40.8	41.0
62,5°	23.9	22.9	23.7	23.3	25.3	25.1	26.5	29.2	28.8	29.2	30.2	34.9	35.1	34.5
65,0°	21.4	19.8	20.2	21.4	20.8	22.2	23.5	24.3	24.3	26.3	26.7	28.4	30.2	30.2
67,5°	22.0	17.8	17.8	18.6	19.2	19.0	21.0	21.2	22.0	22.7	23.5	23.7	25.3	25.3
70,0°	19.8	16.5	15.9	15.9	16.1	16.7	17.5	18.4	19.2	19.6	19.4	20.2	21.0	21.8
72,5°	15.9	14.9	14.3	14.1	14.1	14.5	14.7	15.1	16.1	16.3	16.1	16.3	17.1	18.0
75,0°	13.3	12.9	12.4	12.2	12.2	12.2	12.4	12.4	13.3	13.3	13.1	13.3	13.5	14.1
77,5°	10.8	10.6	10.2	10.0	10.0	10.0	10.0	10.0	10.6	10.6	10.0	10.2	10.4	10.8
80,0°	8.4	8.2	8.0	7.8	7.6	7.6	7.6	7.6	8.0	7.8	7.1	6.7	7.3	8.0
82,5°	6.1	6.1	5.9	5.7	5.7	5.5	5.3	5.3	5.3	5.7	4.5	3.5	4.7	5.5
85,0°	4.5	4.3	4.1	4.1	3.9	3.7	3.5	3.3	3.3	3.1	2.9	2.4	2.9	2.9
87,5°	2.4	2.4	2.4	2.2	2.2	2.2	2.0	1.8	1.6	1.4	1.2	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 midi LED</b>	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> <b>58932_146</b>
---	--	--------------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
$\gamma$	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	184.5	186.5	189.2	192.8	196.3	199.4	201.4	204.5	206.3	209.0	210.8	215.1	219.2	222.0
5,0°	177.5	179.0	179.8	181.4	184.5	190.0	197.3	205.1	213.6	220.8	223.4	227.3	231.8	235.5
7,5°	169.8	173.2	179.8	185.7	188.3	190.0	196.3	211.6	219.0	225.3	230.6	238.1	243.0	249.4
10,0°	170.4	169.8	170.2	171.2	178.3	189.8	198.8	218.1	226.7	227.9	232.4	234.9	241.0	251.4
12,5°	156.1	158.3	158.6	163.7	164.7	170.6	179.8	202.0	206.9	218.1	220.8	226.1	234.1	244.3
15,0°	143.9	146.5	148.8	149.6	149.0	159.6	165.1	184.5	196.9	203.9	209.4	219.2	237.5	262.4
17,5°	129.4	135.7	139.2	141.8	146.9	155.1	172.6	179.6	182.0	191.8	205.9	222.0	241.6	262.4
20,0°	121.4	126.3	134.9	142.4	151.6	161.2	168.8	171.6	176.9	184.9	199.2	213.6	231.2	269.8
22,5°	123.3	131.0	134.3	141.2	149.4	152.6	156.5	156.7	161.4	175.7	190.8	212.2	236.3	267.9
25,0°	124.5	132.4	127.7	132.6	136.1	134.1	138.4	143.7	152.6	165.9	182.8	200.8	224.7	259.8
27,5°	118.4	122.6	119.2	119.4	119.8	123.9	129.6	136.7	145.1	158.8	177.3	203.9	231.8	262.4
30,0°	114.7	112.2	116.9	114.5	111.0	115.9	122.8	130.8	142.8	154.3	172.8	200.6	227.3	260.6
32,5°	106.7	100.8	106.1	105.9	103.1	107.3	115.1	125.3	135.5	150.8	173.7	197.9	229.2	259.8
35,0°	95.5	92.4	97.3	94.3	94.7	98.4	105.5	113.5	127.5	138.8	165.1	195.5	221.0	254.9
37,5°	84.5	84.1	87.1	85.7	85.7	87.9	94.5	105.3	116.9	127.9	150.6	194.3	232.0	262.4
40,0°	77.5	76.9	79.8	78.2	76.3	78.2	84.7	93.9	105.9	116.7	135.3	186.3	226.9	262.6
42,5°	72.6	70.8	71.4	71.2	70.2	71.0	76.3	84.1	96.5	109.8	129.0	168.1	231.8	274.3
45,0°	69.4	66.3	65.3	64.9	64.9	66.1	70.2	76.9	90.0	102.0	121.2	144.1	221.8	288.9
47,5°	67.7	62.0	60.2	60.2	60.0	61.6	65.9	72.6	82.6	97.3	112.0	127.5	203.9	287.3
50,0°	61.8	56.9	55.3	54.5	55.3	57.1	61.4	66.3	76.1	89.4	100.2	114.5	180.6	268.9
52,5°	56.9	51.8	50.2	49.4	50.0	52.4	56.1	60.8	67.5	79.0	89.6	101.0	144.5	255.7
55,0°	49.4	46.9	45.3	44.7	45.3	47.7	51.0	54.5	59.6	68.2	77.3	88.4	111.8	237.3
57,5°	43.7	41.6	40.6	40.4	40.8	43.3	45.9	48.8	51.8	57.3	64.9	74.5	108.2	196.1
60,0°	38.6	36.9	36.3	36.1	36.7	38.4	40.6	42.4	45.3	48.4	56.1	64.1	89.0	136.9
62,5°	33.3	32.4	32.0	32.2	32.6	34.1	35.7	37.1	40.0	41.4	47.1	54.5	70.6	106.5
65,0°	29.0	28.6	28.2	28.6	29.2	30.0	31.2	32.4	33.3	34.7	40.2	50.2	64.9	86.1
67,5°	24.9	24.5	24.3	24.5	25.9	26.3	27.3	28.0	28.6	29.4	33.5	43.7	62.9	81.0
70,0°	21.2	21.0	20.8	21.0	22.4	22.9	23.3	23.7	24.1	24.7	27.8	34.7	52.4	72.2
72,5°	17.3	17.3	17.5	18.2	19.2	19.8	19.6	19.4	19.8	20.2	23.3	28.2	37.5	61.8
75,0°	14.1	14.3	14.7	15.1	16.3	16.5	15.9	15.5	15.7	16.5	17.8	22.9	25.3	48.4
77,5°	11.2	11.2	11.4	12.0	13.3	13.3	12.9	12.0	12.0	12.7	13.3	16.7	20.0	33.3
80,0°	8.4	8.4	8.6	9.2	9.8	10.0	9.4	8.8	8.8	9.2	9.6	10.4	15.9	21.6
82,5°	5.7	5.5	5.7	6.3	6.7	6.3	6.1	5.9	5.9	6.3	6.5	6.9	7.6	8.4
85,0°	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.5	3.5	3.7	3.9	4.3	4.7	5.1
87,5°	1.0	1.2	1.2	1.4	1.4	1.4	1.6	1.6	1.6	1.8	2.0	2.2	2.7	3.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> 58932_146
--	--	-------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
<b>Luminous intensity in cd / Luminous flux in lm/klm</b>				
0,0°	200.4	200.4	0.3	0.3
2,5°	224.3	227.3	2.4	2.7
5,0°	241.6	251.2	4.8	7.5
7,5°	260.4	269.8	7.3	14.8
10,0°	263.6	273.8	9.9	24.7
12,5°	258.5	272.0	12.2	36.9
15,0°	281.2	295.7	14.9	51.8
17,5°	277.9	298.3	17.6	69.4
20,0°	299.6	312.6	20.6	90.0
22,5°	287.5	323.2	23.7	113.6
25,0°	300.6	328.3	27.0	140.6
27,5°	306.3	358.5	30.9	171.5
30,0°	304.0	357.3	33.9	205.4
32,5°	309.4	353.6	36.8	242.2
35,0°	303.6	339.8	38.9	281.1
37,5°	333.4	361.2	41.1	322.3
40,0°	346.7	366.5	43.3	365.6
42,5°	343.8	386.5	45.3	410.9
45,0°	333.6	405.9	46.9	457.9
47,5°	339.1	405.9	47.9	505.7
50,0°	336.7	398.9	48.6	554.3
52,5°	318.1	401.2	49.2	603.5
55,0°	303.2	390.0	49.8	653.4
57,5°	257.5	352.8	49.8	703.1
60,0°	219.0	302.4	48.9	752.0
62,5°	177.1	244.1	46.3	798.4
65,0°	140.0	193.2	43.5	841.8
67,5°	108.4	159.0	39.4	881.2
70,0°	93.5	158.6	35.2	916.3
72,5°	86.1	162.2	29.9	946.3
75,0°	57.7	90.0	23.8	970.0
77,5°	41.6	64.3	15.3	985.4
80,0°	24.1	29.0	7.8	993.2
82,5°	9.6	11.0	3.8	997.0
85,0°	5.9	6.7	2.0	999.1
87,5°	3.5	4.1	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> Streetlight 11 midi LED	<b>Order number: 5XC3F51Y08ME</b> <b>EAN: 4058352856505</b>	<b>LP number</b> 58932_146
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	15540	122.7	130.2	126.4
95	241	252	14745	115.1	122.2	118.6
90	229	250	14010	108.3	114.8	111.6
85	216	248	13215	101.1	107.2	104.2
80	203	246	12420	94.2	99.8	97.0
75	190	243	11624	87.4	92.6	90.0
70	178	241	10890	81.3	86.1	83.7
65	165	238	10095	74.7	79.2	77.0
60	152	235	9300	68.3	72.3	70.3
55	140	232	8565	62.5	66.2	64.4
50	127	229	7770	56.1	59.6	57.8
45	114	225	6975	50.0	53.0	51.5
40	102	221	6240	44.5	47.1	45.8
35	89	216	5445	38.7	40.9	39.8
30	76	210	4650	32.9	34.7	33.8
25	63	203	3854	27.2	28.8	28.0
20	51	195	3120	22.1	23.3	22.7
15	38	184	2325	16.7	17.5	17.1
13	33	179	2019	14.7	15.4	15.0