
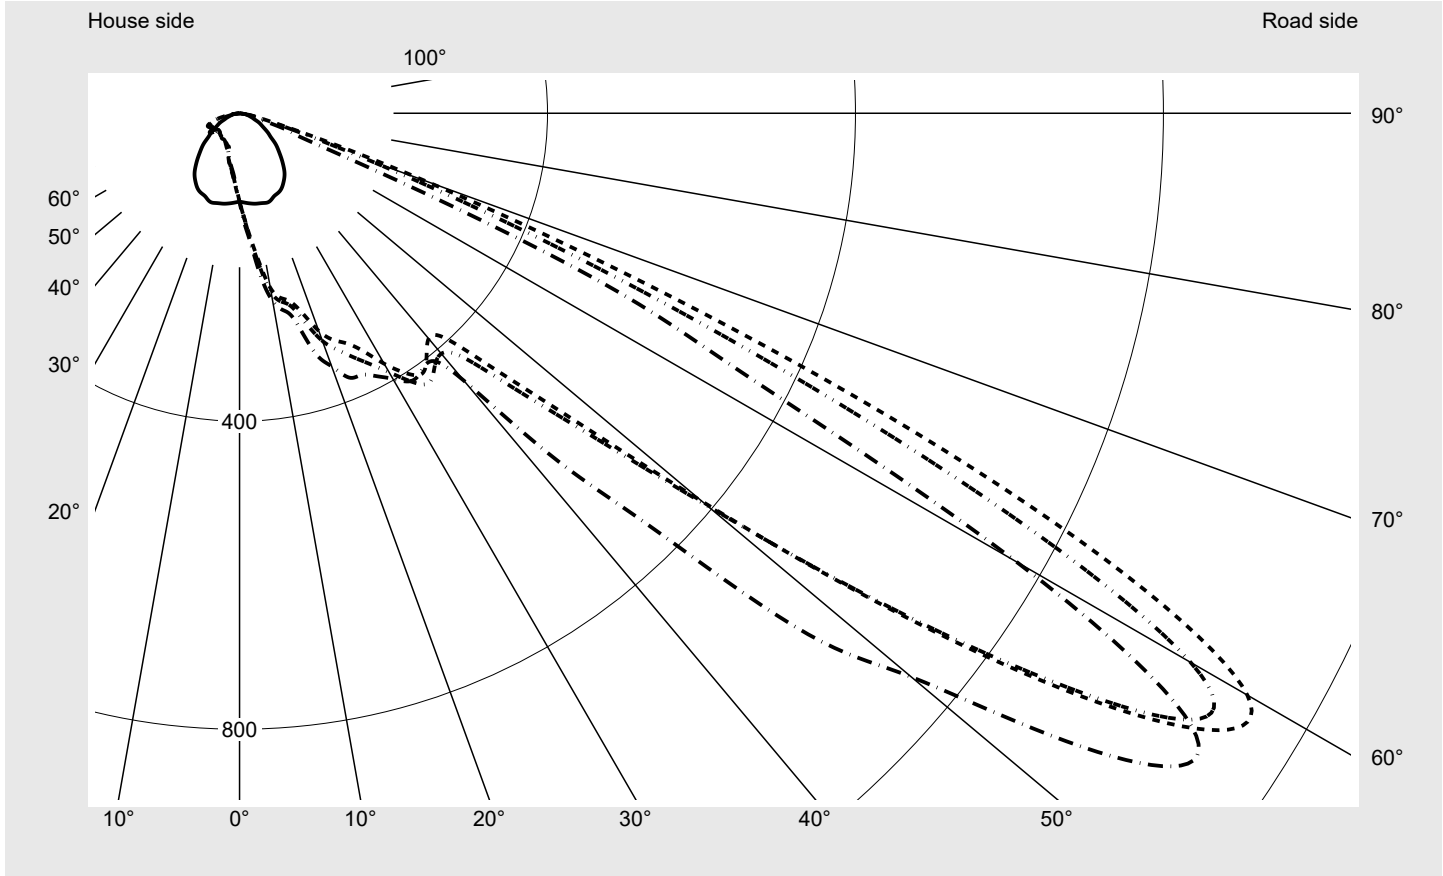


Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
	Version standard bracket Optic asymmetric distribution PL33T Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 91670 lm Power consumption = 707.9 W Luminous efficacy = 129.5 lm/W	serial documentation 21.07.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1512 cd/klm



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	293.1
Imax 80°	14.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
-----------------------------------------	------------------------------------------------------------------	-------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

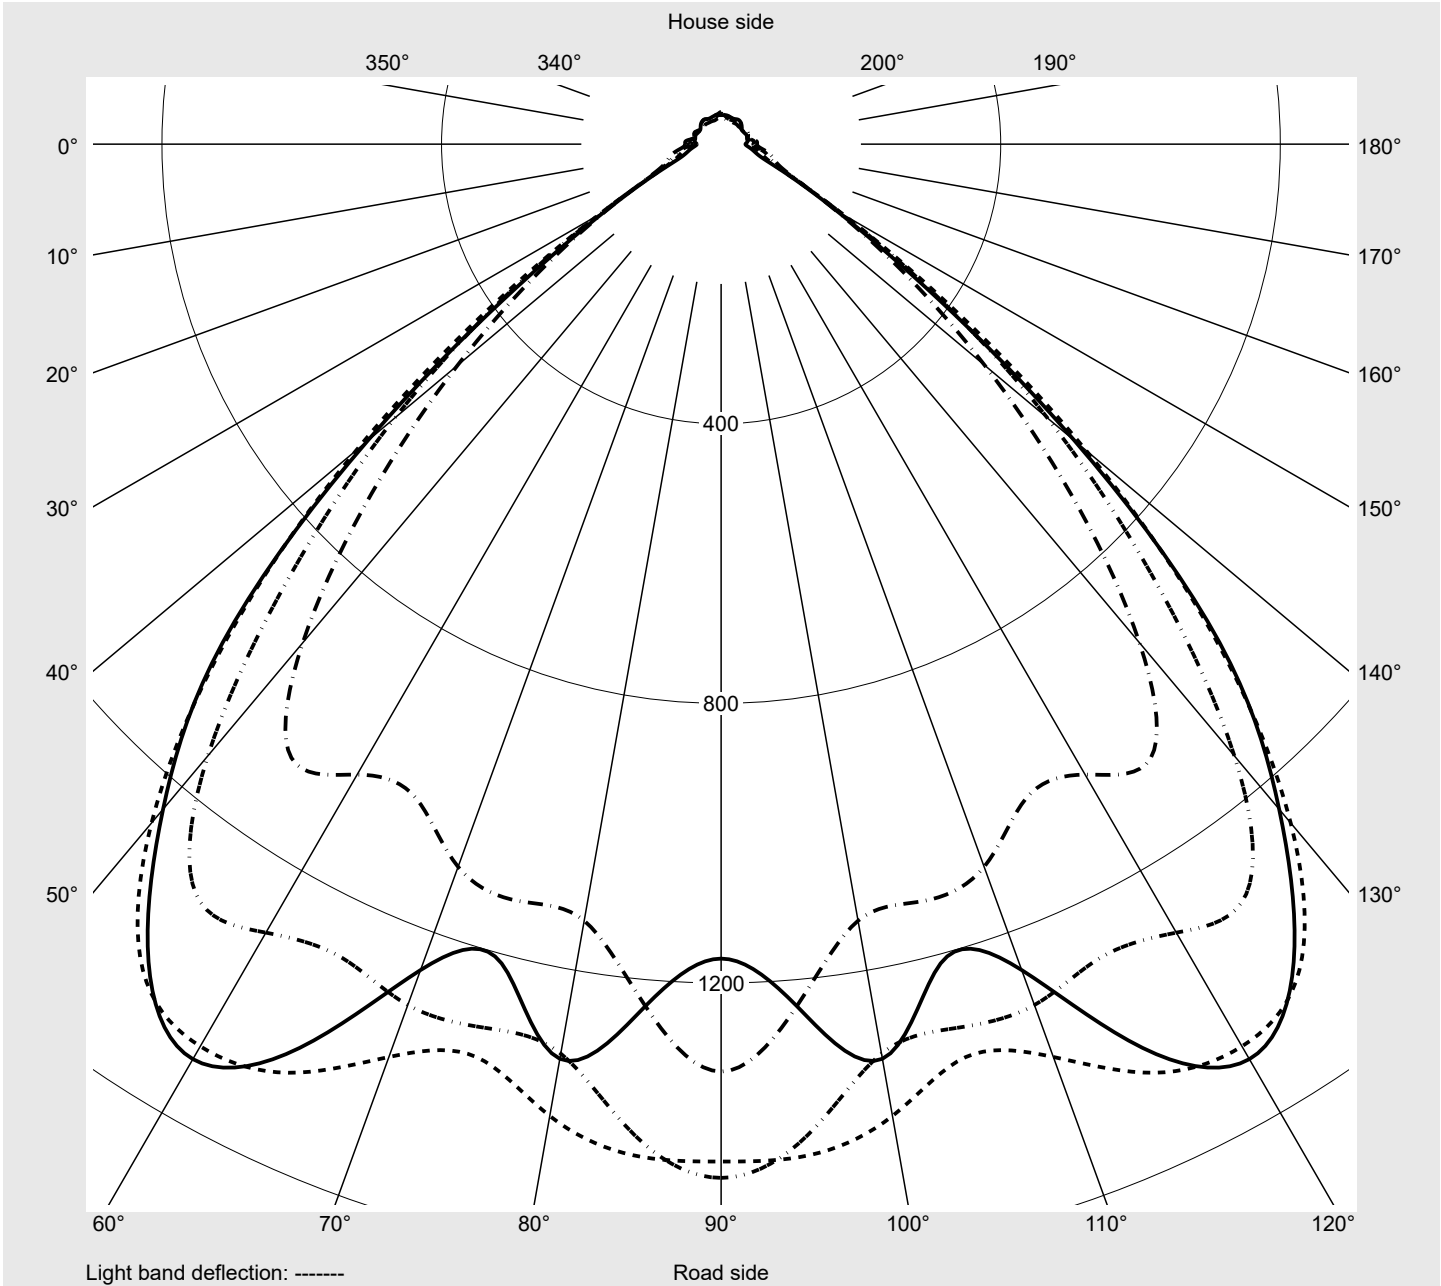

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
Table of values for luminous intensities		Maximum luminous intensity
siteco		


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	115.9	117.8	119.7	121.5	123.4	125.2	127.0	128.8	130.5	131.9	133.2	134.2	135.3
5,0°	117.1	121.3	125.6	129.8	134.2	138.3	142.4	146.4	150.1	153.5	156.8	159.9	162.8
7,5°	118.3	124.1	130.4	136.4	142.6	148.8	155.3	162.1	168.8	175.4	182.2	189.0	195.4
10,0°	119.3	126.8	134.5	142.4	151.3	160.9	171.1	181.6	192.6	203.6	214.1	223.0	230.3
12,5°	119.8	129.0	139.4	150.3	162.7	175.1	187.4	200.1	212.5	223.0	231.9	239.5	245.6
15,0°	120.7	131.9	144.3	157.2	170.3	183.2	196.8	209.8	221.1	230.4	238.2	245.7	253.1
17,5°	121.5	133.8	147.1	160.7	173.9	188.6	203.4	216.6	227.5	236.8	246.9	259.4	272.5
20,0°	119.8	133.6	147.5	161.2	176.3	193.1	210.5	225.9	238.6	250.8	266.8	284.5	300.8
22,5°	116.8	131.1	146.6	161.5	178.5	197.9	218.3	235.9	249.3	265.0	286.2	304.9	318.7
25,0°	115.3	128.1	142.9	160.9	179.9	199.8	221.6	240.6	253.5	271.5	293.5	312.2	329.9
27,5°	113.7	125.3	137.4	158.3	178.2	198.8	220.7	242.0	257.3	277.0	300.8	326.5	348.4
30,0°	110.6	122.0	132.5	153.9	175.5	195.6	219.8	248.1	269.8	294.7	324.9	355.7	375.6
32,5°	106.2	118.6	127.7	149.6	171.9	193.1	222.3	256.7	284.7	313.1	348.5	381.3	399.7
35,0°	101.5	113.9	123.3	144.5	166.4	191.2	224.8	260.7	291.8	321.5	358.8	390.8	413.1
37,5°	95.8	106.4	118.0	137.5	159.7	186.2	223.8	257.5	285.2	314.5	349.5	379.3	399.0
40,0°	88.4	96.3	109.5	127.9	150.5	179.8	220.9	250.8	275.3	305.2	341.3	364.0	382.1
42,5°	81.0	87.2	100.4	118.1	139.5	173.8	220.1	250.3	278.2	318.0	358.6	378.8	396.9
45,0°	73.5	78.9	93.2	111.7	132.2	169.5	220.8	256.6	301.2	362.9	416.9	458.3	472.5
47,5°	66.9	72.2	87.1	103.0	121.1	156.3	209.4	261.0	334.8	427.1	526.9	585.7	591.5
50,0°	59.9	61.5	73.3	85.5	98.0	128.1	188.1	269.9	388.8	533.6	698.5	798.8	784.9
52,5°	51.4	55.5	67.8	77.4	87.6	117.4	189.0	316.2	492.3	707.7	931.2	1071.9	1041.5
55,0°	46.1	50.5	62.6	70.6	82.4	114.7	200.7	369.8	609.3	871.2	1142.3	1309.8	1302.6
57,5°	40.2	43.9	54.3	62.0	75.5	111.5	202.5	390.4	681.2	999.1	1267.7	1442.4	1490.3
60,0°	34.9	38.5	45.2	52.9	69.0	109.8	191.1	356.9	660.3	1008.6	1242.1	1428.2	1511.5
62,5°	30.9	33.3	37.7	44.9	59.8	97.7	158.8	278.0	512.4	813.0	1008.6	1237.1	1295.6
65,0°	26.8	28.7	32.7	39.5	49.3	73.0	115.3	190.6	336.2	538.9	731.9	943.1	924.7
67,5°	21.4	22.4	26.6	32.5	40.3	52.1	74.3	113.3	187.7	307.0	459.4	575.1	534.1
70,0°	18.4	18.3	20.4	27.2	35.3	42.2	54.2	70.0	98.5	151.6	233.9	293.1	253.9
72,5°	15.1	15.5	16.6	21.9	28.1	33.3	38.7	45.1	54.2	70.0	91.0	111.2	98.9
75,0°	12.7	13.1	13.5	16.2	20.2	22.7	25.8	26.8	30.7	34.4	39.7	46.0	41.9
77,5°	10.1	10.8	11.0	12.3	14.2	15.1	15.9	16.2	17.8	19.7	22.3	24.9	23.6
80,0°	8.4	8.0	8.3	9.8	9.4	9.6	9.4	9.8	10.8	11.4	13.1	13.8	13.3
82,5°	7.0	5.9	5.3	6.3	6.1	5.6	5.1	5.5	5.8	6.2	7.1	7.3	6.9
85,0°	3.7	3.0	2.5	2.5	2.4	2.3	2.4	2.4	2.4	2.7	3.0	3.1	3.0
87,5°	0.8	0.7	0.7	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	136.2	136.9	137.5	138.0	138.4	142.8	114.0	112.3	110.6	109.1	107.4	106.0	104.6
5,0°	165.4	167.6	169.5	171.1	172.2	171.0	113.1	109.5	106.2	103.1	100.1	97.4	95.0
7,5°	201.0	205.3	208.7	211.4	213.4	215.0	112.7	107.4	102.5	98.0	94.0	90.4	87.2
10,0°	236.0	240.3	243.5	245.8	247.5	247.6	112.1	105.5	99.3	93.5	88.3	84.2	80.7
12,5°	250.6	254.2	257.0	259.0	260.5	262.0	111.2	103.1	95.7	89.2	83.4	79.0	75.2
15,0°	259.9	265.8	271.3	275.8	279.2	278.8	110.3	100.9	92.7	84.9	78.0	72.5	68.3
17,5°	285.5	297.2	307.1	314.2	319.2	326.4	109.2	97.1	87.1	79.6	73.0	67.5	63.4
20,0°	314.7	325.4	334.0	341.6	348.0	349.8	105.4	93.1	83.4	75.1	68.0	63.2	59.8
22,5°	332.6	346.4	355.5	362.2	367.7	371.6	103.2	90.0	78.9	70.2	63.8	59.2	54.4
25,0°	349.6	366.6	373.1	374.0	374.3	375.0	100.0	85.6	75.1	66.7	60.4	54.2	50.4
27,5°	367.3	384.2	392.0	390.8	385.7	384.9	95.1	80.6	71.4	63.5	56.4	50.9	48.3
30,0°	388.4	402.0	408.5	405.1	400.6	398.3	90.6	76.8	67.6	60.3	52.7	49.0	46.5
32,5°	412.6	421.2	419.2	410.7	409.5	412.7	86.7	73.1	63.8	55.8	50.5	47.5	45.2
35,0°	428.1	430.1	422.3	413.7	409.5	410.4	81.8	68.6	59.9	52.5	48.9	46.0	43.9
37,5°	416.0	425.5	416.3	408.9	404.6	406.4	77.3	64.4	54.5	49.5	47.0	44.4	41.9
40,0°	407.7	426.0	429.6	432.6	448.4	453.6	72.2	59.3	50.5	47.0	44.7	43.3	41.0
42,5°	430.0	468.1	493.4	521.0	564.8	614.1	67.5	54.0	47.4	44.9	43.5	41.8	40.0
45,0°	506.8	568.7	617.4	667.9	736.7	770.1	63.9	50.2	44.9	43.1	41.9	40.2	39.1
47,5°	619.7	699.6	761.5	806.6	904.7	1001.9	59.8	47.0	42.7	41.3	40.7	39.2	38.1
50,0°	792.7	875.4	920.3	947.6	1059.0	1139.0	55.3	44.0	39.8	39.7	39.2	37.8	36.6
52,5°	1032.6	1100.3	1120.9	1128.1	1238.5	1326.8	50.6	42.4	38.7	38.9	38.1	36.6	35.8
55,0°	1284.2	1310.6	1308.7	1321.2	1422.9	1478.9	47.3	42.0	40.0	41.0	41.2	38.2	37.2
57,5°	1465.8	1389.8	1352.1	1411.8	1451.9	1455.5	42.5	40.2	39.8	40.9	39.4	38.4	36.9
60,0°	1426.5	1257.4	1213.4	1328.7	1237.4	1165.2	37.7	37.8	38.2	38.5	37.2	36.4	36.3
62,5°	1124.2	952.3	945.6	1015.6	907.5	758.4	32.6	35.1	36.2	35.5	35.2	35.0	35.6
65,0°	735.3	603.2	614.9	613.5	555.9	513.8	29.2	32.1	33.4	32.9	32.3	33.3	35.5
67,5°	404.6	331.1	313.7	259.8	206.8	151.5	25.9	27.8	29.6	28.7	30.2	31.6	34.3
70,0°	183.2	158.3	140.3	92.9	73.1	71.8	20.7	21.8	22.6	24.0	27.9	28.8	31.4
72,5°	77.7	68.3	56.4	42.9	38.2	35.3	16.4	17.8	19.1	20.5	24.8	25.7	26.6
75,0°	37.3	34.1	29.2	25.1	22.7	23.4	13.2	14.6	15.6	17.3	20.5	21.5	21.5
77,5°	21.7	20.1	17.6	15.8	14.7	13.9	10.4	11.6	12.6	13.5	15.4	17.0	16.4
80,0°	11.9	11.2	10.4	9.9	9.5	9.7	8.1	8.6	9.0	9.9	10.8	12.4	12.4
82,5°	6.1	5.9	5.8	5.6	5.6	5.4	6.2	6.7	6.8	7.0	7.8	8.3	8.9
85,0°	2.9	2.9	2.9	2.8	2.8	2.9	3.3	3.0	3.5	3.3	3.2	3.5	3.7
87,5°	1.3	1.3	1.3	1.4	1.4	1.4	0.7	0.8	0.9	1.0	1.0	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	0.2	0.2
2,5°	103.3	102.1	100.9	99.9	99.0	98.3	97.7	97.3	97.0	96.7	96.6	1.4	1.6
5,0°	92.7	90.7	88.9	87.4	86.1	85.0	84.1	83.3	82.8	82.3	82.2	2.9	4.5
7,5°	84.5	82.1	80.1	78.4	76.9	75.8	74.9	74.3	73.9	73.6	73.5	4.7	9.1
10,0°	77.7	75.3	73.2	71.4	69.9	68.8	68.0	67.5	67.3	67.1	67.1	6.6	15.7
12,5°	72.0	69.2	67.0	65.2	63.9	63.0	62.6	62.4	62.2	61.9	61.7	8.5	24.2
15,0°	65.1	62.2	59.6	57.8	56.6	55.2	53.8	53.0	52.6	52.5	52.5	10.2	34.5
17,5°	60.4	57.7	54.7	51.7	50.6	50.0	49.1	48.2	46.8	46.1	45.9	12.3	46.8
20,0°	56.1	51.9	49.8	48.9	48.2	47.1	46.5	45.5	45.1	44.9	44.9	14.6	61.4
22,5°	50.6	48.6	47.4	46.3	45.4	44.5	43.6	43.1	43.1	43.1	43.1	16.8	78.2
25,0°	48.3	46.7	44.9	43.9	43.0	41.8	41.3	41.2	41.3	41.5	41.9	18.7	96.9
27,5°	46.3	44.4	42.8	41.9	40.1	39.8	39.8	39.8	40.1	40.8	40.9	20.7	117.7
30,0°	44.9	42.5	41.4	39.6	39.0	38.7	38.7	38.8	39.1	39.6	39.8	23.0	140.7
32,5°	42.8	41.6	40.5	38.7	38.0	38.0	38.1	38.4	38.9	39.3	39.7	25.3	166.0
35,0°	41.7	40.8	39.1	38.2	38.0	38.0	37.9	38.3	39.2	39.9	39.9	27.2	193.2
37,5°	41.2	40.4	38.9	38.2	38.2	38.1	38.2	38.3	38.4	38.7	38.9	28.2	221.3
40,0°	40.5	39.4	38.4	38.1	38.0	37.7	37.7	37.7	38.0	38.4	38.6	29.5	250.8
42,5°	39.5	38.5	37.4	37.2	37.0	37.0	37.1	37.1	37.4	38.4	37.8	33.0	283.9
45,0°	38.8	37.7	36.5	36.3	36.0	36.1	36.3	36.4	36.8	37.3	37.7	39.5	323.4
47,5°	36.8	36.2	36.2	35.5	35.2	35.2	35.5	35.7	36.4	36.1	40.5	47.9	371.2
50,0°	35.8	34.8	35.3	35.7	34.9	34.8	35.1	34.9	35.9	37.0	35.8	58.3	429.6
52,5°	36.1	35.5	35.9	35.8	35.4	35.3	35.3	35.2	36.5	37.5	37.4	73.4	503.0
55,0°	36.8	37.5	38.4	39.5	38.7	37.7	37.4	37.9	39.8	42.1	43.7	89.3	592.2
57,5°	37.8	40.4	41.8	42.8	41.3	40.1	40.2	41.0	42.5	43.9	46.0	98.7	691.0
60,0°	38.3	40.9	42.4	42.7	41.4	40.4	40.7	41.5	42.0	41.7	41.5	95.6	786.5
62,5°	38.5	41.4	43.6	42.8	41.5	41.1	42.1	42.4	40.9	39.6	39.1	78.4	865.0
65,0°	38.9	42.2	43.9	43.2	42.3	43.1	44.6	43.3	41.2	39.1	40.2	55.8	920.7
67,5°	38.1	41.4	42.4	42.4	43.0	44.6	44.7	43.1	40.9	40.6	40.3	33.0	953.7
70,0°	34.7	37.9	36.2	38.0	40.2	42.8	43.5	41.9	40.7	40.0	39.1	18.6	972.3
72,5°	27.3	28.5	30.5	33.0	36.3	38.1	39.3	37.1	35.0	34.4	30.3	10.5	982.8
75,0°	21.5	22.7	25.0	27.9	31.1	33.0	31.5	27.7	25.5	23.7	22.1	6.7	989.5
77,5°	16.4	15.9	18.5	19.9	24.2	24.4	23.3	21.2	17.3	13.8	12.4	4.5	994.0
80,0°	10.3	10.5	12.0	12.9	13.4	14.2	14.2	12.8	10.8	10.9	10.0	2.9	996.9
82,5°	7.6	7.7	8.7	9.1	8.6	9.6	9.3	8.4	7.7	8.0	8.0	1.9	998.8
85,0°	3.8	3.9	4.2	4.1	3.7	3.8	3.5	3.3	3.2	3.6	3.9	0.9	999.7
87,5°	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.8	1.9	1.9	2.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
----------------------------------	------------------------------------------------------------------	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	91670	707.9
95	237	251	87011	659.2
90	222	249	82616	616.0
85	206	246	77863	570.9
80	191	244	73218	528.5
75	177	241	68698	489.3
70	163	238	64068	450.2
65	150	235	59642	414.3
60	136	231	54933	375.3
55	123	227	50232	339.7
50	111	224	45788	306.8
45	99	219	41308	274.0
40	87	215	36756	240.8
35	75	209	32004	208.3
30	64	204	27651	179.0
25	52	196	22727	147.1
20	41	187	18131	118.0
15	31	177	13947	91.8
10	20	161	9184	63.1
5	9	132	4362	34.6
2	3	91	1689	18.1

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	88530	702.9
95	237	251	84238	654.3
90	220	249	79604	605.8
85	204	246	75110	560.8
80	189	243	70688	518.6
75	175	240	66387	479.4
70	161	237	61989	440.7
65	148	234	57674	405.1
60	134	231	53114	366.3
55	121	227	48567	330.9
50	109	223	44278	298.4
45	97	219	39876	265.9
40	85	214	35424	233.1
35	74	209	31172	203.6
30	62	202	26471	171.9
25	51	195	22040	142.9
20	40	186	17513	114.1
15	30	176	13402	88.2
10	19	159	8671	59.9
5	9	132	4325	34.3
2	3	91	1675	17.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779115F01BA EAN: 4058352899304	LP number 59254_59
----------------------------------	------------------------------------------------------------------	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	91670.0	707.9
25.0	88530.0	702.9