
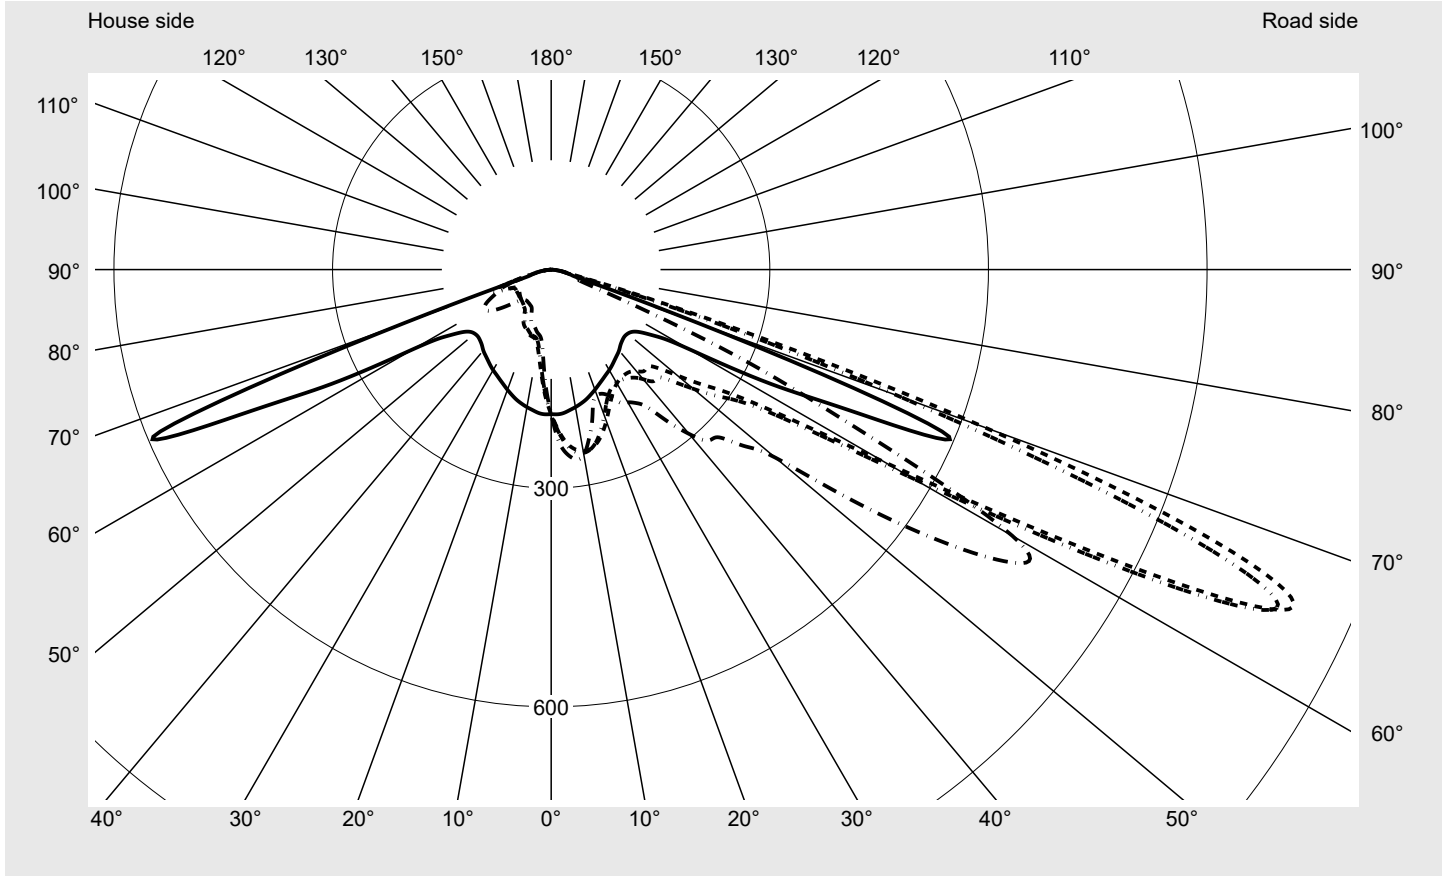


Photometric test report

Family Floodlight FL11 	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
	Version standard bracket Optic asymmetric distribution PL52 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 100220 lm Power consumption = 747.5 W Luminous efficacy = 134.1 lm/W	serial documentation 21.07.2023



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1105 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	749.2
Imax 80°	33.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

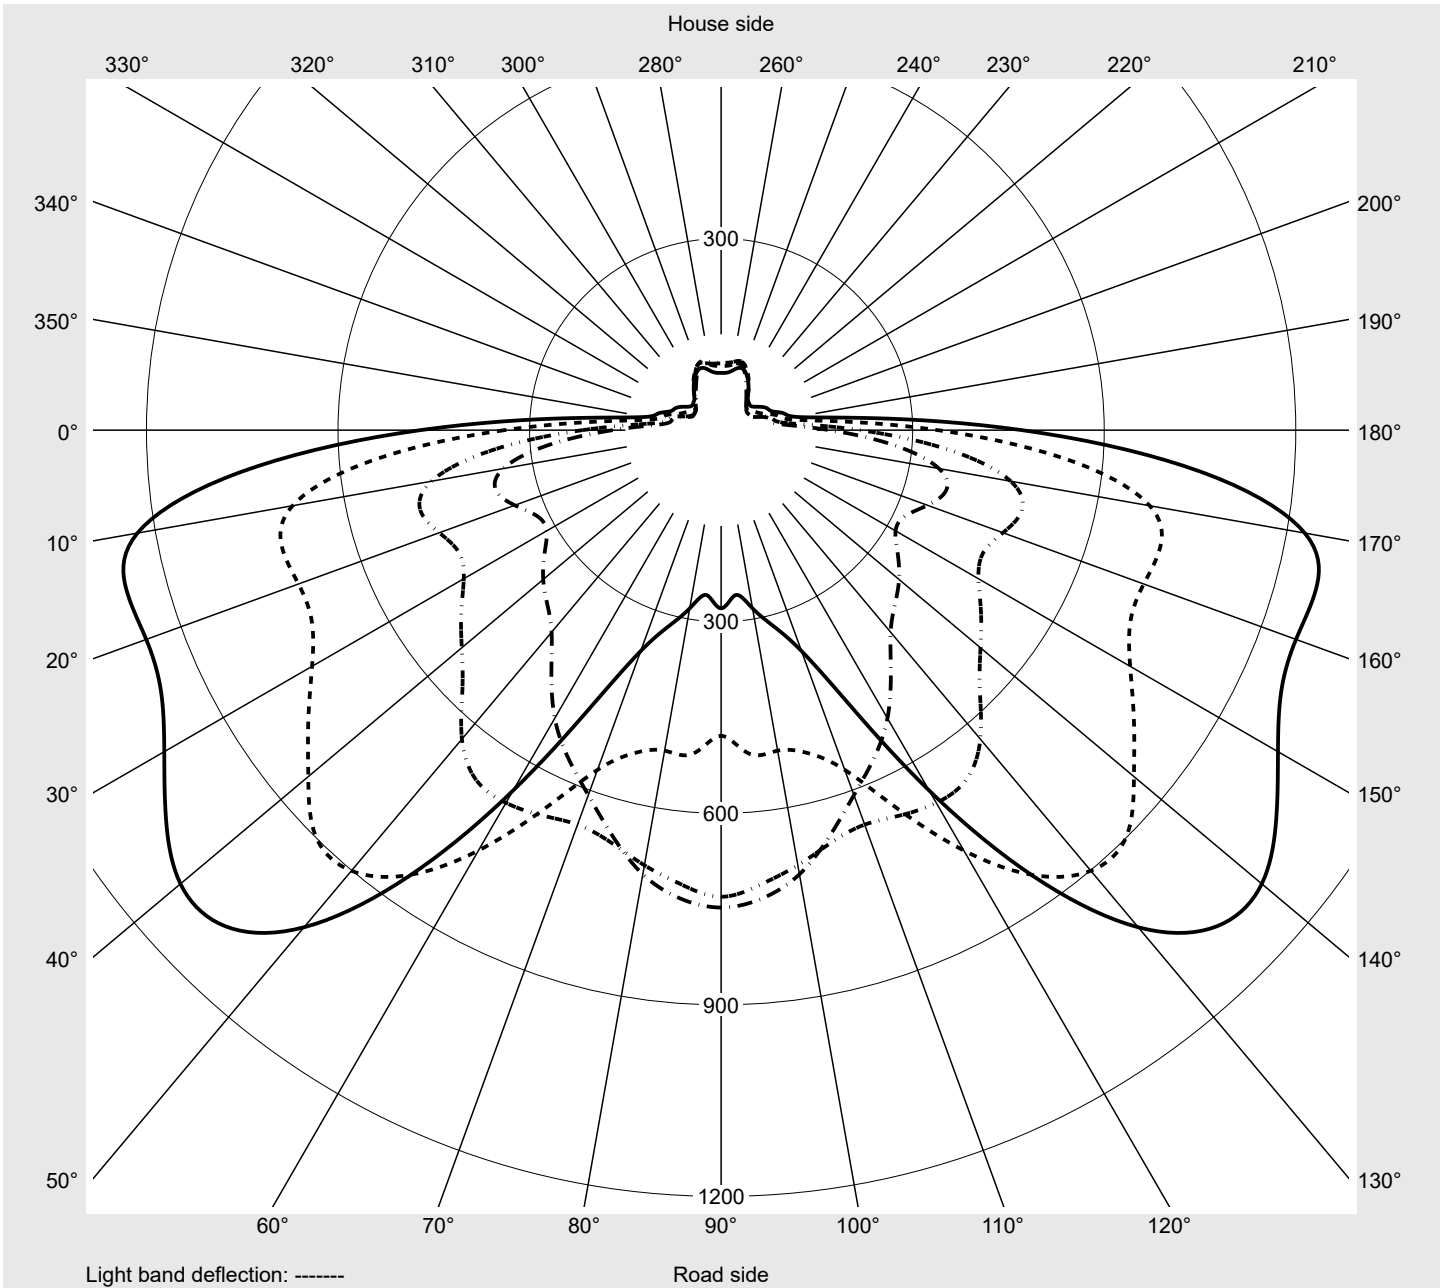

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
Table of values for luminous intensities		Maximum luminous intensity
siteco		


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	198.7	201.8	204.8	207.9	210.5	213.1	215.6	218.0	220.0	222.1	223.9	225.2	226.6
5,0°	197.5	203.9	210.1	215.9	221.0	226.1	230.5	234.7	238.2	241.5	244.4	246.7	248.8
7,5°	194.5	204.0	212.8	220.8	227.9	234.4	239.8	244.7	248.5	251.9	254.7	256.6	258.2
10,0°	191.6	203.6	214.7	224.5	232.6	239.7	245.3	249.8	253.0	255.4	256.9	257.5	257.7
12,5°	188.3	202.7	215.6	226.6	235.2	242.2	247.1	250.3	251.7	252.0	251.1	249.3	247.1
15,0°	184.6	201.1	215.3	227.2	236.0	242.1	245.5	246.5	245.4	242.6	238.7	234.1	229.5
17,5°	180.1	198.7	214.3	226.4	234.7	239.4	240.6	238.8	234.4	228.4	221.6	215.0	208.9
20,0°	175.5	196.0	212.6	225.0	232.3	235.0	233.5	228.5	221.2	212.9	204.8	197.9	192.3
22,5°	170.8	193.2	210.9	223.1	229.2	229.5	225.0	216.9	207.2	198.1	190.9	186.0	183.2
25,0°	166.5	190.8	209.5	221.4	226.0	223.6	216.2	205.7	195.3	187.5	183.1	181.8	182.9
27,5°	162.6	188.9	208.7	220.2	223.0	217.9	207.4	195.5	186.2	181.2	181.1	184.8	190.2
30,0°	159.3	187.6	208.7	219.9	220.9	213.2	200.6	188.1	180.3	178.9	183.9	192.4	200.6
32,5°	155.6	186.4	208.9	219.9	219.2	209.1	195.1	182.6	176.9	179.4	188.7	200.9	210.7
35,0°	151.7	185.0	209.5	220.7	218.2	205.8	190.5	178.9	176.0	182.1	194.6	208.8	219.8
37,5°	148.2	184.6	210.6	222.0	217.8	203.0	187.2	177.0	177.0	186.9	202.3	219.6	234.1
40,0°	144.9	183.9	212.1	223.7	218.0	202.1	186.1	178.0	182.1	196.4	216.1	237.1	256.9
42,5°	140.7	183.2	213.9	225.3	218.0	200.6	184.8	179.7	188.7	207.7	230.6	252.9	273.8
45,0°	137.8	184.0	217.3	228.0	217.6	196.8	179.6	176.1	187.8	209.2	234.2	258.2	278.2
47,5°	136.2	188.2	224.9	235.1	222.0	198.5	182.2	183.4	200.9	227.5	253.2	274.4	292.0
50,0°	136.9	195.8	237.5	249.0	234.0	209.5	195.4	202.1	226.1	254.5	277.3	293.1	307.0
52,5°	140.3	208.3	256.9	270.1	254.2	229.3	218.2	230.9	257.7	284.1	301.5	311.8	324.9
55,0°	150.0	230.6	289.0	303.9	285.4	259.2	250.9	267.2	293.3	315.0	328.7	342.9	377.4
57,5°	169.9	272.7	346.5	364.8	343.9	318.1	315.5	337.7	363.8	385.1	413.0	463.4	521.0
60,0°	217.5	360.1	460.5	487.4	469.7	453.2	465.4	496.9	530.3	572.9	631.6	668.8	674.0
62,5°	339.5	549.8	681.6	711.7	704.4	707.4	739.7	789.2	844.0	898.4	900.8	850.3	760.1
65,0°	471.4	756.3	928.3	964.4	958.1	967.9	1007.0	1061.4	1105.4	1098.6	1016.3	853.0	651.7
67,5°	580.5	784.3	996.7	1047.0	1038.0	1032.0	1044.8	1049.4	1010.6	915.8	763.6	561.5	403.9
70,0°	214.6	443.1	619.1	717.7	749.2	739.5	731.6	704.1	633.2	506.4	378.9	314.3	250.3
72,5°	47.8	71.8	92.0	126.4	207.8	269.5	281.4	276.1	237.2	192.6	177.4	155.1	127.9
75,0°	28.7	31.6	33.7	36.4	44.1	64.2	72.8	73.1	64.5	40.1	61.7	56.1	51.5
77,5°	21.1	22.2	23.2	24.3	26.0	28.7	29.0	28.1	26.6	26.4	28.3	28.1	28.6
80,0°	16.3	15.8	15.8	16.5	17.1	18.1	17.9	17.5	17.5	17.8	17.8	18.0	22.8
82,5°	10.4	9.7	9.8	10.2	10.3	10.5	10.7	10.3	10.3	10.3	10.1	10.1	11.6
85,0°	5.3	4.8	4.8	4.9	4.9	5.0	4.9	4.8	4.6	4.3	4.2	4.0	3.9
87,5°	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	227.8	228.9	229.7	230.2	230.5	235.4	195.7	192.6	189.5	186.4	183.3	180.4	177.7
5,0°	250.5	251.8	252.8	253.5	254.0	254.3	191.1	184.3	177.5	171.0	164.5	158.5	153.0
7,5°	259.5	260.4	261.0	261.4	261.7	262.5	184.9	174.8	164.9	155.3	146.2	138.0	130.6
10,0°	257.6	257.2	256.7	256.3	256.1	258.1	179.0	165.9	153.2	141.4	130.7	121.5	113.7
12,5°	244.8	242.5	240.5	239.0	238.3	238.7	172.8	157.2	142.3	129.2	118.1	109.5	103.1
15,0°	225.2	221.2	218.1	215.8	214.7	216.7	166.7	148.8	132.7	119.2	109.2	102.4	98.4
17,5°	203.8	199.6	196.5	194.5	193.6	191.8	159.7	140.2	123.3	110.8	102.7	98.4	96.4
20,0°	188.3	185.5	183.8	182.9	182.7	183.4	153.1	132.2	115.3	104.2	98.4	96.1	94.5
22,5°	181.8	181.2	181.4	182.1	183.0	184.5	146.4	124.6	108.3	99.1	95.4	93.6	91.3
25,0°	184.8	186.5	188.3	190.5	192.4	192.4	140.5	118.0	102.8	95.7	93.1	90.8	88.2
27,5°	194.5	196.9	199.1	202.3	204.3	206.0	134.7	111.9	98.3	92.9	90.5	87.9	85.5
30,0°	205.5	206.3	207.7	211.1	211.7	210.4	129.5	106.9	94.7	90.7	88.0	85.6	81.4
32,5°	214.6	214.1	215.3	219.3	217.5	217.2	124.3	101.9	91.5	88.2	85.5	82.6	74.4
35,0°	224.3	225.8	231.4	237.6	233.6	230.9	118.8	97.1	88.5	85.5	81.9	75.5	67.3
37,5°	242.5	248.6	257.2	261.7	261.4	262.9	113.6	92.6	85.7	83.0	75.6	67.8	63.3
40,0°	269.5	277.8	286.8	292.2	294.3	294.4	108.8	88.8	83.0	80.1	67.9	62.7	61.4
42,5°	288.1	296.4	305.4	312.4	315.9	318.3	103.7	85.1	80.7	76.5	62.5	60.1	59.5
45,0°	292.4	300.4	310.5	319.5	324.1	325.6	99.1	81.9	78.6	73.3	59.5	58.0	57.6
47,5°	307.0	315.2	326.9	341.7	349.2	358.0	95.5	79.4	76.9	70.2	57.2	56.1	56.1
50,0°	321.7	336.5	356.9	382.5	399.0	401.3	92.9	77.8	75.5	67.2	54.8	54.3	54.6
52,5°	349.2	386.2	431.6	478.4	507.7	518.9	91.7	76.8	74.7	64.5	52.7	52.4	52.9
55,0°	434.8	497.1	555.8	609.9	642.5	646.0	93.1	77.2	74.5	62.1	51.1	50.6	51.3
57,5°	566.7	608.2	657.7	706.3	736.2	747.6	99.1	79.8	75.3	60.4	50.3	49.1	49.8
60,0°	665.6	657.4	668.3	691.9	714.2	730.8	115.8	86.0	79.0	63.0	52.8	49.8	49.2
62,5°	654.2	566.1	523.5	509.6	508.8	478.7	166.6	102.4	89.9	74.1	64.4	58.1	53.1
65,0°	473.0	368.1	318.0	283.4	259.2	279.0	220.3	119.6	101.5	85.7	80.1	72.9	63.9
67,5°	303.2	234.6	127.7	94.1	83.6	72.6	142.4	96.1	89.7	82.1	80.7	77.1	70.6
70,0°	193.4	146.5	58.3	44.8	44.0	44.3	56.4	49.2	49.6	52.8	55.7	59.0	59.5
72,5°	97.7	77.0	42.5	37.4	37.6	37.8	32.8	32.2	32.2	33.2	34.5	37.6	39.2
75,0°	45.7	41.4	34.4	32.5	31.6	32.6	25.8	25.7	25.6	26.2	27.0	28.4	30.1
77,5°	30.7	31.6	27.6	23.6	22.4	21.6	20.5	19.9	19.4	20.0	20.3	21.3	22.5
80,0°	33.4	29.1	19.0	15.7	14.8	15.4	16.2	14.2	13.7	14.1	14.3	14.8	15.0
82,5°	15.5	14.5	10.2	8.8	8.3	8.3	9.7	8.6	8.7	8.8	9.0	8.8	8.7
85,0°	3.8	3.6	3.5	3.4	3.4	3.6	4.5	4.4	4.4	4.4	4.3	4.1	3.9
87,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.7	1.7	1.6	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	0.3	0.3
2,5°	175.3	172.9	170.7	168.9	167.2	165.8	164.6	163.7	163.1	162.5	162.7	2.4	2.7
5,0°	147.8	143.2	139.0	135.4	132.4	129.7	127.5	125.9	124.7	124.0	123.9	4.6	7.3
7,5°	124.0	118.4	113.7	109.9	106.8	104.4	102.6	101.3	100.4	99.8	99.6	6.7	13.9
10,0°	107.5	102.7	99.2	96.7	95.0	93.7	92.9	92.3	91.9	91.6	91.5	8.6	22.5
12,5°	98.7	95.8	94.0	92.7	91.7	90.8	90.0	89.3	88.8	88.4	88.2	10.4	32.9
15,0°	96.0	94.3	92.8	91.0	89.2	87.6	86.2	85.2	84.3	83.8	83.6	11.8	44.7
17,5°	94.9	92.9	90.4	88.0	85.9	84.1	82.6	81.5	80.7	80.1	79.9	13.0	57.8
20,0°	92.4	89.9	87.5	85.5	83.6	81.9	80.4	79.2	78.5	78.0	77.8	14.2	72.0
22,5°	88.9	86.9	85.1	83.6	81.4	77.6	75.0	73.4	72.6	72.2	72.0	15.3	87.3
25,0°	86.1	84.2	82.4	78.8	74.1	69.7	66.1	64.7	64.0	63.6	63.4	16.5	103.8
27,5°	82.2	78.7	74.9	70.8	66.1	63.3	61.7	60.3	59.2	58.5	58.2	17.8	121.5
30,0°	75.0	70.4	67.7	65.0	63.5	62.1	60.4	58.9	57.8	57.0	56.7	19.1	140.7
32,5°	67.2	65.2	64.1	63.1	62.1	60.8	59.3	57.9	56.7	56.0	55.6	20.5	161.2
35,0°	64.0	63.3	62.4	61.6	60.9	59.8	58.5	57.2	56.2	55.4	55.0	22.1	183.2
37,5°	62.5	61.7	61.0	60.3	59.8	59.1	57.9	56.7	55.7	54.8	54.4	24.0	207.2
40,0°	60.8	60.3	59.7	59.3	59.0	58.5	57.8	57.0	56.2	55.3	54.8	26.3	233.5
42,5°	59.2	59.0	58.8	58.6	58.6	58.5	58.4	58.3	57.9	57.0	56.3	28.4	261.9
45,0°	57.9	58.2	58.3	58.5	58.8	59.5	60.4	61.2	61.4	60.6	59.9	29.9	291.8
47,5°	56.9	57.7	58.4	59.0	60.2	62.1	64.4	66.4	67.2	66.9	66.3	32.5	324.2
50,0°	55.7	57.2	58.7	60.5	63.0	66.5	71.0	74.6	76.0	76.1	75.8	36.1	360.3
52,5°	54.5	56.6	59.2	62.5	67.0	73.2	80.5	85.6	87.0	87.1	86.9	41.8	402.1
55,0°	53.2	56.1	60.0	65.4	72.4	81.8	91.8	97.7	97.9	97.6	97.6	50.1	452.3
57,5°	52.1	56.0	61.4	68.9	78.7	90.8	102.4	107.7	106.0	104.7	104.5	61.7	514.0
60,0°	51.3	55.7	62.6	72.2	83.7	96.6	108.4	112.2	108.5	106.0	105.6	76.9	590.9
62,5°	52.3	56.2	63.8	74.5	86.6	98.6	108.3	109.7	104.4	101.2	100.6	94.5	685.4
65,0°	59.7	61.2	65.1	74.3	85.2	94.9	101.5	100.6	94.0	90.2	89.6	105.6	791.0
67,5°	70.8	76.7	70.4	71.4	78.8	84.4	87.9	86.4	81.3	78.6	78.3	95.5	886.4
70,0°	69.5	84.7	76.7	65.7	68.6	73.5	76.3	74.7	70.1	67.6	67.4	61.9	948.4
72,5°	47.4	61.9	61.1	56.0	57.7	60.7	61.9	59.8	55.2	53.4	54.3	24.8	973.2
75,0°	31.9	36.3	40.3	42.5	47.6	45.9	45.5	43.5	40.1	38.7	40.0	10.9	984.1
77,5°	23.8	26.0	28.0	29.4	31.1	32.7	33.1	31.2	28.5	27.1	28.0	7.0	991.0
80,0°	15.7	16.7	17.9	18.7	18.9	19.5	19.8	18.6	17.3	16.5	16.4	4.8	995.8
82,5°	8.8	9.1	9.6	9.4	9.7	10.0	9.5	8.6	7.8	7.4	7.3	2.7	998.5
85,0°	3.9	3.8	3.7	3.5	3.2	2.9	2.8	2.8	2.7	2.7	2.7	1.1	999.6
87,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	100220	747.5
95	237	251	95215	695.8
90	221	249	90291	647.8
85	205	246	85045	599.3
80	191	244	80316	557.4
75	176	241	75097	513.2
70	162	238	70063	471.9
65	149	234	65277	433.6
60	136	231	60281	395.7
55	122	227	54942	355.1
50	110	223	50056	320.3
45	98	219	45089	285.7
40	86	214	40014	251.3
35	75	209	35281	219.1
30	63	203	30087	185.6
25	52	196	25081	154.6
20	41	187	20010	123.8
15	30	176	14889	93.4
10	20	161	10132	65.9
5	9	132	4796	35.9
2	3	91	1845	18.6

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	96720	742.3
95	236	251	91884	687.8
90	219	249	87001	636.8
85	203	246	82068	588.8
80	188	243	77235	544.4
75	174	240	72592	503.0
70	160	237	67788	461.8
65	146	234	62800	421.1
60	133	230	58111	383.1
55	120	227	53162	346.0
50	108	223	48374	311.4
45	96	218	43540	277.2
40	84	213	38633	242.4
35	73	208	33922	211.4
30	62	202	29230	180.7
25	51	195	24316	150.2
20	40	186	19323	119.7
15	29	175	14294	89.7
10	19	159	9548	62.5
5	9	132	4754	35.5
2	3	91	1831	18.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779116D01BA EAN: 4058352822777	LP number 59241_31
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	100220.0	747.5
25.0	96720.0	742.3