


# Photometric test report

<b>Family</b> <b>Streetlight 11 mini LED</b>	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> <b>58293_310</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ - DALI2 <b>Rated values</b> Net luminous flux = 8450 lm Power consumption = 58.1 W Luminous efficacy = 145.4 lm/W	<b>serial documentation</b> <b>27.07.2023</b>



**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 652 cd/klm**

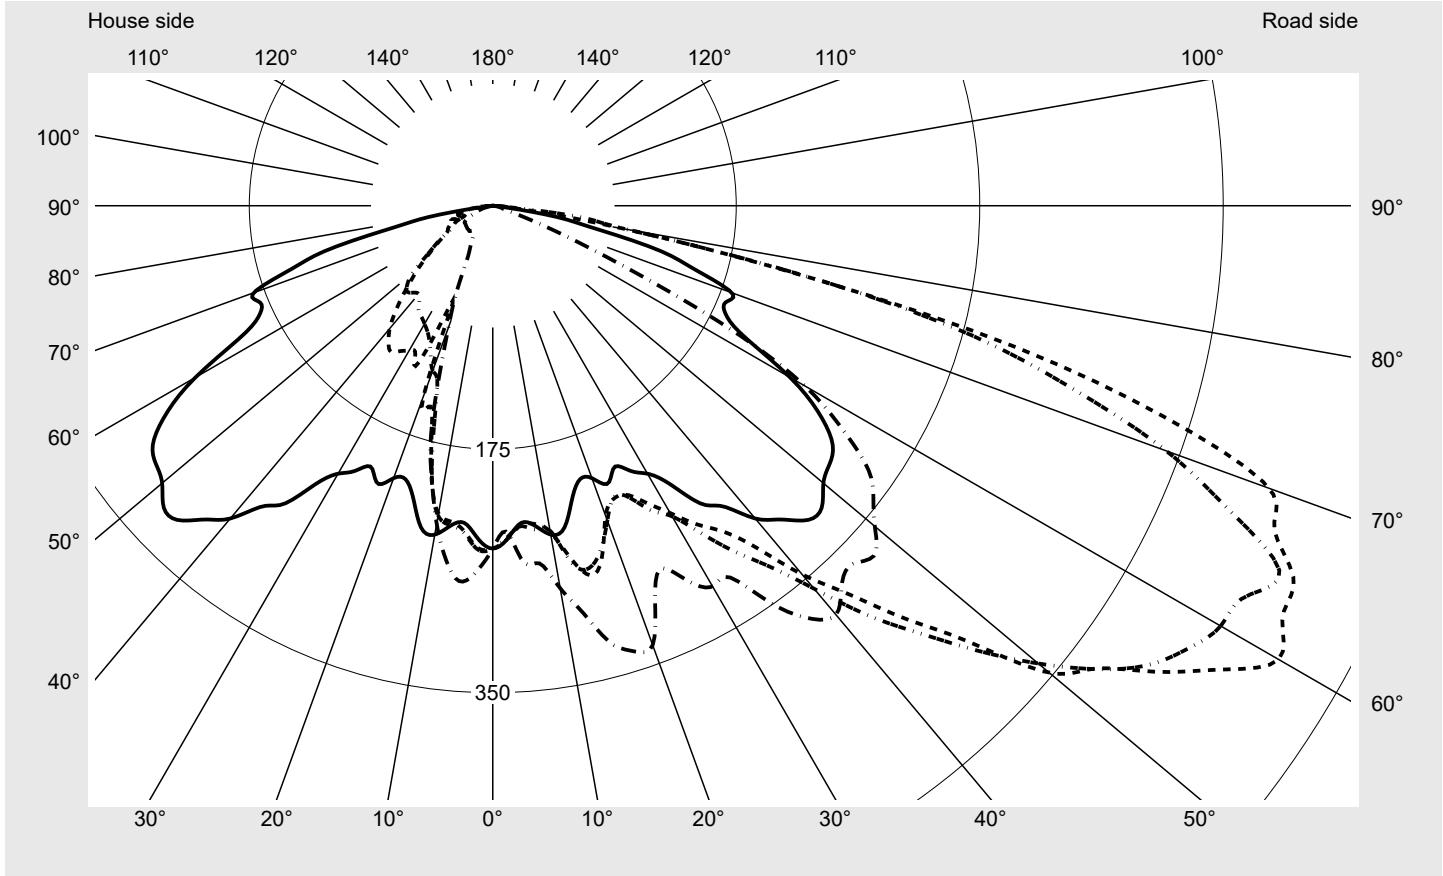

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	593.9
Imax 80°	98.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> 58293_310
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**



## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> <b>58293_310</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	239.8	240.0	240.1	239.7	240.0	239.8	238.6	237.2	236.7	236.5	235.6	235.3	234.4
5,0°	229.1	228.4	228.7	229.6	230.3	230.5	231.2	232.4	235.4	238.5	239.7	241.9	242.5
7,5°	231.9	232.6	231.2	229.7	229.3	230.7	234.7	239.7	244.4	248.4	250.9	254.0	255.3
10,0°	240.0	245.5	244.0	240.9	238.8	237.8	236.9	240.2	245.1	251.2	258.7	264.9	272.0
12,5°	237.3	248.6	259.0	262.1	260.8	259.9	262.9	262.2	260.3	267.2	276.2	282.6	282.7
15,0°	219.3	225.4	240.1	256.9	269.9	275.0	269.3	265.6	263.3	261.3	264.6	271.9	281.1
17,5°	206.8	214.9	231.6	247.1	254.2	262.3	258.8	252.0	246.2	242.9	244.5	247.3	257.3
20,0°	208.4	221.3	226.4	230.6	233.9	237.1	240.8	248.5	251.5	245.3	240.1	242.0	254.3
22,5°	216.1	219.3	220.3	223.1	226.9	227.7	227.1	227.7	235.4	240.6	242.8	248.2	253.0
25,0°	207.1	214.4	224.2	232.5	232.6	229.4	231.1	234.6	239.8	243.8	257.3	260.7	268.7
27,5°	215.0	225.1	225.5	231.9	237.3	241.3	246.8	251.6	257.6	266.8	281.0	288.8	303.3
30,0°	222.4	233.4	237.1	242.8	250.8	255.0	257.8	266.5	281.3	295.2	308.3	320.8	334.8
32,5°	237.4	244.8	245.8	249.4	262.0	271.1	279.1	290.5	312.4	328.5	340.2	345.4	356.7
35,0°	261.6	267.3	267.7	267.3	274.5	285.1	303.6	321.6	334.8	353.0	362.6	378.3	388.1
37,5°	272.5	277.6	279.9	285.7	293.6	308.5	326.9	345.0	359.7	372.7	387.7	420.5	413.3
40,0°	293.4	297.1	299.4	309.9	319.5	345.9	359.3	367.5	382.1	408.4	414.9	433.9	441.4
42,5°	305.8	310.7	318.2	336.2	353.8	378.6	399.4	400.4	400.5	427.8	436.5	449.4	450.6
45,0°	319.6	313.1	321.5	373.8	392.3	420.0	434.8	431.2	434.8	457.0	452.4	447.1	446.6
47,5°	320.8	309.8	325.1	385.4	419.7	463.8	473.6	464.3	469.8	469.4	456.5	443.9	445.2
50,0°	310.2	307.2	315.4	392.2	452.4	522.3	511.8	491.4	505.3	487.1	454.1	435.2	423.2
52,5°	305.1	301.6	326.9	413.0	512.4	546.3	547.1	524.7	530.1	506.6	457.9	420.1	397.8
55,0°	298.1	302.5	388.7	489.5	551.8	584.1	575.4	542.9	548.3	513.5	458.7	395.3	375.4
57,5°	278.3	306.9	409.1	507.8	582.3	620.5	592.4	554.8	536.8	492.4	436.5	370.2	343.0
60,0°	246.7	308.6	403.8	518.1	614.4	652.2	604.1	547.4	520.4	465.8	400.3	336.1	293.3
62,5°	203.8	309.3	401.4	514.5	592.8	640.0	609.1	568.3	505.6	448.4	370.3	308.4	244.7
65,0°	184.8	305.8	399.8	491.5	545.4	635.2	624.2	536.2	477.4	421.4	336.1	290.3	208.4
67,5°	181.2	300.3	385.2	455.9	537.1	608.0	573.8	499.7	429.1	379.6	303.5	252.0	174.7
70,0°	182.8	298.3	348.6	421.3	536.1	593.9	515.4	439.2	393.7	335.0	261.7	204.6	153.3
72,5°	152.3	295.2	340.0	415.6	464.5	507.8	436.8	365.4	336.0	281.8	215.0	165.1	137.1
75,0°	123.4	244.9	296.2	319.8	343.4	381.6	351.0	272.8	224.7	206.6	172.7	145.5	127.0
77,5°	74.5	181.8	192.1	227.4	191.9	217.5	221.5	172.7	139.2	141.8	115.3	105.6	88.0
80,0°	47.1	60.2	72.3	86.8	96.2	97.8	98.2	98.9	96.2	95.3	52.2	40.0	30.9
82,5°	9.3	12.5	13.4	18.9	18.9	29.8	65.1	93.0	67.0	41.5	23.5	16.6	10.9
85,0°	3.5	3.3	3.7	4.4	5.5	7.4	9.6	16.6	11.6	10.1	9.4	7.2	6.3
87,5°	2.3	2.4	2.6	2.9	3.1	3.3	3.6	4.1	4.4	4.0	3.8	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> 58293_310
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4
2,5°	234.1	233.5	232.9	233.4	234.2	235.0	241.0	242.5	243.2	244.5	246.1	247.4	248.1
5,0°	244.3	246.1	247.2	250.8	255.4	257.5	231.6	232.2	232.8	232.6	234.9	236.2	234.4
7,5°	259.1	260.3	263.4	262.6	260.8	259.4	230.1	229.9	228.3	227.7	229.0	231.6	231.0
10,0°	272.7	271.8	271.6	272.6	275.4	279.2	233.5	228.8	225.7	223.4	224.7	226.2	223.3
12,5°	285.6	286.2	290.0	295.9	298.0	299.6	227.2	221.3	214.0	207.4	202.7	202.1	203.7
15,0°	282.9	288.2	301.7	314.1	320.8	324.6	210.7	201.6	193.5	182.8	169.7	162.8	156.0
17,5°	275.5	290.1	300.8	317.3	329.9	335.7	199.0	192.5	185.9	171.1	151.0	132.5	124.4
20,0°	266.9	281.0	296.7	311.8	330.4	336.1	198.2	187.6	172.6	163.2	145.4	126.2	113.8
22,5°	264.4	276.4	296.7	308.8	307.9	304.8	194.5	174.3	162.8	143.5	74.0	116.6	98.7
25,0°	273.7	286.6	295.4	294.2	295.9	287.6	195.6	169.8	156.1	135.8	121.1	107.6	89.5
27,5°	302.2	308.3	307.5	302.6	297.9	304.0	195.8	178.3	162.7	136.6	120.6	101.8	83.5
30,0°	338.0	331.1	312.4	313.6	311.7	315.9	207.9	188.4	165.9	142.2	120.1	98.1	77.8
32,5°	351.6	334.4	325.1	337.0	328.7	316.6	224.1	203.2	170.7	147.0	123.9	95.1	73.8
35,0°	381.8	364.5	359.3	364.4	357.6	348.7	254.1	231.6	188.3	154.7	127.9	92.7	72.5
37,5°	400.8	388.8	368.5	359.8	364.8	373.8	263.8	240.0	192.1	161.1	123.0	86.7	73.2
40,0°	426.7	407.3	369.0	349.1	366.6	383.8	284.2	250.4	192.1	160.5	115.3	82.8	76.0
42,5°	445.4	405.8	374.1	350.6	367.9	371.2	294.9	249.1	189.9	153.0	103.8	84.7	76.8
45,0°	454.6	404.8	367.5	355.3	367.9	364.9	304.7	253.4	189.5	145.6	91.7	87.2	83.4
47,5°	444.2	397.0	350.0	356.6	373.5	371.9	285.3	245.8	183.2	123.3	79.8	83.2	80.6
50,0°	415.6	363.0	328.5	334.1	367.2	358.4	246.0	208.6	170.2	99.8	69.6	75.4	71.6
52,5°	377.0	341.7	305.5	319.2	337.4	344.8	245.2	210.0	153.6	79.9	59.0	62.0	59.4
55,0°	340.5	305.9	280.1	284.6	312.2	329.0	268.2	186.1	136.3	60.7	50.5	52.1	51.7
57,5°	304.7	261.3	234.1	233.3	280.3	297.2	220.2	138.9	101.2	52.2	43.1	44.3	44.4
60,0°	272.4	224.3	180.1	188.5	239.8	259.0	182.4	107.2	73.6	47.7	37.8	36.3	38.0
62,5°	220.8	167.7	135.7	140.5	177.7	194.5	144.0	86.7	60.7	46.5	36.4	32.0	31.7
65,0°	173.8	118.9	93.3	100.8	117.9	110.3	115.5	69.8	50.4	41.5	34.4	30.3	28.6
67,5°	127.0	81.4	58.3	50.3	53.2	55.8	112.4	66.9	43.1	33.6	31.4	26.8	22.4
70,0°	110.0	67.0	36.1	23.4	24.0	23.7	111.5	64.4	43.1	30.9	28.2	21.7	19.7
72,5°	95.0	38.0	20.3	11.1	10.3	9.3	90.0	56.0	44.0	38.4	31.8	23.7	19.8
75,0°	83.9	21.9	12.7	8.3	7.2	7.1	63.0	53.1	47.7	34.4	29.9	25.7	18.1
77,5°	31.9	15.2	9.0	6.5	5.7	5.5	54.2	48.4	47.2	30.9	25.1	22.1	16.2
80,0°	14.1	9.7	6.4	5.0	4.4	4.2	36.4	35.4	29.8	22.2	19.6	18.2	16.2
82,5°	9.0	6.6	4.7	3.7	3.2	3.1	9.7	11.3	14.2	14.6	15.4	11.1	10.4
85,0°	5.2	3.9	2.9	2.3	1.9	1.7	3.1	3.1	3.2	3.3	3.4	3.5	3.5
87,5°	3.0	2.2	1.5	1.2	1.0	1.0	2.2	2.0	2.0	2.0	1.9	1.9	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> 58293_310
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	246.4	0.4	0.4
2,5°	249.5	252.2	254.7	257.5	259.7	261.3	261.3	261.3	262.1	262.4	262.8	2.9	3.3
5,0°	231.6	233.6	237.0	241.2	245.2	249.9	256.6	263.5	269.0	271.4	271.0	5.8	9.1
7,5°	225.8	225.3	227.9	229.8	234.2	239.7	243.5	246.5	250.9	255.1	256.9	8.6	17.7
10,0°	214.9	206.6	211.0	211.6	215.6	218.1	225.4	229.7	234.1	233.6	232.1	11.4	29.1
12,5°	205.5	194.6	195.1	193.5	195.4	200.0	205.8	215.1	216.6	206.7	202.2	14.2	43.3
15,0°	155.4	160.1	160.7	158.6	157.5	160.9	168.0	169.1	179.2	173.9	171.9	15.8	59.1
17,5°	121.8	123.5	125.8	124.8	119.6	125.9	127.1	123.3	124.5	126.5	127.6	16.7	75.9
20,0°	106.9	108.0	108.3	102.2	91.8	85.2	85.0	83.3	89.9	94.2	93.3	17.8	93.7
22,5°	90.5	90.6	95.5	88.8	77.0	70.1	67.6	63.8	62.9	62.6	70.1	18.6	112.3
25,0°	76.4	77.8	84.5	74.0	71.7	64.2	62.0	54.8	48.0	44.9	46.3	20.3	132.7
27,5°	68.7	60.3	56.3	57.6	57.9	53.0	52.5	44.8	39.0	37.0	36.1	22.7	155.4
30,0°	65.1	58.5	54.4	51.3	46.7	43.1	39.1	38.0	34.6	31.9	30.8	25.7	181.1
32,5°	63.3	57.4	53.7	46.9	39.3	34.9	32.3	30.9	29.7	28.1	26.3	28.9	210.0
35,0°	65.2	58.8	52.1	43.5	36.9	31.4	28.3	26.5	25.1	24.5	24.1	33.2	243.2
37,5°	66.6	58.3	50.3	42.4	36.2	31.2	26.4	24.9	23.6	24.2	23.4	36.8	280.0
40,0°	70.0	59.1	50.2	41.5	33.5	27.6	25.6	24.3	24.1	24.1	23.4	40.8	320.8
42,5°	71.2	59.5	50.3	40.5	32.6	27.3	24.6	24.4	24.3	23.8	24.8	44.5	365.3
45,0°	74.6	61.9	46.1	36.6	31.9	28.1	24.6	24.3	24.1	24.3	24.5	48.0	413.3
47,5°	70.1	55.1	41.9	34.0	30.1	27.6	24.8	24.2	24.2	24.2	24.6	50.6	463.9
50,0°	58.1	48.8	38.8	31.0	29.0	26.4	25.4	24.3	24.2	24.2	24.2	51.8	515.7
52,5°	49.6	43.2	33.6	28.2	25.7	25.8	25.3	24.1	24.3	24.7	24.1	53.3	569.0
55,0°	43.5	36.5	28.4	24.7	23.3	23.8	24.6	23.5	24.2	23.6	23.7	54.9	623.9
57,5°	36.2	29.1	22.9	20.4	21.4	22.1	23.1	22.7	22.9	23.1	23.6	53.9	677.8
60,0°	31.5	22.4	17.1	16.3	17.5	19.6	21.7	21.9	21.8	22.3	23.3	52.0	729.9
62,5°	25.2	17.7	13.2	12.8	14.7	17.2	19.3	19.4	19.7	20.4	20.9	49.2	779.1
65,0°	20.3	14.6	11.5	10.5	12.0	14.7	17.0	16.9	17.5	17.0	17.7	45.9	824.9
67,5°	18.1	13.7	10.7	9.4	10.0	11.5	13.5	14.1	14.8	13.6	14.4	41.9	866.8
70,0°	16.3	12.0	9.9	8.5	8.3	9.3	10.5	11.2	11.9	11.7	11.8	38.6	905.4
72,5°	14.7	10.9	8.3	7.1	6.8	7.7	8.1	8.4	9.0	9.3	9.3	34.1	939.5
75,0°	12.7	10.3	7.2	6.0	5.6	5.9	6.2	6.5	6.5	6.5	6.7	27.2	966.6
77,5°	10.4	7.6	5.8	5.1	4.5	4.1	4.4	4.6	3.7	3.2	3.1	18.1	984.8
80,0°	10.8	6.1	4.2	3.9	3.3	3.0	2.8	2.9	2.0	1.0	0.6	9.2	994.0
82,5°	7.4	4.7	3.4	2.9	2.5	2.2	1.9	1.9	1.1	0.6	0.4	4.3	998.3
85,0°	3.4	2.6	2.3	1.9	1.8	1.4	1.0	0.9	0.7	0.4	0.4	1.2	999.4
87,5°	1.6	1.5	1.2	1.2	1.0	0.9	0.7	0.6	0.5	0.4	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2A51Y08HE</b> <b>EAN: 4058352896419</b>	<b>LP number</b> 58293_310
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	8450	58.1	60.6	59.4
95	241	252	8018	54.7	56.9	55.8
90	229	250	7618	51.5	53.6	52.6
85	216	248	7186	48.1	50.1	49.1
80	203	246	6753	44.9	46.7	45.8
75	190	243	6321	41.7	43.4	42.6
70	178	241	5922	38.8	40.3	39.6
65	165	238	5489	35.7	37.2	36.4
60	152	235	5057	32.7	34.0	33.4
55	140	232	4657	30.0	31.2	30.6
50	127	229	4225	27.1	28.1	27.6
45	114	225	3793	24.3	25.2	24.8
40	102	221	3393	21.7	22.5	22.1
35	89	216	2961	19.0	19.7	19.4
30	76	210	2528	16.4	17.0	16.7
25	63	203	2096	13.8	14.3	14.0
20	51	195	1697	11.4	11.8	11.6
15	38	184	1264	8.8	9.0	8.9
14	35	181	1164	8.2	8.4	8.3