

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2C51Y08FE
EAN: 4058352918913

LP number
58290_166



Version post-top or side-entry mounting, Smart Interface up/down
Optic asymmetric, extremely wide distribution (P1.0a)
Cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ - DALI2
Rated values Net luminous flux = 5570 lm
 Power consumption = 46.4 W
 Luminous efficacy = 120 lm/W

serial
documentation
27.07.2023

siteco


Luminous intensity in cd/klm

C180-0

C185-5

C270-90

Imax: 975 cd/klm

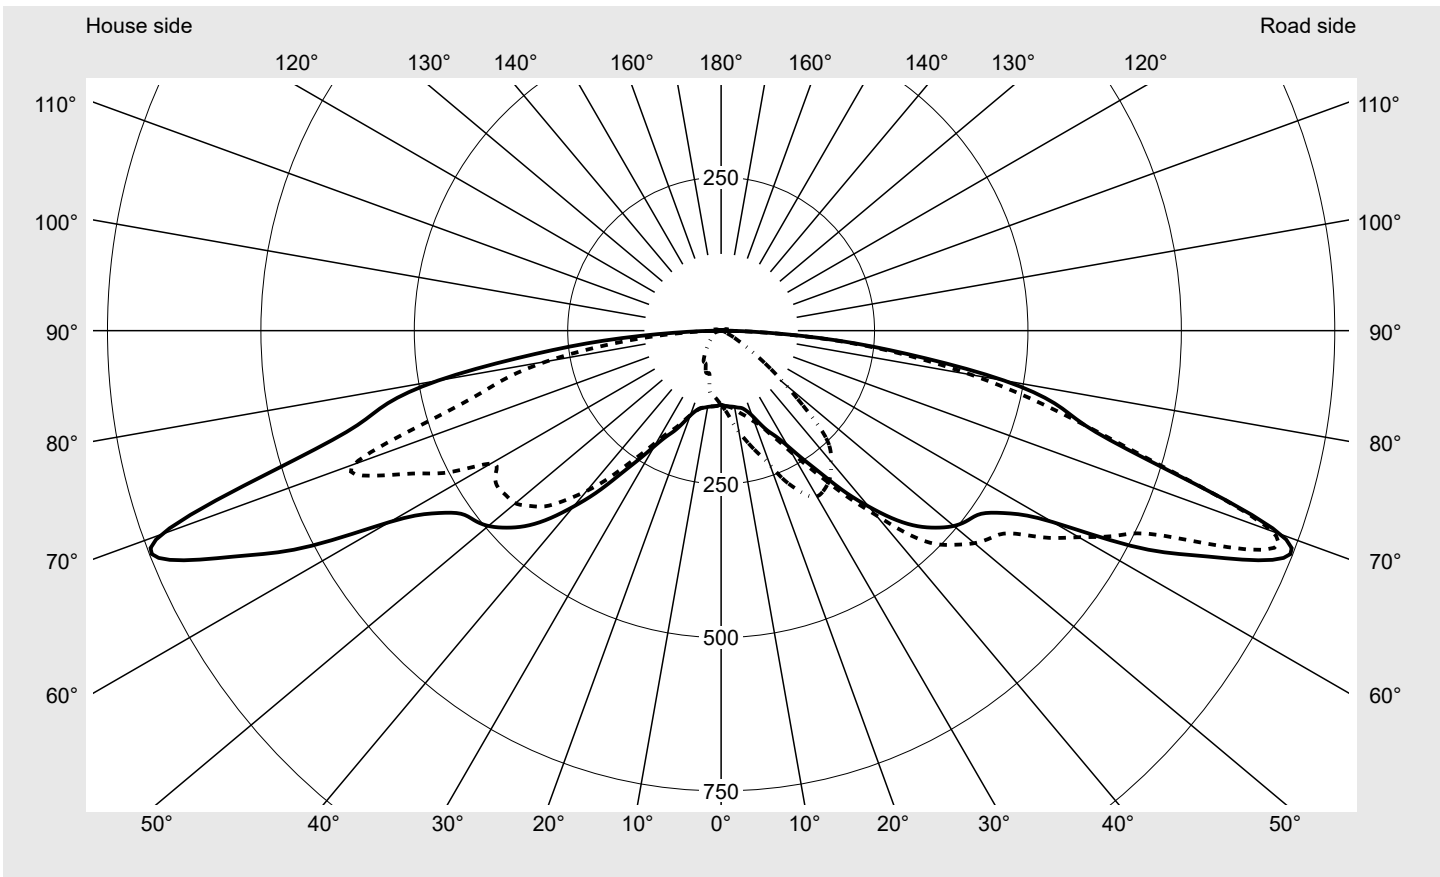

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	970.0
Imax 80°	468.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51Y08FE EAN: 4058352918913	LP number 58290_166
--	--	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

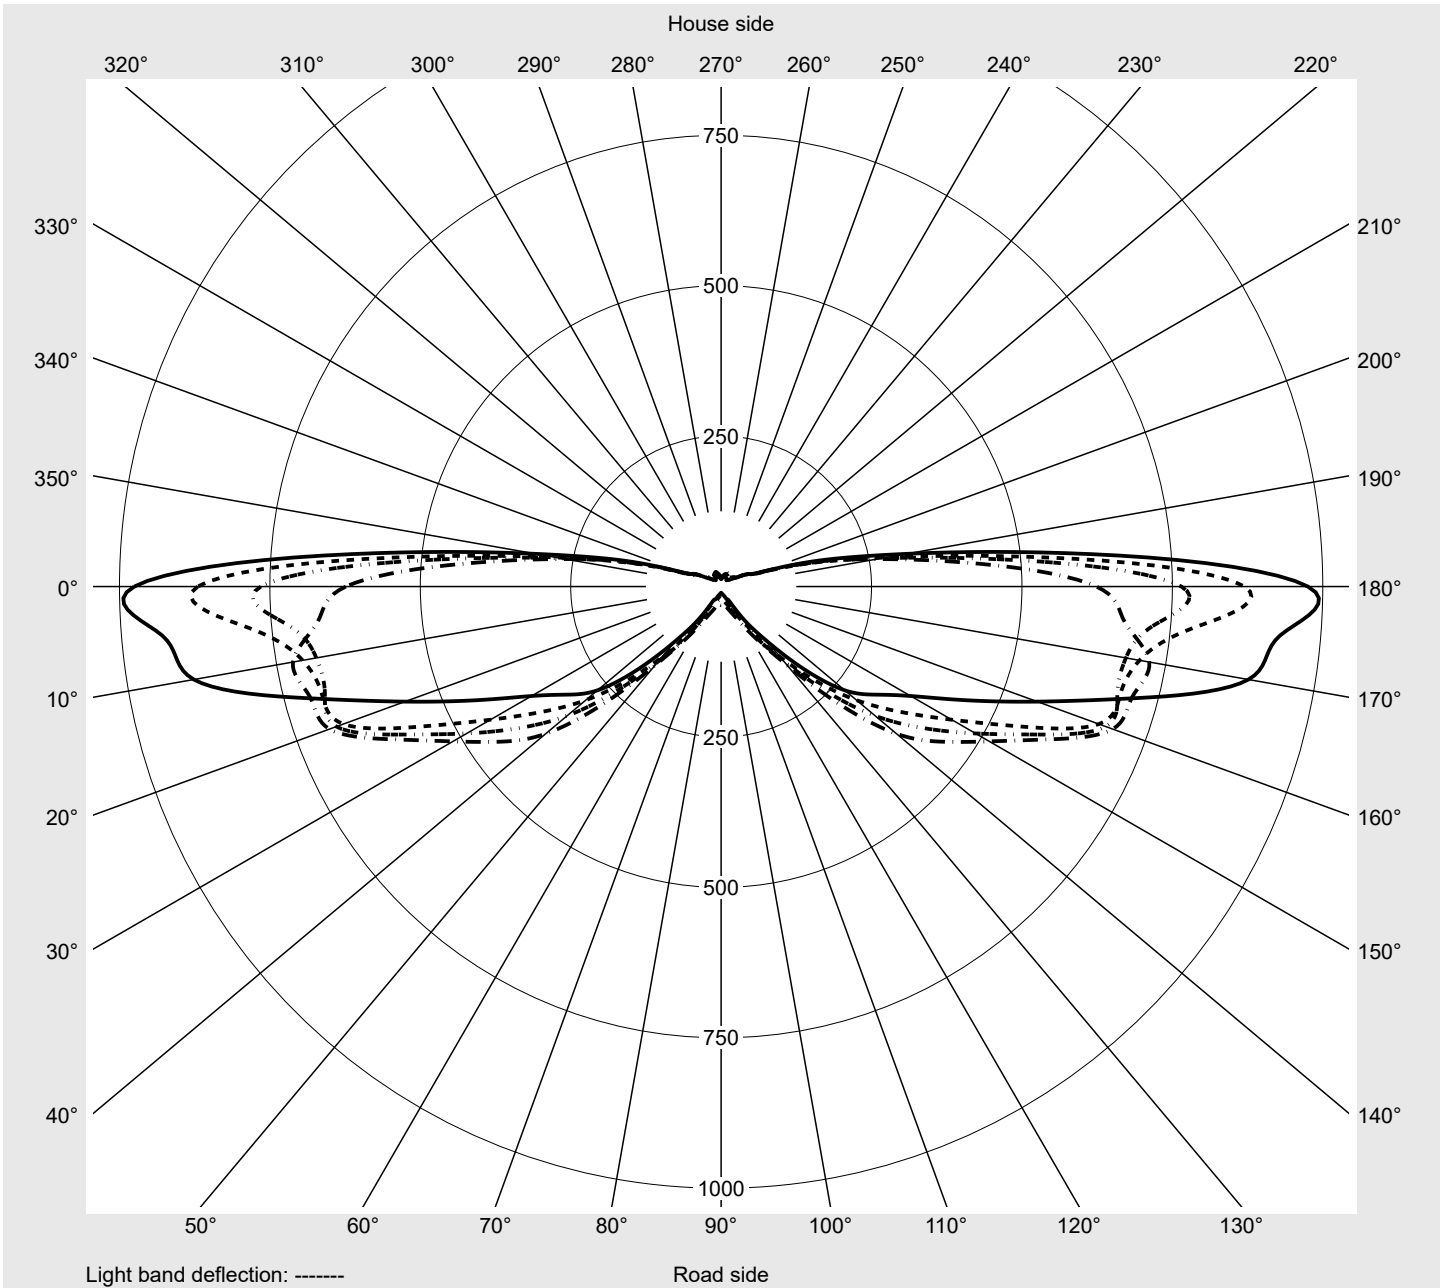

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51Y08FE EAN: 4058352918913	LP number 58290_166
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	122.3	122.5	122.6	123.2	123.7	123.4	123.1	123.4	123.7	124.7	125.7	126.5	127.1
5,0°	123.7	124.0	124.3	125.4	126.6	128.2	129.7	130.6	131.5	133.0	134.7	136.1	137.1
7,5°	124.7	126.5	128.8	133.3	138.0	141.2	143.7	145.6	147.0	148.2	149.3	150.9	152.7
10,0°	126.2	130.4	135.0	141.5	147.9	152.4	156.1	159.3	161.9	163.8	165.3	167.1	168.6
12,5°	128.5	136.5	143.9	149.9	155.1	160.1	165.1	170.7	176.1	180.5	184.4	184.5	184.6
15,0°	130.7	142.2	152.4	158.4	163.4	169.3	175.7	182.8	189.8	195.8	201.5	201.5	201.6
17,5°	136.9	149.0	159.7	166.0	171.2	178.3	185.9	193.8	201.6	209.1	215.4	218.9	221.5
20,0°	147.2	157.9	167.8	175.4	182.7	192.3	201.7	209.0	215.6	222.8	229.4	234.3	238.7
22,5°	163.1	166.7	172.6	184.8	199.0	212.3	225.7	228.8	232.4	237.4	242.9	248.6	254.3
25,0°	180.1	183.6	186.3	201.4	216.7	233.0	249.6	250.1	250.6	254.1	257.7	261.5	265.5
27,5°	195.0	202.5	211.1	222.8	234.9	245.6	255.3	263.7	271.6	274.1	276.7	275.9	274.9
30,0°	217.4	229.1	240.4	248.8	256.5	258.7	260.9	276.1	291.2	290.9	290.7	282.9	275.1
32,5°	248.0	261.1	273.7	276.3	278.7	281.0	283.2	296.0	308.8	305.0	301.1	282.5	263.9
35,0°	284.4	299.2	312.1	310.8	309.6	308.8	308.1	317.2	326.4	317.0	303.5	277.7	247.7
37,5°	331.0	344.9	353.9	352.0	350.1	342.1	334.1	331.6	329.1	314.6	295.3	262.0	223.9
40,0°	374.2	392.1	403.9	400.7	397.5	381.6	365.7	351.4	334.7	312.8	284.2	244.3	200.1
42,5°	416.0	448.2	476.1	469.0	461.9	436.1	408.8	377.9	344.2	306.8	268.7	233.2	198.3
45,0°	450.1	491.0	528.9	521.1	513.4	481.0	445.7	402.1	354.4	301.8	253.4	220.1	196.6
47,5°	475.2	516.4	552.2	548.7	545.2	514.2	477.5	425.1	365.1	297.4	237.2	204.4	183.7
50,0°	495.1	538.7	575.9	576.8	577.8	542.1	500.6	443.3	376.5	295.9	223.5	186.9	164.8
52,5°	507.3	554.5	593.7	603.7	613.8	565.0	513.8	459.3	394.8	302.7	215.3	165.9	133.8
55,0°	519.6	575.8	624.0	634.5	645.0	582.4	520.6	465.7	401.7	301.3	203.9	146.6	109.0
57,5°	553.9	627.9	687.7	682.8	677.8	595.6	517.6	457.2	391.1	286.3	185.8	129.4	93.7
60,0°	623.7	673.2	722.6	707.6	692.7	600.9	514.7	449.6	380.6	273.4	171.3	113.5	77.7
62,5°	765.0	724.1	683.2	681.8	680.4	582.0	488.3	410.0	334.1	244.9	162.1	106.3	59.2
65,0°	869.8	788.1	706.3	687.2	668.1	550.6	442.6	362.9	293.8	220.9	152.9	96.0	43.0
67,5°	975.3	932.6	889.9	716.1	559.2	446.8	363.8	313.2	268.3	192.9	118.3	70.4	30.3
70,0°	970.0	955.0	939.9	679.3	458.3	349.5	293.2	261.4	232.0	159.5	86.0	46.9	17.5
72,5°	775.6	781.4	787.2	572.6	358.0	286.7	225.8	200.4	176.6	116.6	57.2	30.5	13.2
75,0°	627.2	632.9	638.6	459.6	280.7	225.1	176.3	151.1	126.7	80.5	28.3	19.1	9.8
77,5°	561.6	521.6	481.7	351.7	241.3	188.8	157.4	120.1	84.9	51.4	18.6	13.2	7.8
80,0°	468.3	413.9	354.0	271.0	194.5	158.4	131.2	85.3	43.2	23.9	11.7	8.7	6.1
82,5°	324.8	303.9	272.2	207.6	132.0	113.5	92.3	60.4	30.7	17.2	8.7	6.6	4.8
85,0°	198.9	192.4	185.9	132.3	78.7	69.1	57.4	37.8	19.3	11.0	5.8	4.5	3.4
87,5°	74.6	72.1	69.7	49.6	29.5	25.9	21.5	14.2	7.2	4.1	2.2	1.7	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51Y08FE EAN: 4058352918913	LP number 58290_166
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	127.4	127.7	127.7	127.7	128.0	128.2	122.3	122.3	122.1	121.9	121.9	121.9	121.9
5,0°	137.7	138.1	138.1	138.1	138.3	138.5	123.5	123.4	123.4	123.5	123.6	123.7	123.0
7,5°	153.2	153.7	154.1	154.4	153.8	153.2	124.4	124.2	124.7	125.1	126.8	128.5	125.0
10,0°	169.4	170.0	169.9	169.8	168.9	167.9	125.6	124.9	126.7	128.2	129.0	129.5	125.4
12,5°	186.2	187.7	185.4	183.4	182.4	181.9	128.2	128.0	130.8	133.6	127.8	122.8	120.2
15,0°	203.1	204.5	201.3	198.0	197.7	197.3	131.6	132.5	135.5	138.4	129.3	120.2	118.1
17,5°	221.1	220.7	216.8	212.9	213.1	213.3	137.5	138.1	140.1	142.1	132.7	123.3	131.5
20,0°	237.1	235.3	232.9	230.3	231.6	232.8	146.5	145.8	146.1	146.4	137.0	127.5	145.4
22,5°	251.7	249.2	252.2	255.2	257.7	260.2	159.2	155.9	153.9	152.3	145.2	138.0	144.5
25,0°	262.6	259.7	266.6	272.9	277.9	282.5	174.3	167.8	162.7	156.9	148.6	139.5	137.4
27,5°	273.1	271.1	276.4	282.7	291.9	301.9	188.1	180.5	171.1	159.6	143.2	127.6	120.2
30,0°	273.0	270.9	278.6	287.3	299.1	311.9	208.0	197.1	181.3	162.2	137.9	115.4	103.4
32,5°	258.5	253.1	268.9	284.0	297.3	309.8	235.0	218.3	192.5	162.9	130.4	102.2	88.7
35,0°	241.8	235.9	259.7	280.8	293.6	303.6	266.3	241.9	204.7	163.6	126.6	90.2	79.4
37,5°	221.5	219.2	243.1	264.9	280.3	293.6	305.1	269.2	219.6	166.4	120.4	76.1	69.0
40,0°	201.6	203.2	224.2	244.3	262.0	278.8	341.2	295.9	233.5	168.6	117.3	69.5	62.5
42,5°	194.5	190.6	204.0	219.3	240.4	263.5	374.2	321.6	248.4	174.7	122.4	76.2	62.4
45,0°	183.0	173.7	181.1	188.4	211.6	234.8	404.7	347.2	258.7	171.4	116.1	78.6	58.3
47,5°	166.4	151.9	148.8	145.8	164.0	182.2	422.7	354.8	251.4	153.4	104.1	75.7	55.6
50,0°	143.4	127.0	116.6	108.7	123.0	137.2	437.8	362.3	255.4	136.9	101.6	70.4	51.2
52,5°	109.5	93.2	82.9	75.5	87.9	100.2	441.4	357.0	245.6	123.8	91.0	62.0	44.6
55,0°	83.7	68.1	58.1	51.2	60.7	70.1	444.3	351.7	234.7	108.3	78.5	52.6	38.0
57,5°	69.7	55.1	45.5	38.8	43.2	47.7	435.9	307.2	196.3	88.9	63.7	38.6	31.8
60,0°	55.7	43.7	35.1	29.0	29.8	30.7	432.8	262.8	155.7	69.5	50.0	30.6	27.2
62,5°	45.8	34.2	27.6	22.7	22.4	22.0	499.7	270.6	150.5	66.7	49.5	32.3	26.2
65,0°	33.9	25.8	20.7	17.3	15.0	13.3	550.6	278.5	147.6	63.8	47.3	32.8	24.3
67,5°	23.9	18.3	14.9	12.7	11.3	10.3	617.8	312.8	165.5	70.6	49.4	31.3	22.8
70,0°	15.0	12.6	10.7	9.1	8.4	7.8	636.6	347.2	190.2	77.4	53.8	30.2	23.7
72,5°	11.1	9.3	8.0	7.1	6.5	6.2	514.7	286.9	158.3	62.8	44.8	29.5	21.6
75,0°	8.2	6.8	5.9	5.3	5.0	4.8	416.2	231.8	127.1	49.1	38.4	28.8	22.2
77,5°	6.4	5.2	4.5	4.0	3.9	3.8	359.2	185.2	96.4	36.1	28.9	22.5	18.4
80,0°	4.7	3.9	3.4	2.9	2.9	2.8	288.8	136.8	67.1	24.9	20.6	16.9	14.8
82,5°	3.7	3.0	2.5	2.2	2.0	1.9	201.0	77.2	46.4	15.6	13.8	12.1	11.7
85,0°	2.6	2.1	1.7	1.4	1.2	1.1	116.7	34.5	21.4	8.3	8.0	7.7	8.1
87,5°	1.0	0.8	0.6	0.5	0.5	0.4	43.8	12.9	8.0	3.1	3.0	2.9	3.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51Y08FE EAN: 4058352918913	LP number 58290_166
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	0.2	0.2
2,5°	121.8	120.9	120.1	119.4	118.5	117.2	115.8	115.0	114.5	114.5	114.5	1.5	1.6
5,0°	122.2	120.9	119.3	117.4	115.4	113.4	111.6	110.5	109.6	109.5	109.3	3.0	4.6
7,5°	121.7	118.7	115.9	113.2	110.9	109.7	108.9	107.8	106.8	106.3	106.0	4.7	9.3
10,0°	121.2	116.7	112.6	109.6	106.9	106.6	106.2	105.2	104.1	103.3	102.6	6.5	15.9
12,5°	118.6	117.2	115.1	110.4	105.1	100.6	96.6	93.4	90.8	89.2	88.0	8.4	24.3
15,0°	116.0	116.8	117.6	109.1	101.2	94.7	88.9	82.7	77.5	75.0	73.4	10.4	34.7
17,5°	139.7	125.7	112.7	102.6	94.6	89.1	84.7	80.1	75.7	74.2	72.8	12.7	47.4
20,0°	163.4	133.0	107.2	94.3	87.5	82.1	78.6	75.8	73.8	72.8	72.1	15.3	62.7
22,5°	151.0	124.6	101.5	87.2	78.1	72.7	69.9	67.8	66.4	66.1	65.9	17.9	80.6
25,0°	135.4	113.5	93.9	80.5	71.1	65.3	61.1	60.0	58.9	59.3	59.7	20.6	101.1
27,5°	112.9	97.6	82.4	74.1	68.4	63.2	58.5	58.2	57.9	58.1	58.4	23.2	124.3
30,0°	94.4	82.6	72.4	67.5	64.3	60.1	56.0	56.4	56.9	57.0	57.1	25.8	150.2
32,5°	80.6	71.7	64.5	60.2	57.4	55.6	54.2	53.9	53.6	52.6	51.5	28.4	178.6
35,0°	69.6	62.4	57.1	54.0	51.8	51.5	51.1	50.6	49.8	48.1	46.2	31.1	209.7
37,5°	62.1	55.8	49.6	49.0	48.3	47.0	45.4	45.3	45.2	43.0	40.7	33.7	243.4
40,0°	55.7	49.5	43.7	44.0	44.3	42.4	40.5	40.3	40.1	38.0	35.9	36.5	279.9
42,5°	50.5	44.3	40.1	39.7	39.3	37.9	36.4	34.7	33.2	32.4	31.9	40.2	320.1
45,0°	45.5	41.1	36.7	35.9	35.1	34.3	33.1	30.8	28.1	28.2	28.3	43.1	363.3
47,5°	40.8	37.2	33.6	32.5	31.4	31.1	30.9	28.2	25.4	25.3	25.1	44.7	407.9
50,0°	36.2	33.3	30.4	29.6	28.8	29.0	29.2	26.3	23.4	22.8	22.2	46.1	454.0
52,5°	31.0	28.9	26.9	27.4	27.8	28.0	28.1	25.0	22.2	20.7	19.7	46.9	500.9
55,0°	27.2	25.4	23.6	25.1	26.6	26.9	27.2	24.2	21.3	19.3	17.4	47.7	548.7
57,5°	26.0	22.8	20.6	23.0	25.1	26.0	26.6	23.8	21.0	18.3	15.6	48.6	597.2
60,0°	24.0	21.0	18.1	20.9	23.3	24.8	25.9	23.3	20.6	17.2	13.7	49.2	646.5
62,5°	20.9	18.1	16.2	18.7	21.2	21.9	22.5	20.6	18.5	16.0	13.4	49.9	696.3
65,0°	17.8	16.0	14.3	16.7	19.1	19.4	19.8	18.2	16.6	14.7	12.9	50.6	746.9
67,5°	17.5	15.6	13.7	15.6	17.2	18.1	18.7	16.9	15.1	13.7	12.4	52.1	799.0
70,0°	17.3	15.2	13.2	13.9	14.7	15.6	16.4	14.7	13.2	12.2	11.3	50.2	849.2
72,5°	17.4	14.6	13.1	11.9	10.9	11.5	12.1	11.3	10.6	10.1	9.8	41.2	890.4
75,0°	17.5	14.8	13.0	10.6	8.2	8.3	8.4	8.2	8.0	7.7	7.4	33.2	923.6
77,5°	15.5	13.1	11.1	9.0	6.9	6.2	5.6	5.2	5.0	3.9	2.9	27.2	950.8
80,0°	13.3	11.2	9.0	7.2	5.6	4.1	2.8	2.8	2.7	1.5	0.2	21.1	971.9
82,5°	11.3	8.7	6.5	5.1	4.0	2.9	1.9	1.7	1.6	0.9	0.2	15.2	987.1
85,0°	8.4	6.1	4.1	3.2	2.6	1.8	1.1	0.7	0.4	0.3	0.2	9.4	996.5
87,5°	3.1	2.3	1.6	1.2	1.0	0.7	0.4	0.3	0.2	0.2	0.1	3.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C51Y08FE EAN: 4058352918913	LP number 58290_166
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5570	46.4	48.5	47.4
95	241	252	5285	43.6	45.6	44.6
90	229	250	5022	41.1	42.9	42.0
85	216	248	4737	38.4	40.1	39.2
80	203	246	4452	35.8	37.3	36.6
75	190	243	4167	33.2	34.6	33.9
70	178	241	3903	30.9	32.2	31.6
65	165	238	3618	28.5	29.7	29.1
60	152	235	3333	26.1	27.2	26.6
55	140	232	3070	23.9	24.9	24.4
50	127	229	2785	21.7	22.5	22.1
45	114	225	2500	19.5	20.2	19.8
40	102	221	2237	17.5	18.2	17.8
35	89	216	1952	15.4	15.9	15.6
30	76	210	1667	13.4	13.9	13.6
25	63	203	1382	11.5	11.9	11.7
20	51	195	1118	9.7	10.0	9.8
15	38	184	833	7.8	8.0	7.9
10	25	169	548	5.1	5.3	5.2
9	24	168	526	4.9	5.1	5.0