

Photometric test report

Family
Silica® 21

Order number: 51MX34DB49SB
EAN: 4058352892893

LP number
59283_70




Version Suspended luminaire, reflector, black, direct-/indirect distribution, asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 9600 lm
 Power consumption = 62.4 W
 Luminous efficacy = 153.8 lm/W

serial documentation
02.08.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 461 cd/klm**

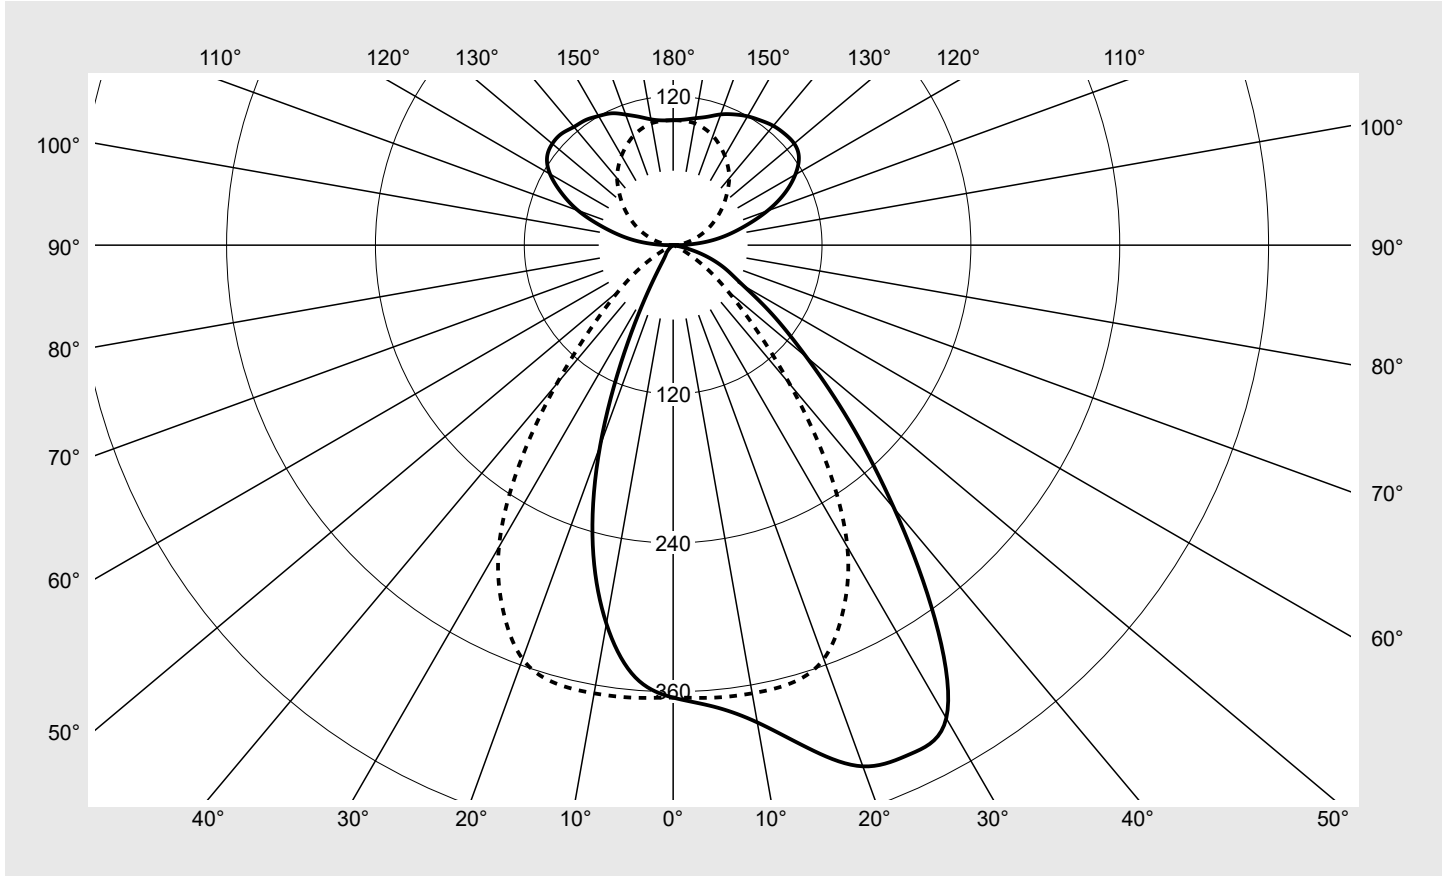

Classifications

DIN 5040	C 6 2
CIE	N1=74 N2=94 N3=99 N4=56 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	56.1%
ϕ_o	43.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX34DB49SB EAN: 4058352892893	LP number 59283_70
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	364.7	364.7	364.7	364.7	364.7	364.7	364.7
5°	373.4	374.2	373.9	372.4	372.0	370.0	366.2
10°	390.7	390.9	390.3	389.7	385.4	375.2	366.9
15°	419.6	426.1	426.0	420.4	403.3	382.3	365.7
20°	447.1	456.4	458.5	446.1	411.0	376.9	355.0
25°	452.6	460.6	453.6	431.0	395.6	351.4	324.5
30°	440.3	439.8	430.3	390.5	349.9	308.3	280.9
35°	367.9	364.8	361.9	334.1	285.8	241.7	216.7
40°	277.4	282.5	289.0	275.8	227.9	175.0	146.3
45°	200.8	207.3	222.4	214.2	174.3	117.9	91.5
50°	140.2	148.6	163.4	159.9	127.4	79.2	57.1
55°	98.0	104.1	120.3	117.5	94.9	52.4	33.6
60°	65.5	71.2	86.2	87.8	71.3	30.8	14.6
65°	48.2	50.7	59.5	65.1	47.4	16.3	4.7
70°	32.8	36.4	42.5	43.7	27.4	8.4	1.8
75°	16.4	20.5	29.1	21.1	13.2	4.7	0.6
80°	2.7	3.9	8.6	8.4	6.0	1.9	0.3
85°	1.0	1.1	1.6	1.5	0.7	0.5	0.5
90°	5.1	4.9	5.2	5.1	3.1	1.0	0.4
95°	23.6	24.1	25.8	24.5	15.6	8.0	4.1
100°	42.3	43.3	43.7	38.5	25.8	14.5	9.5
105°	60.4	61.7	60.5	51.6	35.4	21.8	16.0
110°	80.9	81.7	76.3	63.6	45.4	29.6	23.0
115°	99.3	98.4	90.6	74.6	54.9	37.4	30.6
120°	113.7	112.0	102.2	83.3	64.1	44.9	38.1
125°	123.7	120.5	109.6	92.0	71.5	52.1	46.1
130°	127.4	124.7	113.0	96.3	77.5	59.5	54.0
135°	127.0	124.4	114.1	99.9	82.2	66.6	62.0
140°	125.6	123.2	114.1	102.3	86.1	73.2	70.3
145°	122.8	121.6	114.6	103.4	89.6	79.2	77.1
150°	119.9	119.3	113.7	103.5	92.3	85.0	83.2
155°	116.3	116.3	110.3	102.8	94.6	90.3	88.8
160°	112.2	112.1	106.9	101.9	96.9	93.8	93.7
165°	107.2	106.8	103.8	100.5	98.5	97.0	97.3
170°	103.9	102.9	102.2	100.5	99.8	99.7	99.8
175°	101.6	101.2	100.4	100.2	100.5	100.4	100.5
180°	100.7	100.7	100.7	100.7	100.7	100.7	100.7

Photometric test report

Family Silica® 21	Order number: 51MX34DB49SB EAN: 4058352892893	LP number 59283_70
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	364.7	364.7	364.7	364.7	364.7	364.7	2.2	2.2
5°	362.9	358.9	355.8	351.9	350.5	349.8	17.4	19.6
10°	356.4	346.7	334.3	322.3	312.5	309.9	34.3	53.9
15°	351.5	329.8	301.2	272.8	255.4	250.3	50.5	104.3
20°	332.5	299.0	251.5	205.7	180.6	172.0	63.8	168.1
25°	300.5	247.9	184.7	134.5	99.3	86.1	70.5	238.6
30°	246.1	187.5	119.2	65.0	36.4	29.2	70.5	309.2
35°	174.7	119.3	62.2	24.9	14.0	12.2	62.6	371.8
40°	109.6	67.1	27.5	12.3	9.3	8.7	51.8	423.6
45°	65.7	34.8	12.8	8.3	6.4	5.9	40.7	464.3
50°	38.9	17.2	7.5	5.5	3.9	3.3	30.8	495.1
55°	21.5	8.7	4.7	3.3	2.1	1.8	22.9	518.0
60°	8.2	4.3	2.8	2.0	1.5	1.3	16.4	534.4
65°	2.7	2.1	1.7	1.4	1.0	0.7	11.5	545.9
70°	1.1	1.1	0.9	0.8	0.6	0.3	7.8	553.7
75°	0.4	0.5	0.5	0.4	0.4	0.3	4.4	558.1
80°	0.2	0.3	0.3	0.3	0.2	0.2	1.4	559.5
85°	0.5	0.5	0.6	0.6	0.6	0.6	0.4	559.9
90°	1.0	3.1	5.1	5.2	4.9	5.1	2.0	562.0
95°	8.1	15.6	24.4	25.8	24.1	23.5	10.2	572.1
100°	14.5	25.6	38.0	43.6	43.3	41.9	17.2	589.3
105°	21.9	35.3	51.6	60.4	61.7	60.5	23.8	613.1
110°	29.6	45.2	63.5	76.5	81.3	81.5	29.9	643.0
115°	37.4	55.0	74.7	90.7	98.3	99.2	34.9	677.9
120°	45.0	63.8	83.7	102.6	112.6	114.6	38.2	716.1
125°	52.1	71.5	91.4	109.3	120.5	124.0	39.7	755.8
130°	59.5	77.1	96.8	112.7	124.3	127.2	39.3	795.1
135°	66.2	81.6	99.7	114.1	124.5	127.1	37.5	832.6
140°	72.6	85.5	102.0	114.8	123.0	124.4	35.0	867.6
145°	78.7	89.2	103.4	114.2	121.7	123.1	31.9	899.4
150°	84.6	92.4	103.1	112.6	119.8	120.2	28.1	927.5
155°	89.7	94.6	103.0	110.2	116.6	117.3	23.8	951.3
160°	94.2	96.3	102.1	107.0	111.6	112.0	19.2	970.5
165°	97.4	98.7	101.2	104.4	106.4	107.2	14.4	985.0
170°	99.8	100.1	101.3	102.3	102.9	103.0	9.6	994.6
175°	100.7	100.4	100.7	100.9	101.1	101.0	4.8	999.4
180°	100.7	100.7	100.7	100.7	100.7	100.7	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX34DB49SB EAN: 4058352892893	LP number 59283_70
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------


Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.1	23.0	22.9	23.8	24.9	17.5	18.4	18.3	19.2	20.3
	3H	22.4	23.2	23.3	24.1	25.3	17.3	18.1	18.2	19.0	20.1
	4H	22.5	23.2	23.4	24.1	25.3	17.2	17.9	18.1	18.8	20.0
	6H	22.4	23.0	23.3	23.9	25.1	17.0	17.7	17.9	18.6	19.8
	8H	22.3	22.9	23.2	23.8	25.0	16.9	17.6	17.9	18.5	19.7
	12H	22.2	22.7	23.1	23.7	24.9	16.8	17.4	17.8	18.3	19.5
4H	2H	22.3	23.0	23.2	23.9	25.0	18.1	18.8	19.0	19.7	20.9
	3H	22.9	23.5	23.8	24.4	25.6	18.1	18.7	19.1	19.7	20.9
	4H	23.0	23.6	24.0	24.5	25.7	18.1	18.6	19.0	19.5	20.7
	6H	22.9	23.4	23.9	24.3	25.6	17.9	18.4	18.9	19.3	20.6
	8H	22.8	23.3	23.8	24.2	25.5	17.8	18.2	18.8	19.2	20.5
	12H	22.7	23.1	23.7	24.1	25.4	17.7	18.1	18.7	19.1	20.3
8H	4H	23.0	23.4	23.9	24.3	25.6	18.1	18.5	19.1	19.5	20.8
	6H	22.9	23.3	23.9	24.3	25.5	18.1	18.4	19.1	19.4	20.7
	8H	22.8	23.2	23.9	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	12H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	18.9	19.2	20.5
12H	4H	22.9	23.2	23.8	24.2	25.5	18.1	18.4	19.0	19.4	20.7
	6H	22.8	23.1	23.8	24.1	25.4	18.0	18.3	19.0	19.3	20.6
	8H	22.8	23.0	23.8	24.0	25.3	17.9	18.2	19.0	19.2	20.5

Luminance table	Max. for $\gamma \geq 65^\circ$												Photometric dimensions in mm:	L = 1470
													B = 49	
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	
γ	Luminance in cd/m²													
45°	37847.1	39066.6	41924.1	40365.0	32848.9	22219.0	17240.8	12382.6	6567.9	2406.2	1567.6	1215.3	1109.8	
50°	29067.9	30810.4	33888.8	33146.8	26408.9	16415.6	11845.9	8064.2	3571.3	1552.6	1140.8	806.4	677.6	
55°	22763.6	24190.8	27955.8	27307.0	22040.1	12165.8	7803.0	5001.4	2028.8	1096.5	776.1	479.4	412.9	
60°	17451.9	18977.7	22985.1	23414.0	18995.8	8209.6	3899.2	2185.5	1136.6	756.0	524.0	408.9	347.9	
65°	15195.7	15999.0	18754.9	20544.0	14954.8	5133.1	1478.7	858.1	677.7	537.7	435.2	322.6	214.1	
70°	12794.7	14194.0	16548.5	17025.4	10672.5	3279.9	694.4	413.8	416.2	369.4	305.5	220.6	135.2	
75°	8452.8	10540.4	14977.7	10871.5	6786.5	2443.9	319.3	210.1	256.4	244.6	225.5	182.3	147.3	
80°	2097.6	3013.3	6611.4	6464.8	4610.5	1421.4	202.6	191.1	225.6	231.8	220.3	191.1	174.2	
85°	1477.2	1640.8	2520.1	2347.3	1120.9	731.0	721.8	756.9	822.7	880.8	912.9	896.1	902.2	

Photometric test report

Family Silica® 21	Order number: 51MX34DB49SB EAN: 4058352892893	LP number 59283_70
------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

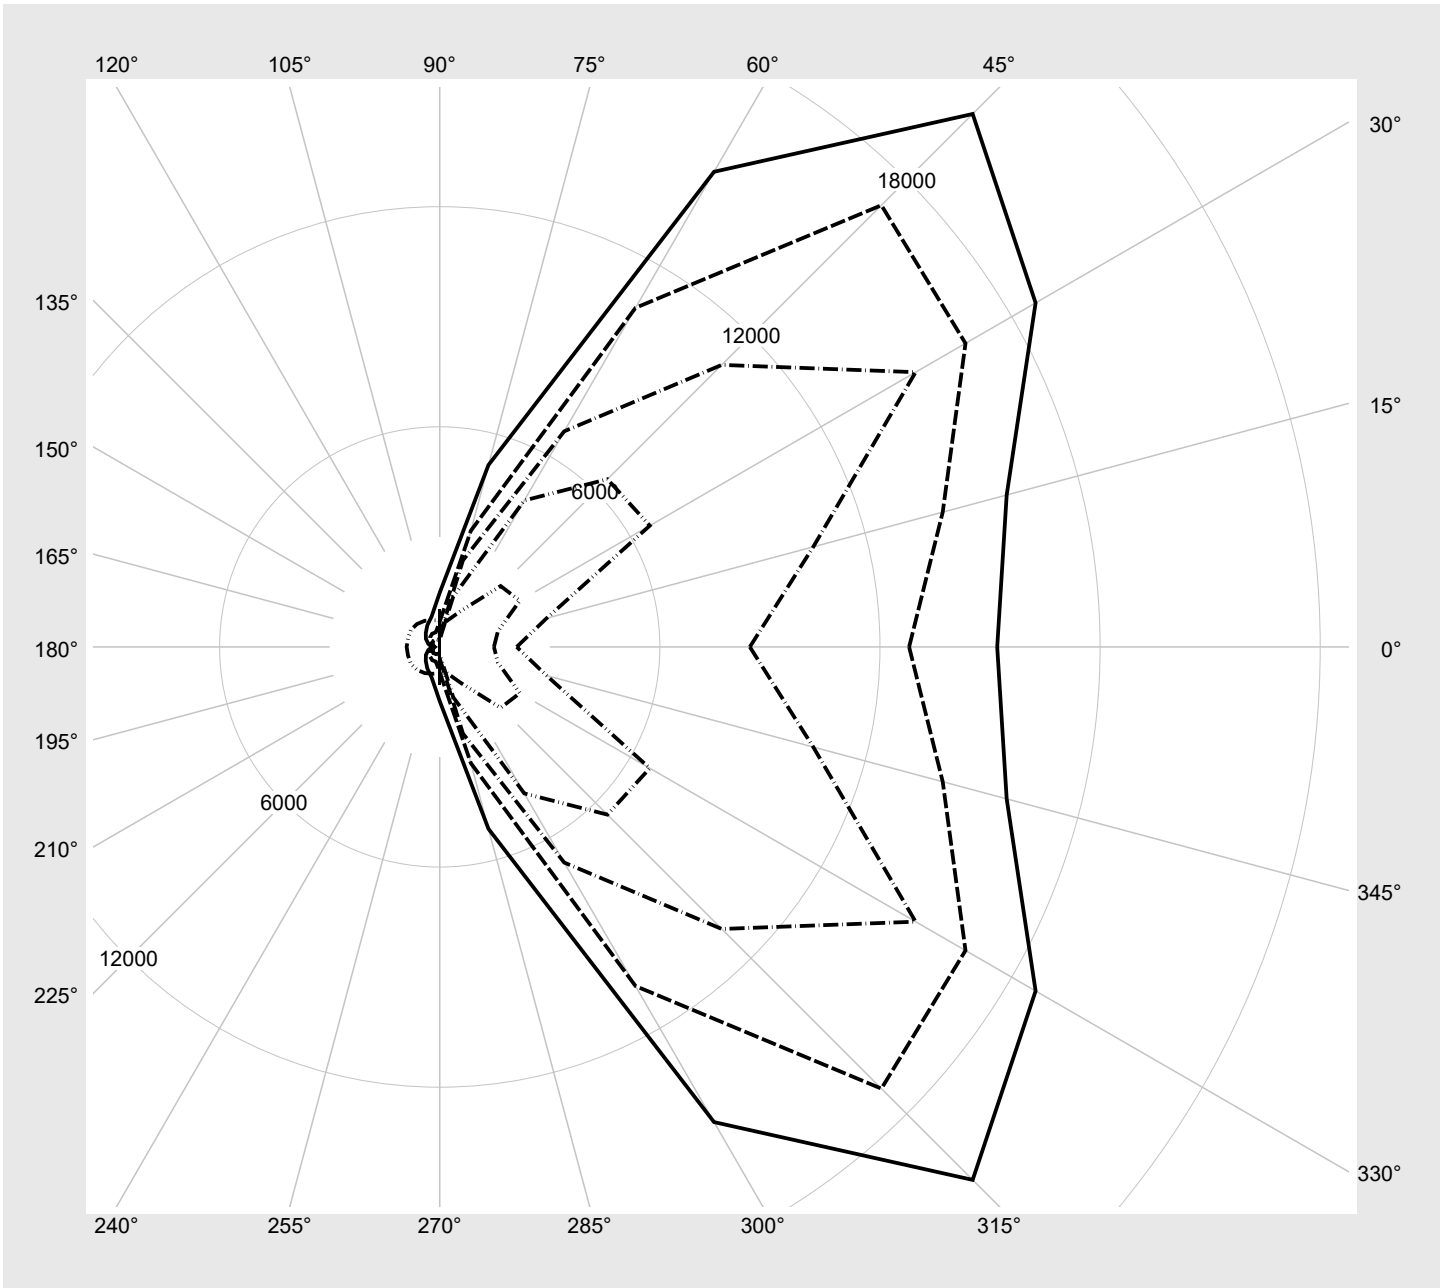

Photometric test report

Family Silica® 21	Order number: 51MX34DB49SB EAN: 4058352892893	LP number 59283_70
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	9565	62.2
95	240	252	9105	59.0
90	227	250	8640	55.8
85	214	248	8172	52.7
80	200	245	7664	49.3
75	187	243	7189	46.1
70	174	240	6708	43.1
65	161	237	6225	40.0
60	149	234	5778	37.1
55	136	231	5289	34.0
50	123	227	4797	31.0
45	111	224	4339	28.1
40	98	219	3840	25.1
35	86	214	3377	22.2
30	73	208	2872	19.2
25	61	202	2402	16.4
20	49	194	1930	13.5
15	37	183	1456	10.7
10	24	168	941	7.8
5	12	142	463	5.2
2	5	110	182	4.2