
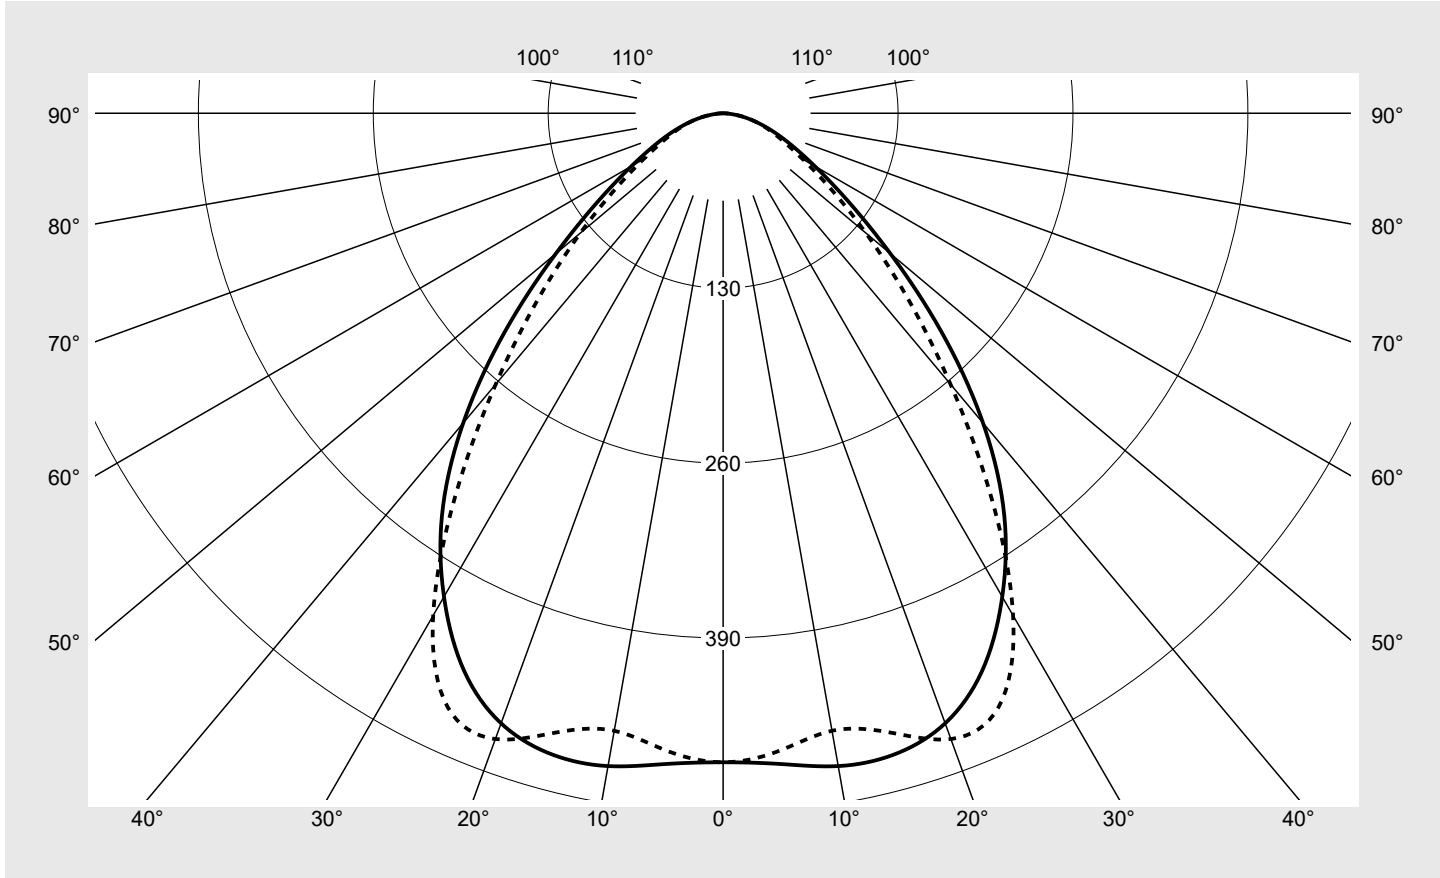


# Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL12DV4FXG</b> <b>EAN: 4058352922354</b>	<b>LP number</b> <b>58637_158</b>
	<b>Version</b> cover frosted, wide distribution, high visual comfort <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 15360 lm Power consumption = 84.1 W Luminous efficacy = 182.6 lm/W	<b>serial documentation</b> <b>19.09.2023</b>



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 498 cd/klm**




Classifications	
DIN 5040	A 5 0
CIE	N1=67 N2=92 N3=99 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 11 Recessed</b>	Order number: <b>51TL12DV4FXG</b> EAN: <b>4058352922354</b>	LP number <b>58637_158</b>
Table of values for luminous intensities		
Maximum luminous intensity		

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	482.3	482.3	482.3	482.3	482.3	482.3	482.3	2.9	2.9
5°	485.4	482.8	478.2	477.5	477.4	475.9	475.7	22.9	25.8
10°	492.7	488.2	477.9	471.3	467.6	465.9	466.0	45.2	71.0
15°	493.2	486.1	471.9	467.9	471.0	473.7	476.3	67.5	138.5
20°	482.5	473.5	462.5	471.9	487.1	492.8	494.9	89.9	228.4
25°	456.4	447.1	449.2	479.4	497.6	491.1	485.8	109.5	337.8
30°	414.9	406.8	427.0	475.1	479.0	447.1	431.1	121.4	459.2
35°	364.2	358.0	387.7	436.7	420.7	368.9	346.8	122.0	581.2
40°	300.5	296.3	322.5	357.9	336.0	284.8	262.9	110.4	691.6
45°	229.2	226.3	238.5	259.8	247.2	211.8	193.4	90.1	781.7
50°	162.3	159.3	161.6	173.6	174.5	155.2	138.5	68.2	849.9
55°	112.5	108.0	105.1	112.3	121.6	110.9	97.2	49.6	899.5
60°	78.7	73.1	68.3	73.1	83.7	77.4	68.5	35.5	935.0
65°	56.0	50.2	45.0	48.4	56.8	54.5	49.6	25.5	960.5
70°	39.5	34.5	29.5	32.1	37.8	38.5	36.6	18.1	978.6
75°	26.0	22.0	18.4	20.2	23.9	25.9	25.8	12.0	990.6
80°	14.9	12.2	9.9	10.8	13.0	14.8	15.3	6.8	997.4
85°	5.4	4.3	3.6	4.0	4.7	5.6	5.8	2.5	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Licross® 11 Recessed</b>	Order number: <b>51TL12DV4FXG</b> EAN: <b>4058352922354</b>	LP number <b>58637_158</b>
---------------------------------------	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>								
------------------	----------------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.7	24.2	23.1	24.5	24.8	22.8	24.3	23.2	24.6	24.9
	3H	23.2	24.6	23.6	24.9	25.2	23.4	24.7	23.7	25.0	25.4
	4H	23.5	24.7	23.8	25.0	25.4	23.6	24.8	24.0	25.2	25.5
	6H	23.6	24.7	24.0	25.1	25.5	23.8	24.9	24.2	25.3	25.7
	8H	23.7	24.7	24.1	25.1	25.5	23.9	24.9	24.3	25.3	25.7
	12H	23.7	24.7	24.2	25.1	25.5	23.9	24.9	24.4	25.3	25.7
4H	2H	22.9	24.2	23.3	24.5	24.9	23.0	24.3	23.4	24.6	25.0
	3H	23.5	24.6	24.0	25.0	25.4	23.7	24.8	24.2	25.1	25.6
	4H	23.8	24.7	24.3	25.1	25.6	24.1	25.0	24.5	25.4	25.8
	6H	24.0	24.8	24.5	25.3	25.7	24.3	25.1	24.8	25.6	26.0
	8H	24.1	24.8	24.6	25.3	25.8	24.4	25.2	24.9	25.6	26.1
	12H	24.2	24.8	24.7	25.3	25.8	24.5	25.1	25.0	25.6	26.1
8H	4H	23.9	24.6	24.4	25.0	25.5	24.1	24.8	24.6	25.3	25.8
	6H	24.1	24.7	24.6	25.2	25.7	24.5	25.0	25.0	25.5	26.0
	8H	24.2	24.8	24.7	25.2	25.8	24.6	25.1	25.1	25.6	26.1
	12H	24.3	24.7	24.8	25.2	25.8	24.7	25.1	25.2	25.6	26.2
12H	4H	23.9	24.5	24.4	25.0	25.5	24.1	24.7	24.6	25.2	25.7
	6H	24.2	24.7	24.7	25.1	25.7	24.5	25.0	25.0	25.5	26.0
	8H	24.3	24.7	24.8	25.2	25.7	24.6	25.0	25.1	25.5	26.1

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 2250</b>
			<b>B = 58</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		38143.6	37669.5	39700.7	43242.7	41141.7	35261.7	32184.5	
50°		29719.0	29176.8	29591.0	31794.9	31958.6	28425.2	25362.3	
55°		23081.9	22159.3	21569.2	23053.4	24961.6	22766.8	19941.7	
60°		18528.5	17217.6	16083.6	17215.7	19692.6	18212.1	16113.3	
65°		15605.7	13969.5	12540.8	13489.7	15821.3	15178.2	13825.0	
70°		13588.5	11866.5	10157.8	11045.7	13002.5	13255.1	12606.4	
75°		11807.9	10015.7	8382.6	9183.9	10854.3	11790.2	11726.5	
80°		10073.7	8254.4	6696.8	7332.6	8780.4	10060.1	10384.1	
85°		7225.0	5844.8	4842.8	5381.6	6370.2	7515.4	7828.7	

**Photometric test report**


**Family**  
**Licross® 11 Recessed**

**Order number: 51TL12DV4FXG**  
**EAN: 4058352922354**

**LP number**  
**58637\_158**

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°  
   $\gamma$  70°  
   $\gamma$  75°  
   $\gamma$  80°  
   $\gamma$  85°

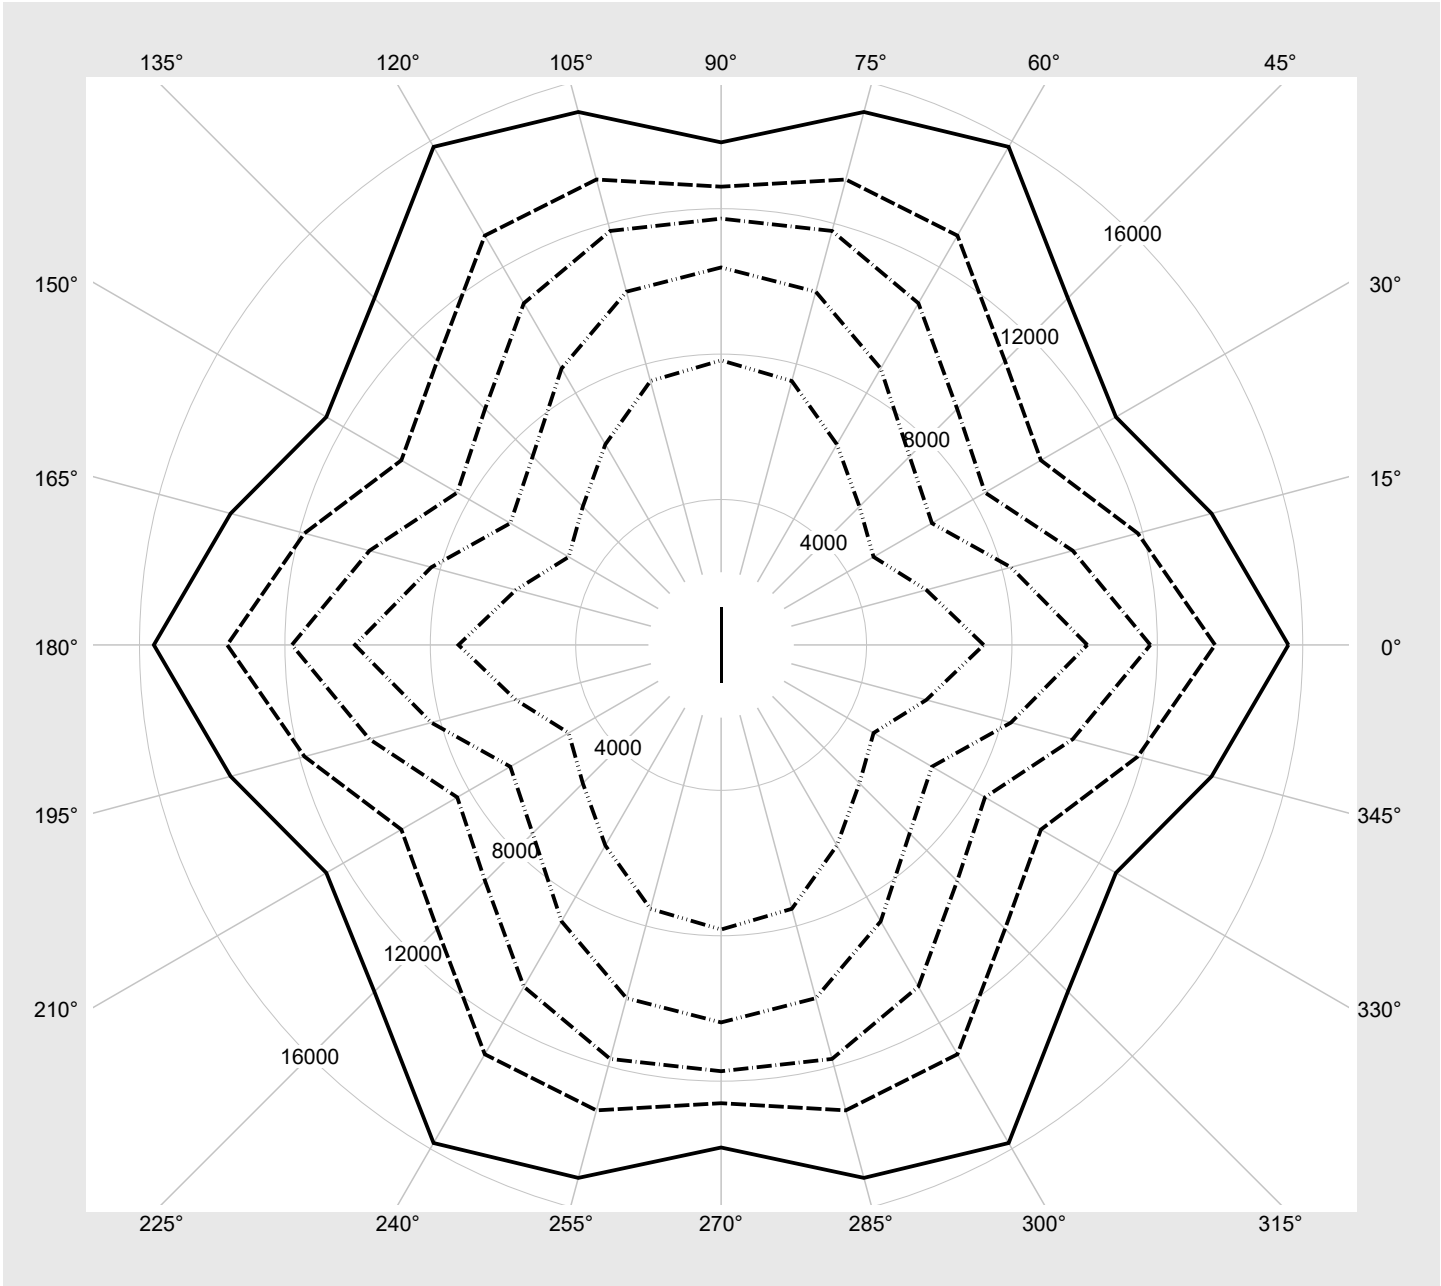

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL12DV4FXG</b> <b>EAN: 4058352922354</b>	<b>LP number</b> <b>58637_158</b>
---------------------------------------	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15360	84.1
95	240	252	14585	79.4
90	226	250	13797	74.7
85	213	248	13061	70.4
80	199	245	12264	65.7
75	186	243	11512	61.4
70	173	240	10758	57.0
65	160	237	9996	52.7
60	147	234	9226	48.5
55	134	231	8444	44.2
50	121	227	7659	40.0
45	109	223	6928	36.2
40	96	218	6125	32.1
35	84	213	5383	28.2
30	72	208	4632	24.5
25	59	201	3809	20.4
20	47	192	3046	16.4
15	35	181	2276	12.3
10	24	168	1563	8.5
5	12	142	776	4.2
2	4	102	250	1.3