
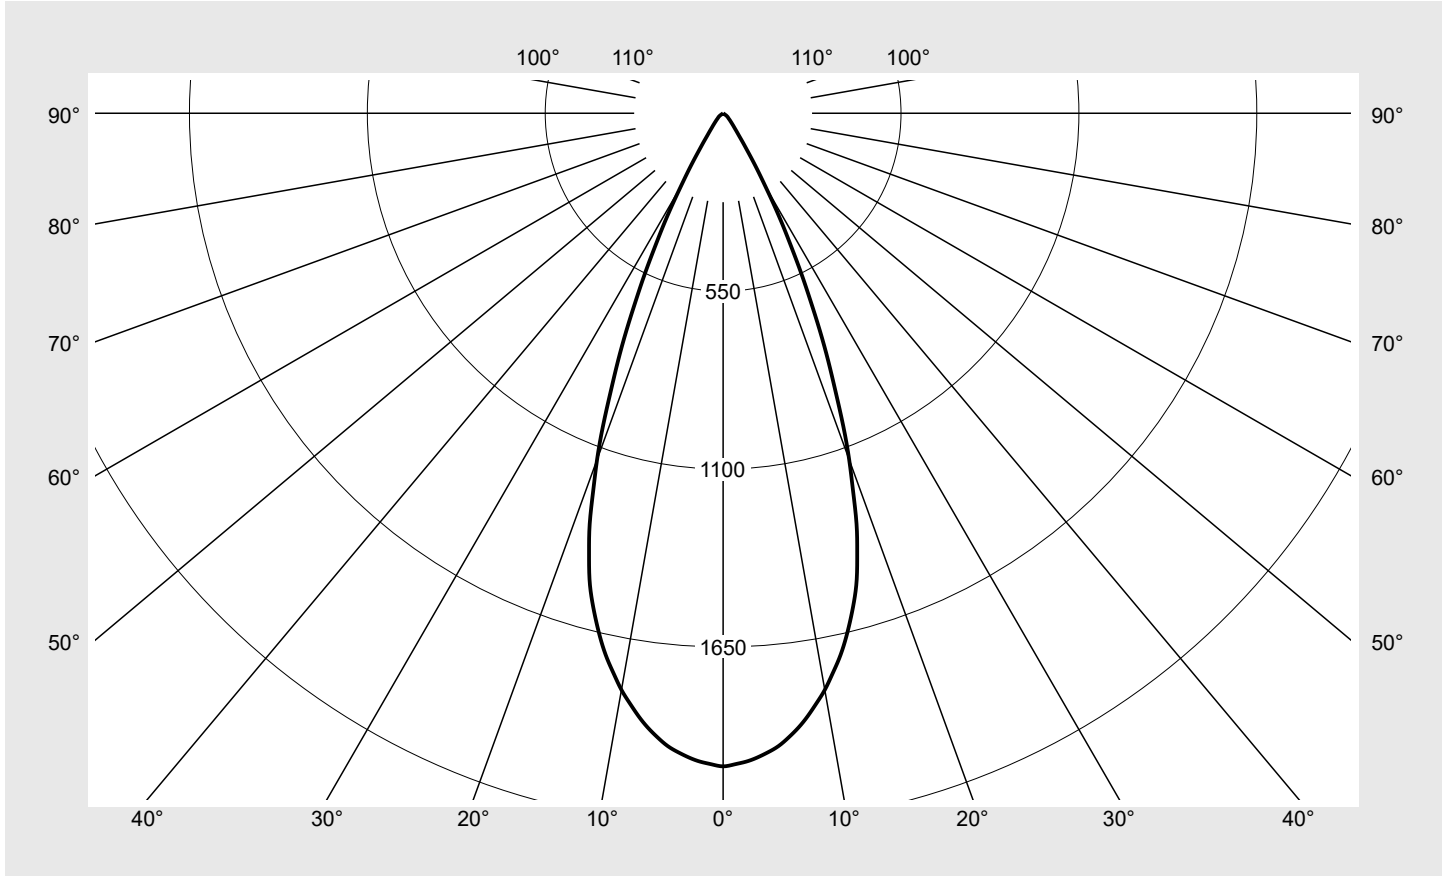


Photometric test report

Family Spot 31 slim	Order number: 51SF337FA2B EAN: 4058352746271	LP number 59470_3
	Version Combined lens and reflector optics, medium distribution	serial documentation 09.08.2023
	Lamps LED 2700 K CRI ≥ 90	
Controlgear ECG		
Rated values Net luminous flux = 2150 lm Power consumption = 17.6 W Luminous efficacy = 122.2 lm/W		

Luminous intensity in cd/klm C180-0 **Imax: 2019 cd/klm**



Classifications	
DIN 5040	A 8 0
CIE	N1=97 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 31 slim	Order number: 51SF337FA2B EAN: 4058352746271	LP number 59470_3
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
0°	2019.2	0.5	0.5
1°	2013.4	3.9	4.3
2°	2006.2	7.7	12.0
3°	1995.1	11.5	23.5
4°	1980.8	15.2	38.6
5°	1964.0	18.8	57.4
6°	1940.2	22.2	79.6
7°	1913.4	25.6	105.2
8°	1881.8	28.7	133.9
9°	1846.5	31.7	165.6
10°	1810.3	34.5	200.1
11°	1767.4	37.0	237.1
12°	1724.3	39.3	276.4
13°	1675.3	41.3	317.7
14°	1620.8	43.0	360.7
15°	1563.4	44.4	405.1
16°	1498.7	45.3	450.4
17°	1417.9	45.5	495.8
18°	1334.9	45.2	541.1
19°	1233.5	44.0	585.1
20°	1139.5	42.7	627.8
21°	1037.2	40.8	668.6
22°	928.2	38.1	706.7
23°	831.6	35.6	742.4
24°	734.7	32.8	775.1
25°	637.9	29.6	804.7
26°	552.0	26.5	831.2
27°	467.3	23.3	854.5
28°	395.6	20.4	874.9
29°	326.8	17.4	892.2
30°	262.9	14.4	906.6
31°	213.7	12.1	918.7
32°	171.6	10.0	928.7
33°	135.7	8.1	936.8
34°	110.7	6.8	943.6
35°	89.9	5.7	949.2
36°	76.1	4.9	954.1
37°	65.6	4.3	958.5
38°	57.0	3.8	962.3
39°	50.9	3.5	965.8
40°	45.3	3.2	969.0
41°	40.5	2.9	971.9
42°	36.5	2.7	974.6
43°	33.0	2.5	977.1
44°	30.3	2.3	979.4
45°	27.4	2.1	981.5
46°	24.5	1.9	983.4

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
47°	22.8	1.8	985.3
48°	21.3	1.7	987.0
49°	19.7	1.6	988.6
50°	18.9	1.6	990.2
51°	17.5	1.5	991.7
52°	15.5	1.3	993.0
53°	13.7	1.2	994.2
54°	11.8	1.0	995.3
55°	9.9	0.9	996.2
56°	8.1	0.7	996.9
57°	6.8	0.6	997.5
58°	5.8	0.5	998.1
59°	4.8	0.4	998.5
60°	3.9	0.4	998.9
61°	3.2	0.3	999.2
62°	2.5	0.2	999.4
63°	1.8	0.2	999.6
64°	1.3	0.1	999.7
65°	1.0	0.1	999.8
66°	0.5	0.1	999.9
67°	0.1	0.0	999.9
68°	0.0	0.0	999.9
69°	0.0	0.0	999.9
70°	0.0	0.0	999.9
71°	0.0	0.0	999.9
72°	0.0	0.0	999.9
73°	0.0	0.0	999.9
74°	0.0	0.0	999.9
75°	0.0	0.0	999.9
76°	0.0	0.0	999.9
77°	0.0	0.0	999.9
78°	0.0	0.0	999.9
79°	0.0	0.0	999.9
80°	0.0	0.0	999.9
81°	0.0	0.0	999.9
82°	0.0	0.0	999.9
83°	0.0	0.0	999.9
84°	0.0	0.0	999.9
85°	0.0	0.0	1000.0
86°	0.0	0.0	1000.0
87°	0.0	0.0	1000.0
88°	0.0	0.0	1000.0
89°	0.1	0.0	1000.0
90°	0.5	0.1	1000.0

Photometric test report

Family Spot 31 slim	Order number: 51SF337FA2B EAN: 4058352746271	LP number 59470_3
-------------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.6	18.6	18.0	19.0	19.3	17.6	18.6	18.0	19.0	19.3
	3H	17.5	18.3	17.8	18.7	19.0	17.5	18.3	17.8	18.7	19.0
	4H	17.4	18.2	17.8	18.5	18.9	17.4	18.2	17.8	18.5	18.9
	6H	17.3	18.0	17.7	18.4	18.8	17.3	18.0	17.7	18.4	18.8
	8H	17.4	17.9	17.8	18.3	18.7	17.4	17.9	17.8	18.3	18.7
	12H	17.3	17.8	17.8	18.2	18.6	17.3	17.8	17.8	18.2	18.6
4H	2H	17.4	18.2	17.8	18.6	19.0	17.4	18.2	17.8	18.6	19.0
	3H	17.2	17.9	17.6	18.3	18.7	17.2	17.9	17.6	18.3	18.7
	4H	17.1	17.7	17.5	18.1	18.5	17.1	17.7	17.5	18.1	18.5
	6H	17.0	17.5	17.4	17.9	18.4	17.0	17.5	17.4	17.9	18.4
	8H	17.0	17.4	17.4	17.8	18.3	17.0	17.4	17.4	17.8	18.3
	12H	16.9	17.3	17.4	17.7	18.2	16.9	17.3	17.4	17.7	18.2
8H	4H	17.0	17.4	17.4	17.8	18.3	17.0	17.4	17.4	17.8	18.3
	6H	16.8	17.2	17.3	17.6	18.2	16.8	17.2	17.3	17.6	18.2
	8H	16.7	17.0	17.3	17.5	18.1	16.7	17.0	17.3	17.5	18.1
	12H	16.7	16.9	17.2	17.4	18.0	16.7	16.9	17.2	17.4	18.0
12H	4H	16.9	17.3	17.4	17.7	18.2	16.9	17.3	17.4	17.7	18.2
	6H	16.8	17.0	17.3	17.5	18.1	16.8	17.0	17.3	17.5	18.1
	8H	16.7	16.9	17.2	17.4	18.0	16.7	16.9	17.2	17.4	18.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 52
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	39168.9
50°	29741.9
55°	17396.1
60°	7951.2
65°	2469.7
70°	41.4
75°	0.0
80°	0.0
85°	162.6

Photometric test report

Family Spot 31 slim	Order number: 51SF337FA2B EAN: 4058352746271	LP number 59470_3
-------------------------------	---	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

