


Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4AXG3S4 EAN: 4058352934784	LP number 58637_195
	Version cover frosted, wide distribution, high visual comfort Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 10240 lm Power consumption = 60.5 W Luminous efficacy = 169.2 lm/W	serial documentation 29.09.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 498 cd/klm**

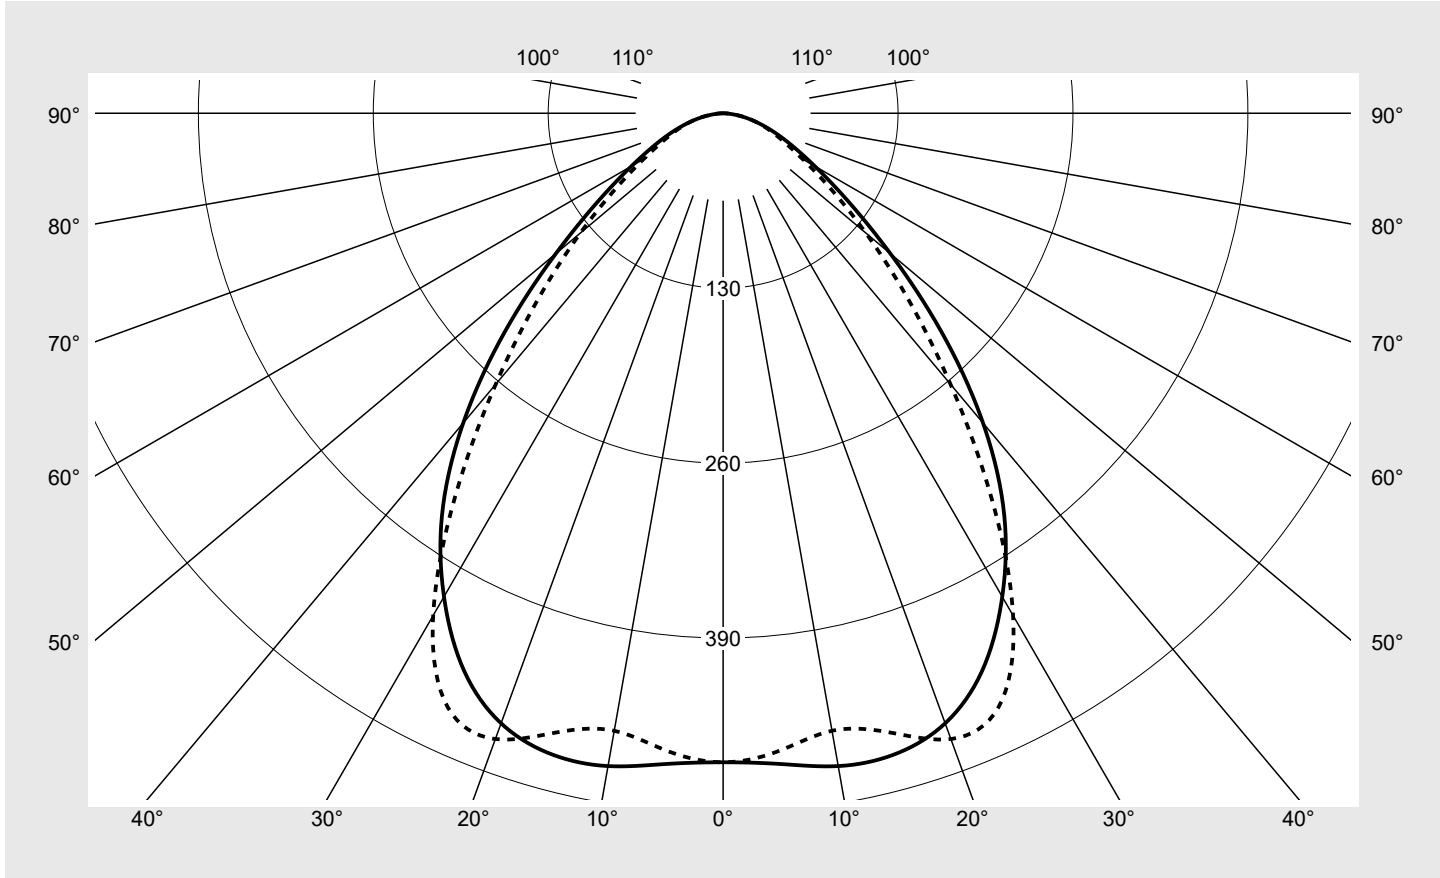

Classifications	
DIN 5040	A 5 0
CIE	N1=67 N2=92 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4AXG3S4 EAN: 4058352934784	LP number 58637_195
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	482.3	482.3	482.3	482.3	482.3	482.3	482.3	2.9	2.9
5°	485.4	482.8	478.2	477.5	477.4	475.9	475.7	22.9	25.8
10°	492.7	488.2	477.9	471.3	467.6	465.9	466.0	45.2	71.0
15°	493.2	486.1	471.9	467.9	471.0	473.7	476.3	67.5	138.5
20°	482.5	473.5	462.5	471.9	487.1	492.8	494.9	89.9	228.4
25°	456.4	447.1	449.2	479.4	497.6	491.1	485.8	109.5	337.8
30°	414.9	406.8	427.0	475.1	479.0	447.1	431.1	121.4	459.2
35°	364.2	358.0	387.7	436.7	420.7	368.9	346.8	122.0	581.2
40°	300.5	296.3	322.5	357.9	336.0	284.8	262.9	110.4	691.6
45°	229.2	226.3	238.5	259.8	247.2	211.8	193.4	90.1	781.7
50°	162.3	159.3	161.6	173.6	174.5	155.2	138.5	68.2	849.9
55°	112.5	108.0	105.1	112.3	121.6	110.9	97.2	49.6	899.5
60°	78.7	73.1	68.3	73.1	83.7	77.4	68.5	35.5	935.0
65°	56.0	50.2	45.0	48.4	56.8	54.5	49.6	25.5	960.5
70°	39.5	34.5	29.5	32.1	37.8	38.5	36.6	18.1	978.6
75°	26.0	22.0	18.4	20.2	23.9	25.9	25.8	12.0	990.6
80°	14.9	12.2	9.9	10.8	13.0	14.8	15.3	6.8	997.4
85°	5.4	4.3	3.6	4.0	4.7	5.6	5.8	2.5	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4AXG3S4 EAN: 4058352934784	LP number 58637_195
---------------------------------------	---	-------------------------------

siteco

UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.7	24.2	23.1	24.5	24.8	22.8	24.3	23.2	24.6	24.9
	3H	23.2	24.6	23.6	24.9	25.2	23.4	24.7	23.7	25.0	25.4
	4H	23.5	24.7	23.8	25.0	25.4	23.6	24.8	24.0	25.2	25.5
	6H	23.6	24.7	24.0	25.1	25.5	23.8	24.9	24.2	25.3	25.7
	8H	23.7	24.7	24.1	25.1	25.5	23.9	24.9	24.3	25.3	25.7
	12H	23.7	24.7	24.2	25.1	25.5	23.9	24.9	24.4	25.3	25.7
4H	2H	22.9	24.2	23.3	24.5	24.9	23.0	24.3	23.4	24.6	25.0
	3H	23.5	24.6	24.0	25.0	25.4	23.7	24.8	24.2	25.1	25.6
	4H	23.8	24.7	24.3	25.1	25.6	24.1	25.0	24.5	25.4	25.8
	6H	24.0	24.8	24.5	25.3	25.7	24.3	25.1	24.8	25.6	26.0
	8H	24.1	24.8	24.6	25.3	25.8	24.4	25.2	24.9	25.6	26.1
	12H	24.2	24.8	24.7	25.3	25.8	24.5	25.1	25.0	25.6	26.1
8H	4H	23.9	24.6	24.4	25.0	25.5	24.1	24.8	24.6	25.3	25.8
	6H	24.1	24.7	24.6	25.2	25.7	24.5	25.0	25.0	25.5	26.0
	8H	24.2	24.8	24.7	25.2	25.8	24.6	25.1	25.1	25.6	26.1
	12H	24.3	24.7	24.8	25.2	25.8	24.7	25.1	25.2	25.6	26.2
12H	4H	23.9	24.5	24.4	25.0	25.5	24.1	24.7	24.6	25.2	25.7
	6H	24.2	24.7	24.7	25.1	25.7	24.5	25.0	25.0	25.5	26.0
	8H	24.3	24.7	24.8	25.2	25.7	24.6	25.0	25.1	25.5	26.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		38143.6	37669.5	39700.7	43242.7	41141.7	35261.7	32184.5	
50°		29719.0	29176.8	29591.0	31794.9	31958.6	28425.2	25362.3	
55°		23081.9	22159.3	21569.2	23053.4	24961.6	22766.8	19941.7	
60°		18528.5	17217.6	16083.6	17215.7	19692.6	18212.1	16113.3	
65°		15605.7	13969.5	12540.8	13489.7	15821.3	15178.2	13825.0	
70°		13588.5	11866.5	10157.8	11045.7	13002.5	13255.1	12606.4	
75°		11807.9	10015.7	8382.6	9183.9	10854.3	11790.2	11726.5	
80°		10073.7	8254.4	6696.8	7332.6	8780.4	10060.1	10384.1	
85°		7225.0	5844.8	4842.8	5381.6	6370.2	7515.4	7828.7	


Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4AXG3S4 EAN: 4058352934784	LP number 58637_195
--	---	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

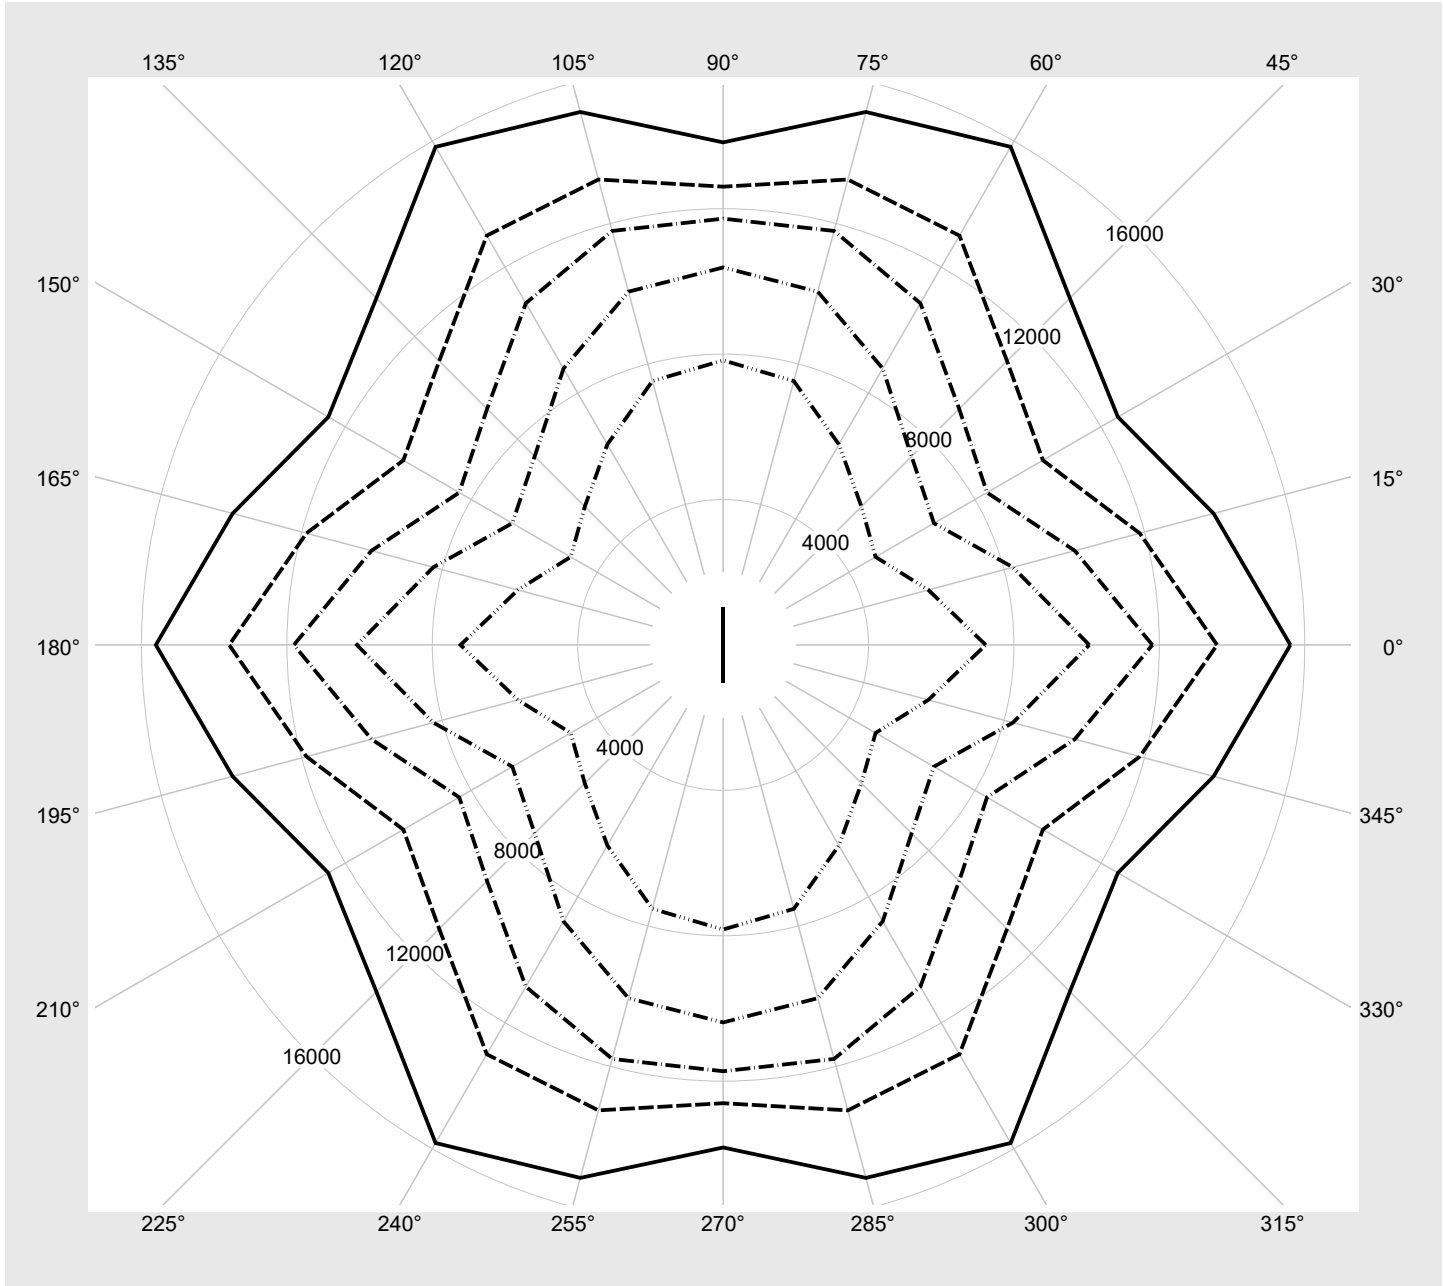

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4AXG3S4 EAN: 4058352934784	LP number 58637_195
---------------------------------------	---	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10240	60.5
95	240	252	9723	57.4
90	226	250	9198	54.2
85	213	248	8708	51.3
80	199	245	8176	48.2
75	186	243	7674	45.3
70	173	240	7172	42.3
65	160	237	6664	39.5
60	147	234	6151	36.6
55	134	231	5629	33.7
50	121	227	5106	31.0
45	109	223	4619	28.4
40	96	218	4083	25.7
35	84	213	3588	23.1
30	72	208	3088	20.7
25	60	201	2581	18.2
20	47	192	2030	15.4
15	35	181	1517	12.9
10	24	168	1042	10.6
5	12	142	517	8.2
2	4	102	167	6.6