

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE12DN4EXM3S4
EAN: 4058352934852

LP number
58689_133



Version cover frosted, wide distribution, high visual comfort

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting emergency light operation: 3 h

Rated values Net luminous flux = 1000 lm
Power consumption = 7.2 W
Luminous efficacy = 138.9 lm/W

serial
documentation
29.09.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 575 cd/klm

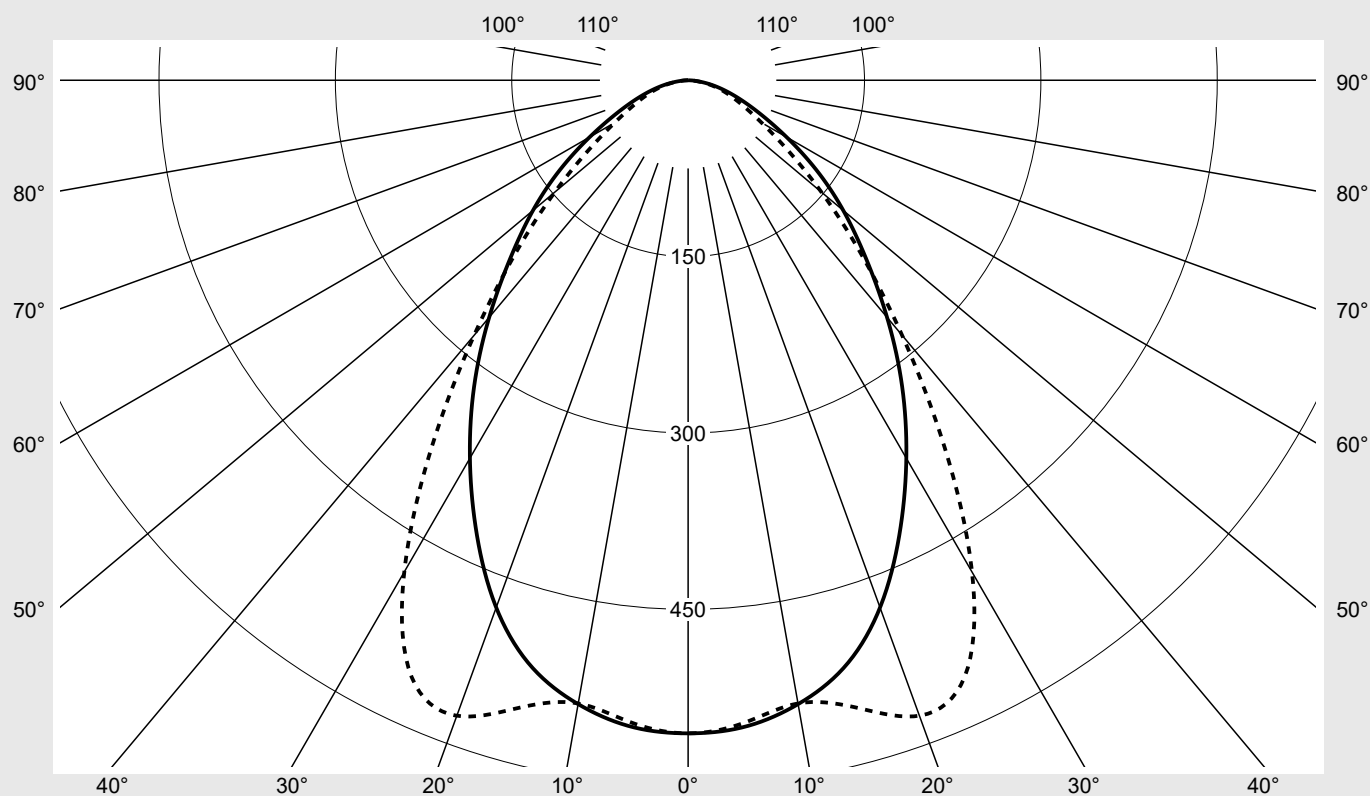

Classifications

DIN 5040 A 5 0
CIE N1=66 N2=91 N3=98
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE12DN4EXM3S4 EAN: 4058352934852	LP number 58689_133
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	555.4	555.4	555.4	555.4	555.4	555.4	555.4	3.3	3.3
5°	551.9	549.3	545.0	546.0	548.1	548.0	548.5	26.2	29.5
10°	538.7	535.0	528.7	529.1	532.7	535.9	538.2	50.8	80.3
15°	515.9	510.9	504.6	513.1	530.5	544.7	552.3	74.2	154.5
20°	477.2	471.4	470.1	497.6	537.0	563.7	575.1	95.8	250.2
25°	425.5	419.5	426.9	469.4	521.2	548.6	558.0	111.1	361.3
30°	371.2	364.3	378.4	421.3	459.9	477.2	482.9	115.5	476.8
35°	317.2	309.8	328.6	357.7	367.8	374.7	379.7	109.4	586.2
40°	263.2	255.5	280.4	291.4	277.2	277.7	283.1	97.2	683.4
45°	213.7	204.0	230.1	230.5	202.8	200.2	207.0	82.5	765.9
50°	172.3	160.2	177.2	176.6	149.6	143.3	148.0	67.7	833.6
55°	133.3	121.6	126.4	129.1	111.8	101.0	103.0	53.0	886.6
60°	96.7	87.9	85.2	90.2	83.1	71.0	72.1	39.7	926.3
65°	67.7	61.0	56.3	61.1	60.5	50.8	52.1	29.0	955.3
70°	46.9	41.7	36.5	40.2	42.1	36.4	38.1	20.6	975.8
75°	30.9	26.7	22.6	25.0	27.1	24.7	26.6	13.7	989.5
80°	17.8	14.8	12.0	13.1	14.7	14.1	15.6	7.7	997.1
85°	6.6	5.4	4.4	4.8	5.3	5.4	5.9	2.9	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed		Order number: 51TE12DN4EXM3S4 EAN: 4058352934852							LP number 58689_133	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	14.9	16.4	15.2	16.7	17.0	14.3	15.8	14.7	16.1
	3H	15.6	16.9	16.0	17.3	17.6	14.9	16.3	15.3	16.6
	4H	15.9	17.1	16.3	17.5	17.9	15.2	16.4	15.6	16.8
	6H	16.1	17.3	16.5	17.6	18.0	15.4	16.5	15.8	16.9
	8H	16.3	17.3	16.7	17.7	18.1	15.5	16.6	16.0	16.9
	12H	16.3	17.2	16.7	17.6	18.1	15.6	16.5	16.0	16.9
4H	2H	15.2	16.4	15.6	16.8	17.2	14.8	16.0	15.2	16.4
	3H	16.0	17.1	16.5	17.4	17.9	15.6	16.6	16.0	17.0
	4H	16.4	17.3	16.8	17.7	18.1	15.9	16.8	16.3	17.2
	6H	16.7	17.5	17.1	17.9	18.4	16.2	17.0	16.6	17.4
	8H	16.8	17.5	17.2	17.9	18.4	16.3	17.0	16.8	17.4
	12H	16.9	17.5	17.3	17.9	18.4	16.4	17.0	16.8	17.4
8H	4H	16.5	17.2	16.9	17.6	18.1	16.0	16.7	16.5	17.2
	6H	16.8	17.4	17.3	17.9	18.4	16.4	17.0	16.9	17.4
	8H	16.9	17.4	17.4	17.9	18.4	16.5	17.0	17.0	17.5
	12H	17.0	17.4	17.5	17.9	18.5	16.6	17.0	17.1	17.5
12H	4H	16.5	17.1	17.0	17.6	18.1	16.0	16.7	16.5	17.1
	6H	16.8	17.3	17.3	17.8	18.3	16.4	16.9	16.9	17.4
	8H	17.0	17.4	17.5	17.9	18.4	16.5	17.0	17.1	17.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	3473.8	3315.9	3739.7	3746.3	3296.8	3253.9	3365.4
50°	3080.5	2865.4	3169.0	3158.5	2675.3	2562.5	2646.4
55°	2671.8	2436.0	2532.2	2586.6	2239.9	2024.6	2064.1
60°	2222.4	2020.2	1959.3	2073.1	1911.1	1632.4	1656.6
65°	1840.8	1659.8	1532.0	1660.8	1646.1	1382.8	1416.0
70°	1575.7	1402.9	1227.0	1351.7	1415.2	1224.1	1280.6
75°	1373.8	1184.4	1002.3	1108.2	1202.5	1095.5	1180.3
80°	1176.2	977.2	792.7	870.4	970.1	935.9	1033.0
85°	869.5	712.3	579.4	629.2	695.9	707.9	774.7

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE12DN4EXM3S4
EAN: 4058352934852

LP number
58689_133

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

