


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, extremely wide distribution with an additional rear light component (ST1.0ST0.5) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 3480 lm Power consumption = 22.3 W Luminous efficacy = 156.1 lm/W	serial documentation 28.09.2023





Luminous intensity in cd/klm C180-0 C200-20 C205-25 C270-90 **Imax: 633 cd/klm**

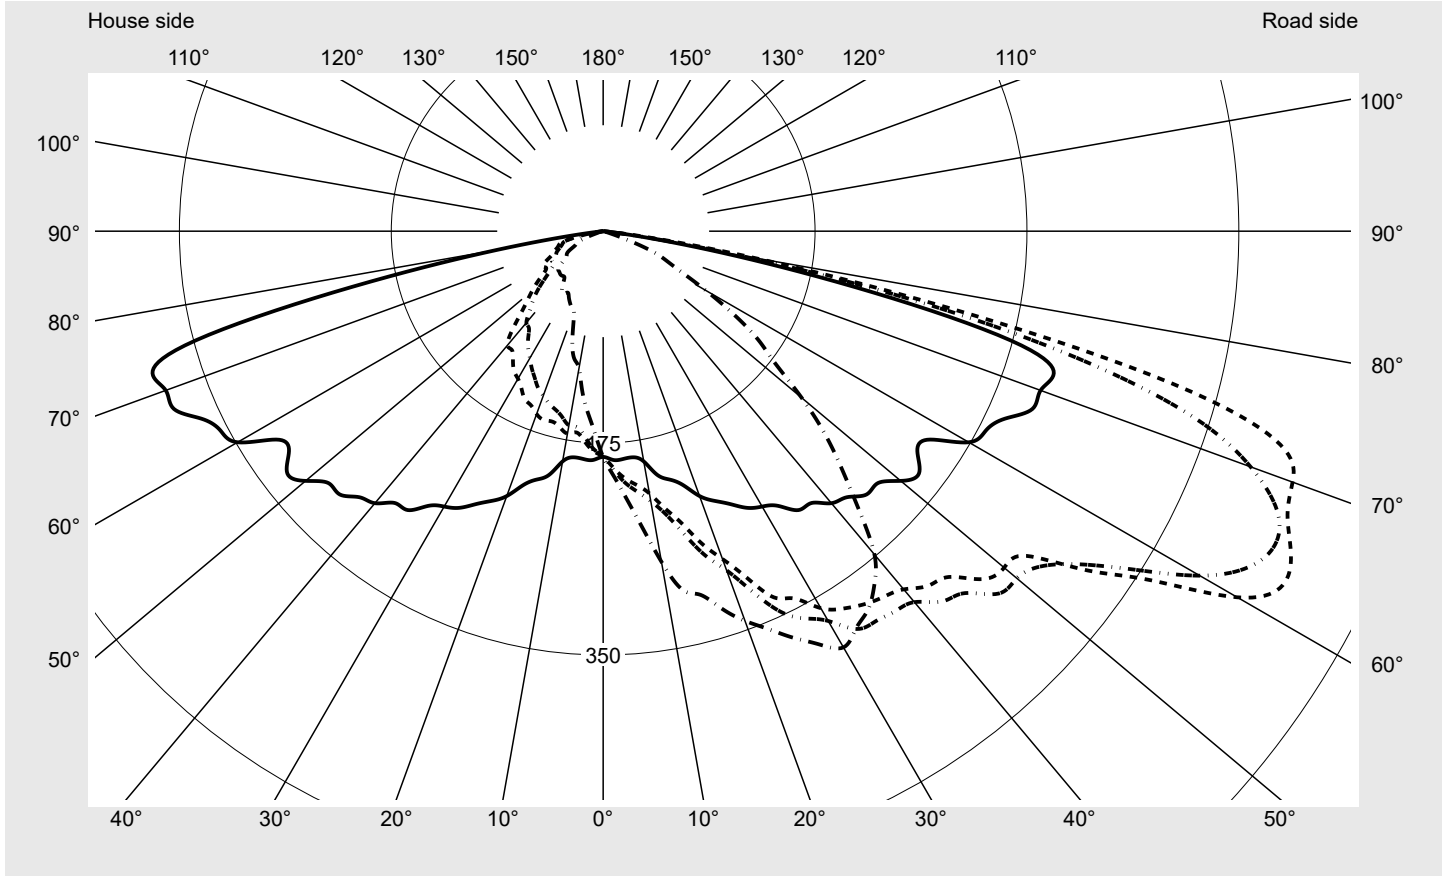


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G2
Imax 70°	629.2
Imax 80°	139.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
--	--	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

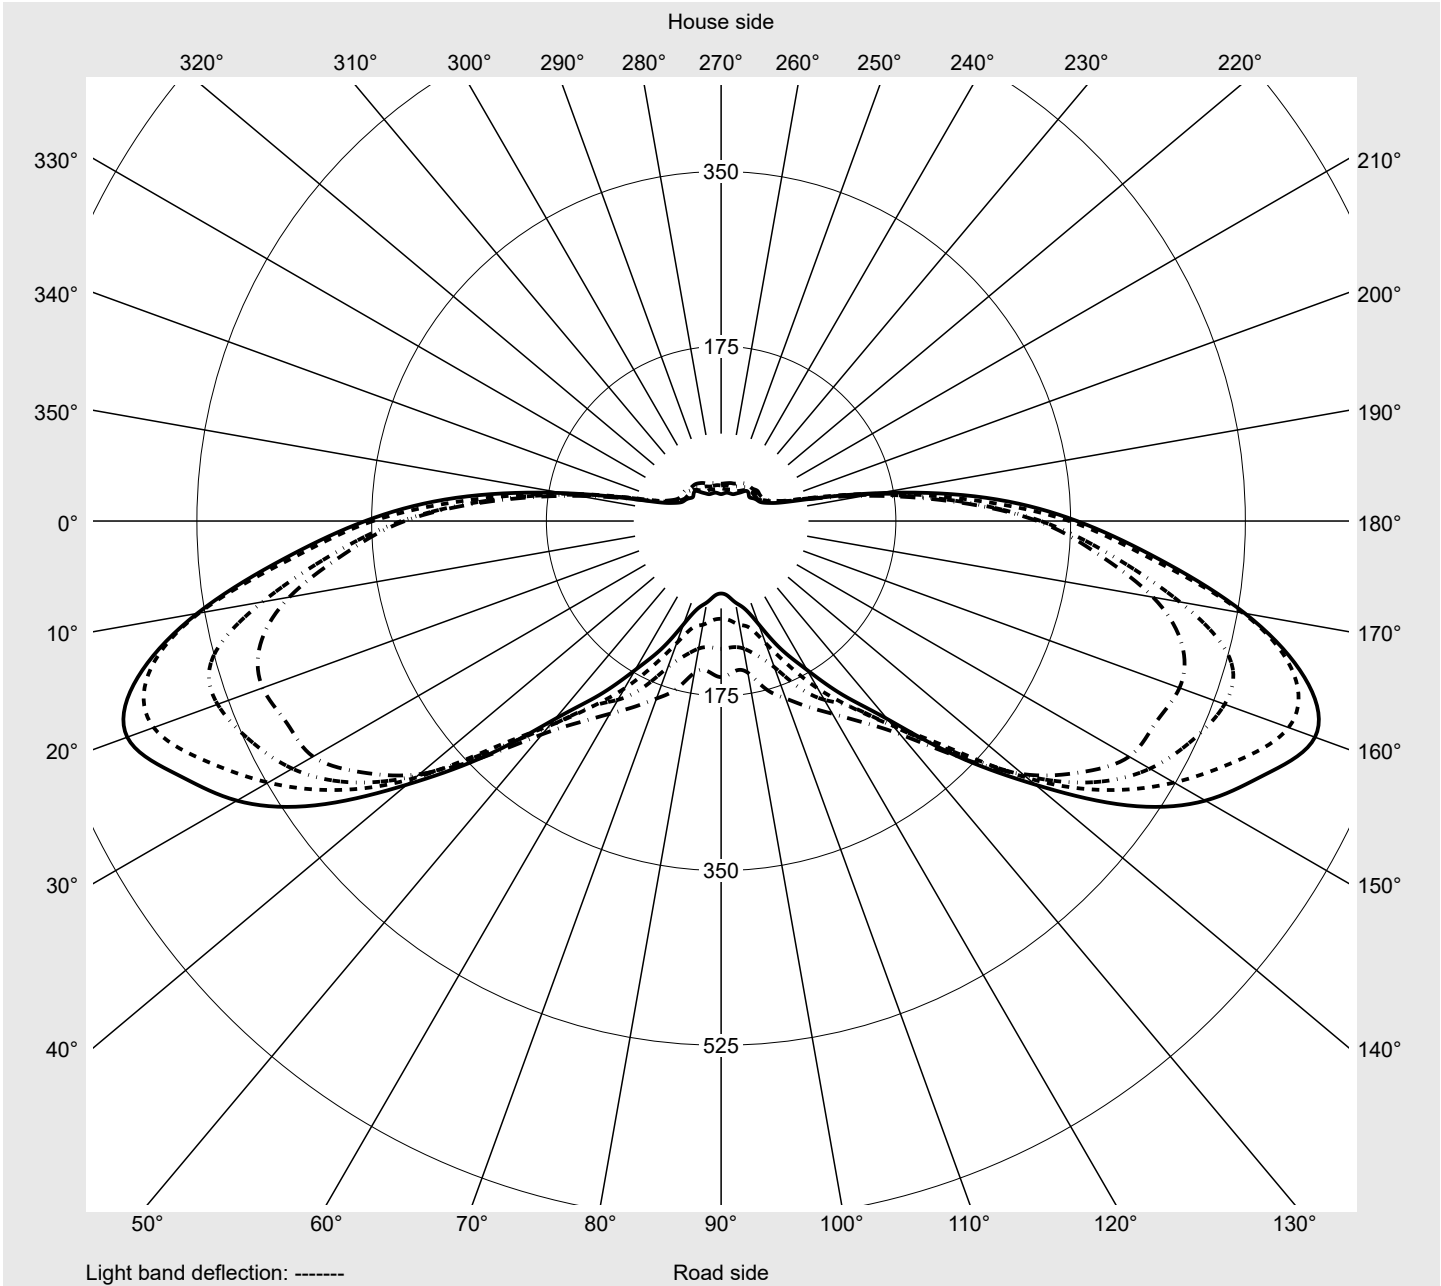

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	189.1	190.8	192.7	194.2	195.7	197.2	198.8	199.9	200.6	201.1	201.8	202.5	202.8
5,0°	188.9	193.0	197.2	201.2	204.8	208.6	212.0	214.5	216.9	219.2	220.0	220.3	221.0
7,5°	188.4	193.0	199.3	205.4	211.4	217.1	223.0	227.3	229.9	231.8	232.7	234.3	237.2
10,0°	193.1	198.8	206.8	213.9	219.9	226.4	232.6	239.3	244.2	249.3	254.5	257.4	260.7
12,5°	206.1	214.5	220.8	229.0	234.2	239.5	247.4	255.4	263.7	269.7	275.8	281.1	282.8
15,0°	212.4	223.0	233.6	241.8	249.4	259.1	265.4	271.2	278.7	287.0	296.3	302.5	306.5
17,5°	220.0	234.8	248.9	260.3	270.3	281.0	287.0	292.5	297.2	298.8	300.7	308.4	316.0
20,0°	232.8	246.6	256.8	271.0	288.2	298.1	309.0	320.0	321.0	323.0	320.5	321.7	328.5
22,5°	241.1	260.5	276.3	292.4	309.7	322.2	331.0	340.9	346.7	342.2	337.7	339.5	342.2
25,0°	248.7	270.3	293.7	315.2	333.7	346.8	356.0	365.1	365.2	355.8	353.6	354.5	353.5
27,5°	257.6	281.7	302.6	322.4	342.0	360.6	372.8	377.7	374.3	365.9	364.2	362.2	365.3
30,0°	262.6	288.5	312.2	342.2	359.5	371.7	384.8	388.7	385.2	379.7	380.1	374.5	372.6
32,5°	269.0	299.5	326.2	351.9	369.5	389.5	398.3	399.7	400.6	394.7	389.4	382.1	383.0
35,0°	281.2	304.9	333.4	360.8	376.1	393.0	396.5	399.9	400.2	397.3	392.2	383.8	382.1
37,5°	282.9	313.2	341.0	363.0	380.7	395.8	404.2	405.6	399.2	394.3	385.1	377.4	370.1
40,0°	293.3	324.4	349.0	369.5	386.2	399.9	411.5	406.9	400.5	388.2	373.4	363.7	354.4
42,5°	298.0	325.8	359.6	379.7	397.3	414.7	420.3	411.0	393.5	382.0	371.4	360.9	349.4
45,0°	307.6	333.9	374.0	394.1	403.9	422.7	423.7	415.2	397.5	386.4	366.4	340.7	330.5
47,5°	307.9	346.6	385.6	408.8	425.3	443.0	438.7	417.3	399.5	392.0	354.4	317.1	306.5
50,0°	320.8	363.3	394.0	416.7	432.3	445.9	447.4	426.9	402.0	371.5	339.7	306.2	280.5
52,5°	328.8	373.5	413.5	436.4	440.5	455.0	453.5	419.4	386.4	352.0	313.5	273.9	247.9
55,0°	316.8	378.8	439.2	477.8	488.5	479.6	471.8	438.8	394.3	332.9	278.8	245.8	222.9
57,5°	320.3	392.1	466.4	526.9	536.6	520.2	495.9	455.9	396.4	325.1	268.5	227.1	206.7
60,0°	348.7	432.1	530.9	593.9	604.8	569.0	523.8	469.6	400.2	320.2	267.7	227.7	193.6
62,5°	356.4	440.6	532.7	604.8	632.9	600.9	560.0	496.4	410.7	332.0	258.8	212.8	172.3
65,0°	366.3	443.3	517.3	584.8	626.7	612.3	587.0	509.4	423.9	335.1	243.0	190.5	156.0
67,5°	383.7	483.7	552.0	599.5	611.8	602.4	564.6	502.1	415.0	323.2	230.4	170.4	139.3
70,0°	384.5	510.1	619.9	629.2	605.9	569.0	499.5	446.2	376.6	305.7	212.8	153.8	121.9
72,5°	390.2	514.5	629.8	623.0	586.5	511.7	425.7	373.8	335.1	287.0	199.2	105.2	63.2
75,0°	348.2	447.8	521.6	521.4	487.1	406.3	322.5	296.1	262.0	185.8	87.8	31.9	11.7
77,5°	212.1	289.8	322.0	319.4	290.5	260.8	217.4	169.2	100.5	41.0	13.2	4.9	3.3
80,0°	89.2	118.6	134.9	139.7	125.2	107.6	78.1	36.2	11.2	4.3	3.3	3.1	2.4
82,5°	17.9	22.7	26.1	30.7	31.1	21.8	8.8	2.6	2.1	1.9	1.8	1.7	1.6
85,0°	1.5	1.6	1.6	1.6	1.7	1.6	1.4	1.3	1.3	1.2	1.1	1.0	0.9
87,5°	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	202.5	202.1	202.5	202.6	202.6	202.6	187.3	185.4	183.6	181.9	180.1	178.0	176.6
5,0°	221.0	220.8	221.0	221.5	222.4	221.8	185.5	181.6	178.1	174.4	170.7	167.4	164.1
7,5°	239.3	240.4	242.0	243.9	245.6	246.6	183.0	177.6	172.3	167.7	163.4	159.3	155.2
10,0°	263.9	267.0	270.9	273.3	276.4	277.2	187.4	182.0	175.8	169.7	162.8	156.0	149.3
12,5°	285.7	289.2	292.2	297.0	301.3	303.4	196.2	185.7	175.5	165.7	157.0	150.2	143.8
15,0°	308.6	308.6	312.1	312.9	310.6	311.0	200.7	187.3	174.0	162.8	152.5	142.7	134.3
17,5°	320.2	320.9	325.5	328.5	328.1	327.1	205.6	190.7	176.9	163.4	149.0	136.4	126.7
20,0°	334.6	339.0	341.4	342.8	340.5	342.5	214.0	195.6	177.6	160.7	144.5	131.9	121.0
22,5°	347.0	353.5	357.9	360.0	357.2	355.5	216.2	194.8	173.9	155.7	140.2	126.0	113.6
25,0°	358.3	363.1	366.4	368.2	369.2	370.3	221.5	196.9	176.1	153.0	133.7	118.2	106.4
27,5°	370.6	372.0	376.1	380.8	383.1	384.5	228.0	200.2	172.0	146.2	127.7	111.4	96.3
30,0°	375.2	377.8	383.2	389.6	395.7	396.9	232.8	201.5	167.3	140.7	121.0	103.2	87.4
32,5°	381.9	378.9	387.4	397.0	396.9	388.8	235.0	197.9	164.2	137.0	115.2	97.2	83.2
35,0°	381.1	379.9	381.2	392.0	387.5	381.5	240.3	196.6	159.5	129.9	108.0	91.5	79.9
37,5°	369.1	368.3	371.8	377.7	373.1	368.0	240.4	196.5	155.8	123.8	100.7	86.0	76.3
40,0°	354.0	354.2	350.6	349.4	349.3	348.6	242.4	200.0	157.4	123.0	98.6	81.5	71.0
42,5°	345.7	338.7	323.3	319.1	313.5	313.2	248.0	198.0	145.5	111.5	90.0	73.1	65.3
45,0°	323.5	313.1	303.9	294.4	284.5	279.7	254.9	191.5	132.5	96.3	82.5	68.2	61.4
47,5°	299.7	280.2	265.2	258.0	250.1	248.9	246.4	178.1	117.4	85.1	74.5	64.4	57.1
50,0°	262.5	247.2	236.7	223.4	214.2	214.0	248.1	166.3	99.4	76.5	65.2	58.1	53.2
52,5°	232.0	219.3	205.9	189.3	179.9	178.8	239.2	152.3	88.0	67.8	56.8	51.5	50.0
55,0°	205.2	189.2	174.4	154.3	151.1	156.3	229.5	145.0	81.4	59.3	50.8	47.4	46.8
57,5°	183.6	155.7	139.4	129.7	126.9	127.9	234.6	151.5	86.0	56.0	47.7	43.3	42.7
60,0°	159.2	130.1	110.8	105.5	99.8	97.9	248.1	157.2	87.1	57.8	48.8	43.4	42.2
62,5°	141.2	110.0	90.9	82.9	75.2	72.6	266.5	161.1	79.6	52.8	44.4	41.8	39.5
65,0°	124.5	94.9	71.3	63.6	59.2	57.7	266.3	153.7	69.4	46.8	42.7	40.1	36.6
67,5°	109.6	77.4	57.6	49.5	46.6	45.1	261.3	139.7	59.8	43.9	40.1	38.8	36.2
70,0°	86.5	52.3	33.9	25.7	23.5	23.4	247.9	129.2	56.0	40.5	37.4	35.9	35.7
72,5°	34.2	16.1	9.8	7.3	6.8	6.6	246.9	131.3	48.5	38.4	35.3	32.2	33.0
75,0°	4.4	3.5	3.5	3.4	3.3	3.2	219.3	115.7	37.6	34.7	33.1	30.0	29.0
77,5°	2.9	2.7	2.7	2.6	2.5	2.4	142.4	71.2	23.6	24.1	24.8	21.6	18.3
80,0°	2.2	2.1	1.9	1.8	1.7	1.7	58.6	31.9	12.4	12.7	12.4	9.6	6.4
82,5°	1.5	1.4	1.3	1.2	1.1	1.1	12.1	7.1	4.0	4.1	3.7	3.1	2.9
85,0°	0.8	0.8	0.7	0.7	0.6	0.6	1.4	1.3	1.2	1.1	1.1	1.0	1.0
87,5°	0.4	0.3	0.3	0.3	0.2	0.2	0.8	0.7	0.7	0.6	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	0.3	0.3
2,5°	174.6	173.3	171.4	170.1	169.3	168.4	167.7	166.7	166.2	166.1	165.7	2.2	2.5
5,0°	160.8	158.2	156.6	154.8	153.3	152.2	151.2	150.6	150.2	149.6	149.4	4.5	7.0
7,5°	151.8	148.3	145.2	142.0	138.4	135.9	134.3	133.2	132.9	133.1	132.8	6.8	13.8
10,0°	143.7	139.6	136.5	133.7	130.7	128.0	125.1	122.0	118.0	116.0	115.0	9.3	23.1
12,5°	137.2	131.3	127.0	123.9	120.4	117.3	114.4	111.1	109.5	108.7	108.6	12.0	35.0
15,0°	127.3	121.0	115.1	110.1	105.7	102.3	100.1	98.6	98.0	98.1	98.4	14.6	49.6
17,5°	118.0	109.9	104.1	99.2	95.2	90.5	86.8	85.5	84.8	83.6	82.4	17.3	66.9
20,0°	110.9	103.7	96.9	92.5	89.0	85.4	81.1	76.8	73.5	71.6	70.7	20.2	87.2
22,5°	103.0	94.1	88.7	85.5	83.1	79.1	76.5	74.5	71.9	69.3	67.9	23.4	110.5
25,0°	96.0	86.9	80.9	78.4	74.7	70.5	68.9	67.6	65.5	64.8	65.0	26.4	137.0
27,5°	87.5	82.5	77.8	73.4	69.0	66.1	64.3	63.6	63.5	62.2	61.4	29.3	166.3
30,0°	78.4	75.5	71.2	66.7	65.6	65.1	63.9	62.5	59.9	58.6	58.6	32.3	198.6
32,5°	75.4	70.7	66.4	64.0	63.9	62.1	59.3	58.3	58.2	59.6	61.4	35.1	233.7
35,0°	72.4	67.2	62.5	61.0	61.9	58.3	54.6	53.3	56.7	59.4	59.4	37.4	271.1
37,5°	69.3	65.1	62.1	59.7	58.1	57.1	56.3	53.9	53.2	54.1	54.3	39.2	310.3
40,0°	66.3	62.2	60.1	57.4	54.3	52.9	53.5	53.8	53.6	51.5	49.8	40.7	351.0
42,5°	62.8	60.2	55.7	54.3	52.9	52.6	52.5	52.3	51.9	50.5	50.0	42.0	393.0
45,0°	60.6	58.5	53.8	53.1	53.7	51.0	52.6	54.2	50.4	49.4	50.1	43.1	436.1
47,5°	54.0	53.6	52.7	51.3	48.2	47.0	48.3	49.3	47.4	46.7	49.3	43.6	479.7
50,0°	52.0	50.4	49.2	50.8	48.9	46.0	45.8	46.3	45.8	46.3	48.3	43.8	523.5
52,5°	51.1	48.7	45.8	47.3	47.6	45.0	42.5	42.6	43.4	43.4	42.8	43.5	566.9
55,0°	47.2	45.4	45.0	45.0	43.7	42.0	39.9	39.3	38.5	37.8	37.4	43.8	610.7
57,5°	44.8	43.4	43.0	41.4	39.0	38.2	36.8	36.0	36.1	36.1	35.7	45.0	655.8
60,0°	42.0	42.4	40.9	37.6	34.7	33.2	33.3	32.6	32.4	32.3	32.8	47.5	703.2
62,5°	37.1	38.9	39.3	35.3	32.1	29.7	29.1	29.1	28.8	27.7	27.0	48.5	751.7
65,0°	35.0	35.2	34.6	30.8	27.9	26.1	24.6	24.8	26.0	25.8	24.4	48.3	800.0
67,5°	34.2	31.7	28.6	25.9	24.9	23.5	21.3	20.8	22.4	22.6	21.4	48.0	848.0
70,0°	34.1	29.7	25.8	22.2	21.0	19.9	17.3	15.5	14.7	13.8	13.3	46.3	894.3
72,5°	30.6	27.0	23.4	16.9	12.4	11.0	9.2	7.4	6.3	5.8	5.6	42.4	936.8
75,0°	25.7	20.1	13.4	8.6	6.4	5.5	5.0	4.5	4.1	3.8	3.7	33.5	970.2
77,5°	14.2	9.2	6.7	5.4	4.9	4.5	4.1	3.8	3.3	3.0	2.9	19.7	989.9
80,0°	5.1	5.0	4.8	4.3	4.0	3.6	3.2	2.8	2.5	2.2	2.0	7.8	997.7
82,5°	3.0	3.1	3.2	3.2	3.0	2.8	2.4	2.0	1.7	1.5	1.4	1.8	999.5
85,0°	1.0	1.0	1.2	1.5	1.6	1.6	1.5	1.2	0.9	0.7	0.6	0.3	999.9
87,5°	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.1	0.1	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2J51Y08GE EAN: 4058352991404	LP number 59351_34
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	3480	22.3	23.0	22.6
95	241	252	3302	21.1	21.7	21.4
90	229	250	3137	20.0	20.6	20.3
85	216	248	2959	18.8	19.4	19.1
80	203	246	2781	17.6	18.2	17.9
75	190	243	2603	16.4	17.0	16.7
70	178	241	2439	15.4	15.8	15.6
65	165	238	2261	14.2	14.6	14.4
60	152	235	2083	13.1	13.4	13.2
55	140	232	1918	12.0	12.4	12.2
50	127	229	1740	10.9	11.2	11.0
45	114	225	1562	9.8	10.1	10.0
40	102	221	1397	8.8	9.1	9.0
35	89	216	1219	7.7	7.9	7.8
30	76	210	1041	6.6	6.8	6.7
25	63	203	863	5.5	5.7	5.6
20	51	195	699	4.6	4.7	4.6
17	44	190	603	4.0	4.0	4.0