




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14MN49XG EAN: 4058352940716	LP number 58683_344
	Version cover frosted, asymmetric distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 9470 lm Power consumption = 55.2 W Luminous efficacy = 171.6 lm/W	serial documentation 11.10.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 681 cd/klm**

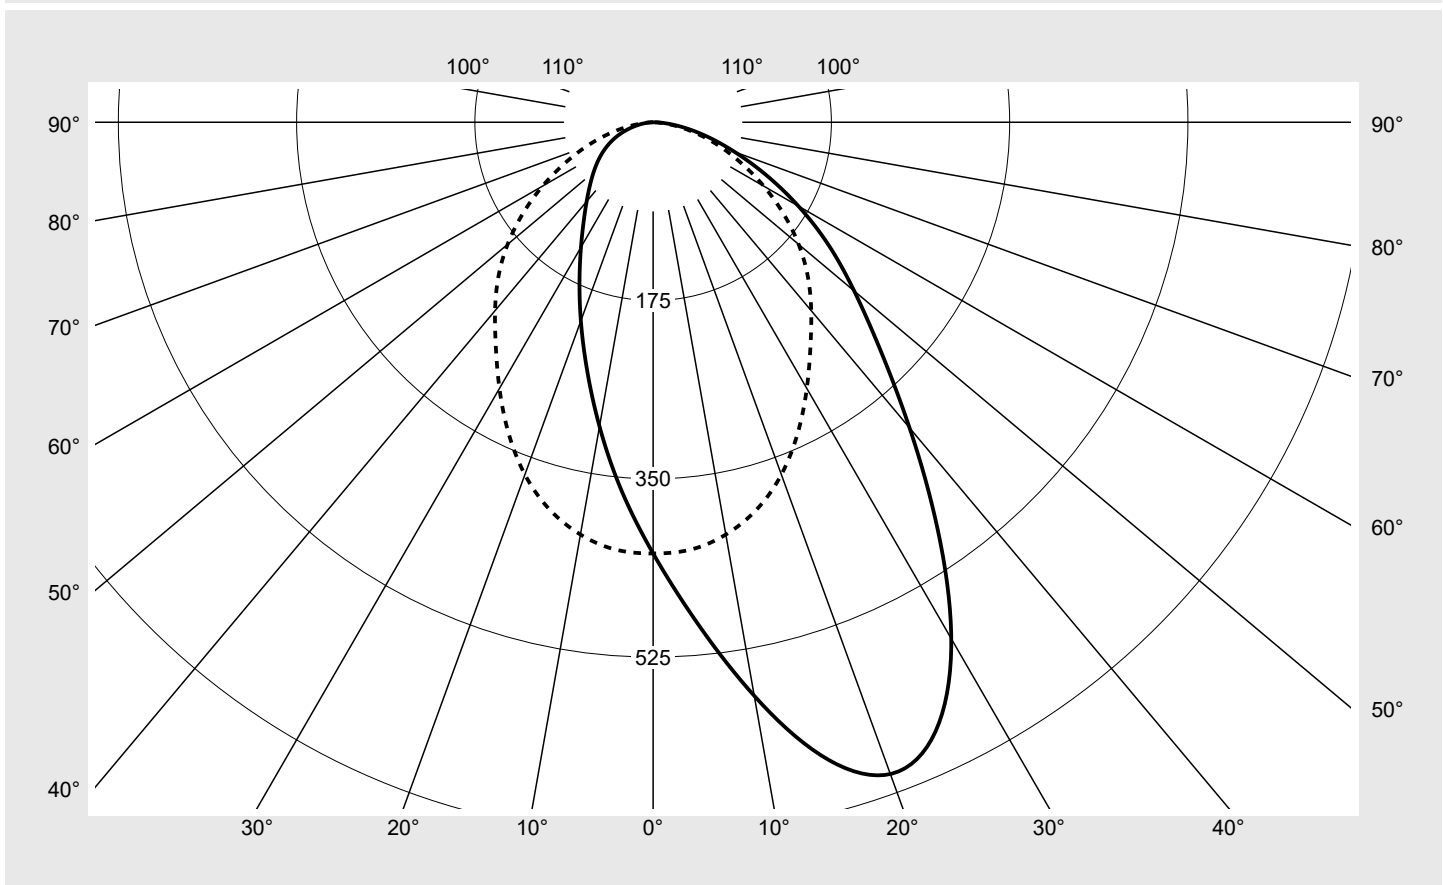

Classifications	
DIN 5040	A 4 0
CIE	N1=56 N2=84 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14MN49XG EAN: 4058352940716	LP number 58683_344
--	--	--------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14MN49XG EAN: 4058352940716	LP number 58683_344
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	26.2	27.8	26.6	28.1	28.4	24.8	26.4	25.2	26.7	27.0
	3H	27.2	28.6	27.6	28.9	29.3	25.9	27.4	26.3	27.7	28.1
	4H	27.5	28.9	27.9	29.2	29.6	26.3	27.7	26.7	28.0	28.4
	6H	27.8	29.0	28.2	29.4	29.8	26.6	27.8	27.0	28.2	28.6
	8H	27.9	29.1	28.3	29.4	29.8	26.7	27.9	27.1	28.2	28.6
	12H	28.0	29.0	28.4	29.4	29.9	26.8	27.8	27.2	28.2	28.6
4H	2H	27.0	28.3	27.3	28.6	29.0	25.4	26.8	25.8	27.1	27.5
	3H	28.1	29.2	28.5	29.6	30.0	26.8	28.0	27.2	28.3	28.8
	4H	28.5	29.5	29.0	30.0	30.4	27.4	28.4	27.8	28.8	29.2
	6H	28.9	29.7	29.3	30.2	30.6	27.7	28.6	28.2	29.1	29.5
	8H	29.0	29.8	29.4	30.2	30.7	27.9	28.7	28.3	29.1	29.6
	12H	29.1	29.8	29.5	30.2	30.7	27.9	28.6	28.4	29.1	29.6
8H	4H	28.9	29.7	29.3	30.1	30.6	27.6	28.4	28.1	28.9	29.3
	6H	29.3	30.0	29.8	30.4	30.9	28.1	28.8	28.6	29.3	29.8
	8H	29.4	30.0	29.9	30.5	31.0	28.3	28.9	28.8	29.4	29.9
	12H	29.6	30.1	30.1	30.6	31.1	28.4	28.9	28.9	29.4	29.9
12H	4H	28.9	29.6	29.4	30.1	30.6	27.6	28.4	28.1	28.8	29.3
	6H	29.4	29.9	29.9	30.4	30.9	28.2	28.7	28.7	29.2	29.8
	8H	29.6	30.0	30.1	30.5	31.1	28.4	28.9	28.9	29.4	29.9


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	48484.8	49361.0	52359.5	57422.2	59875.7	48173.2	33082.5	23297.9	17992.0	15079.0	13936.0	13596.1	13509.4
50°	43632.9	43922.1	46331.8	51793.9	56720.6	46578.2	31584.0	21784.3	16653.0	13998.1	13099.6	12909.9	12922.8
55°	39920.0	39667.9	41708.4	46869.5	52462.6	43736.9	29597.9	20332.1	15633.1	13226.8	12511.3	12432.2	12532.9
60°	35853.4	35536.9	37533.2	42365.9	47529.2	39984.1	27289.5	18933.3	14798.5	12683.7	12048.9	12053.0	12199.1
65°	31471.5	31308.8	33475.1	38036.3	42516.1	35869.9	24757.2	17666.2	14177.0	12279.0	11673.2	11691.0	11832.9
70°	27108.9	27288.1	29413.7	33936.5	37640.0	31863.3	22340.4	16416.7	13488.1	11849.7	11155.3	11199.5	11251.7
75°	23433.5	23593.4	25638.6	29894.7	32759.2	27724.2	19574.0	14850.2	12552.2	11126.5	10285.8	10261.8	10288.3
80°	19838.4	20012.7	22173.4	25281.9	27176.9	22748.2	16127.5	12670.4	11037.5	9768.8	9114.3	9051.0	9102.4
85°	16350.9	16168.5	18183.0	20561.0	20213.8	16453.3	11406.4	9755.3	8902.3	8309.1	7804.5	7764.5	7835.7

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14MN49XG EAN: 4058352940716	LP number 58683_344
--	--	--------------------------------------

Luminance values in cd/m²
γ 65°
γ 70°
γ 75°
γ 80°
γ 85°
siteco

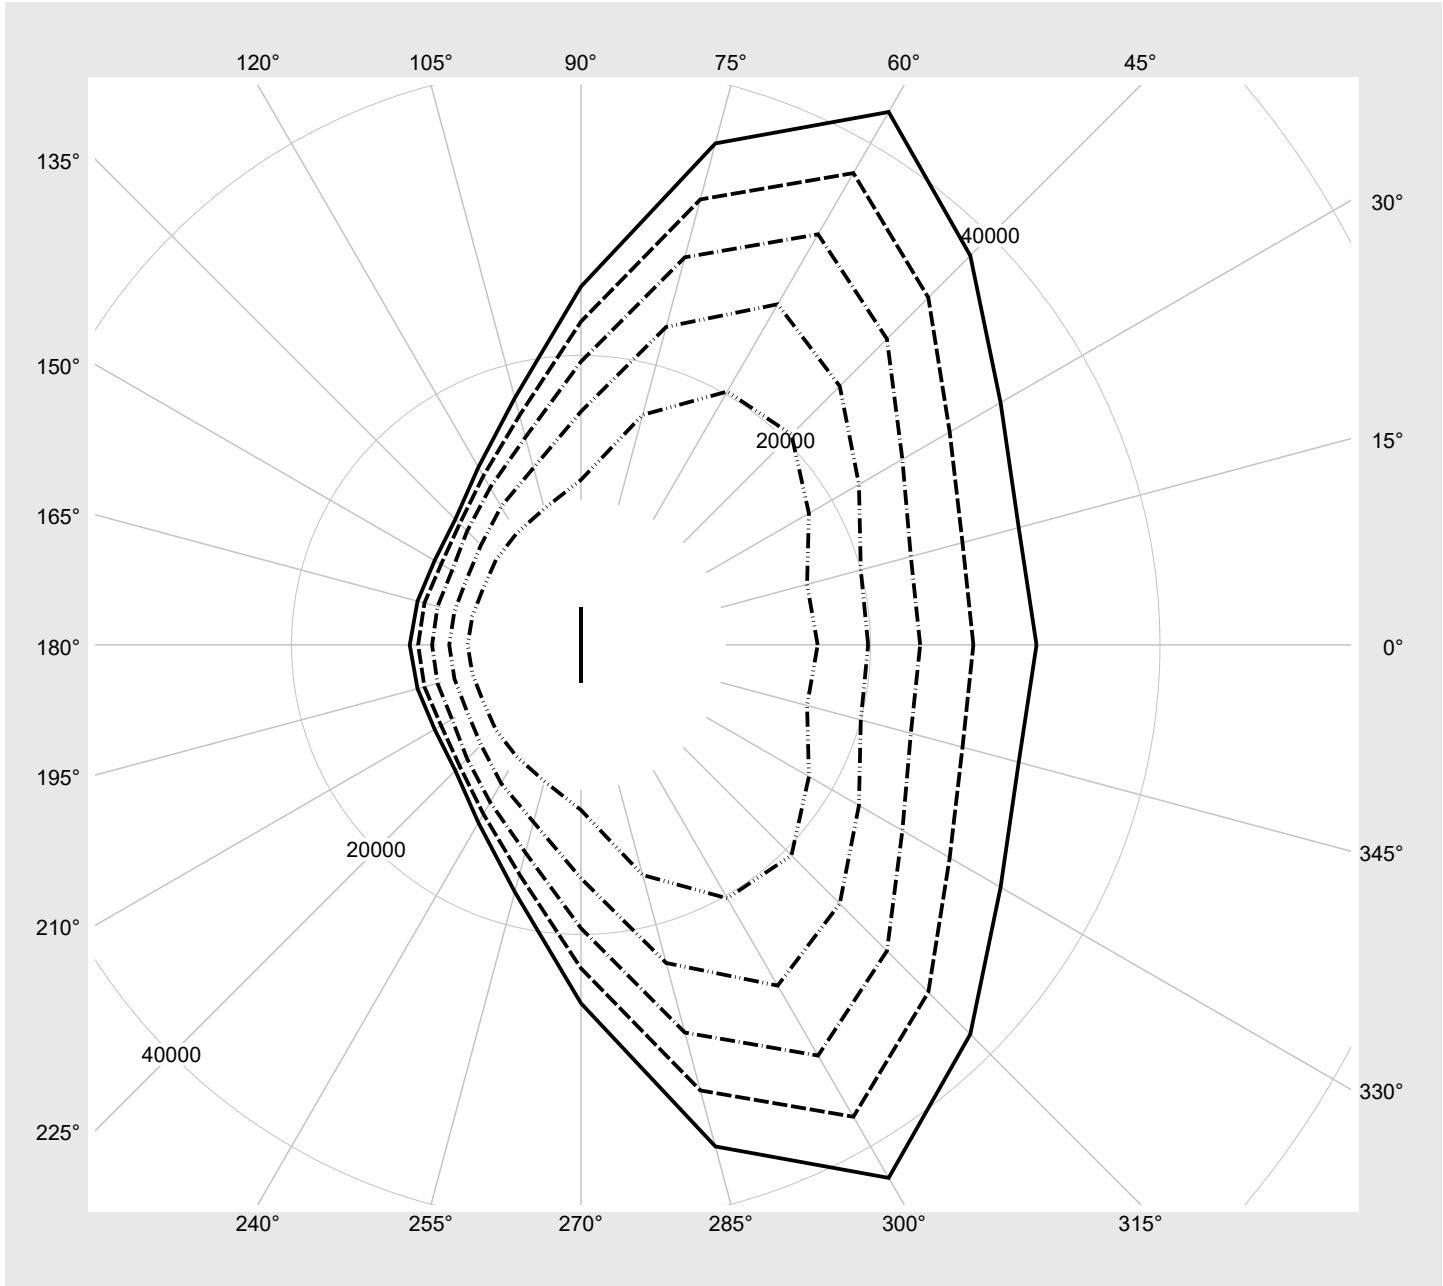

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL14MN49XG
EAN: 4058352940716

LP number
58683_344

Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	9470	55.2
2	A	C	F	9060	52.5
3	A	D	E	8570	49.3
4	A	D	F	8080	46.2
5	B	C	E	7370	41.7
6	B	C	F	7150	40.4
7	B	D	E	6650	37.4
8	B	D	F	6210	34.8