
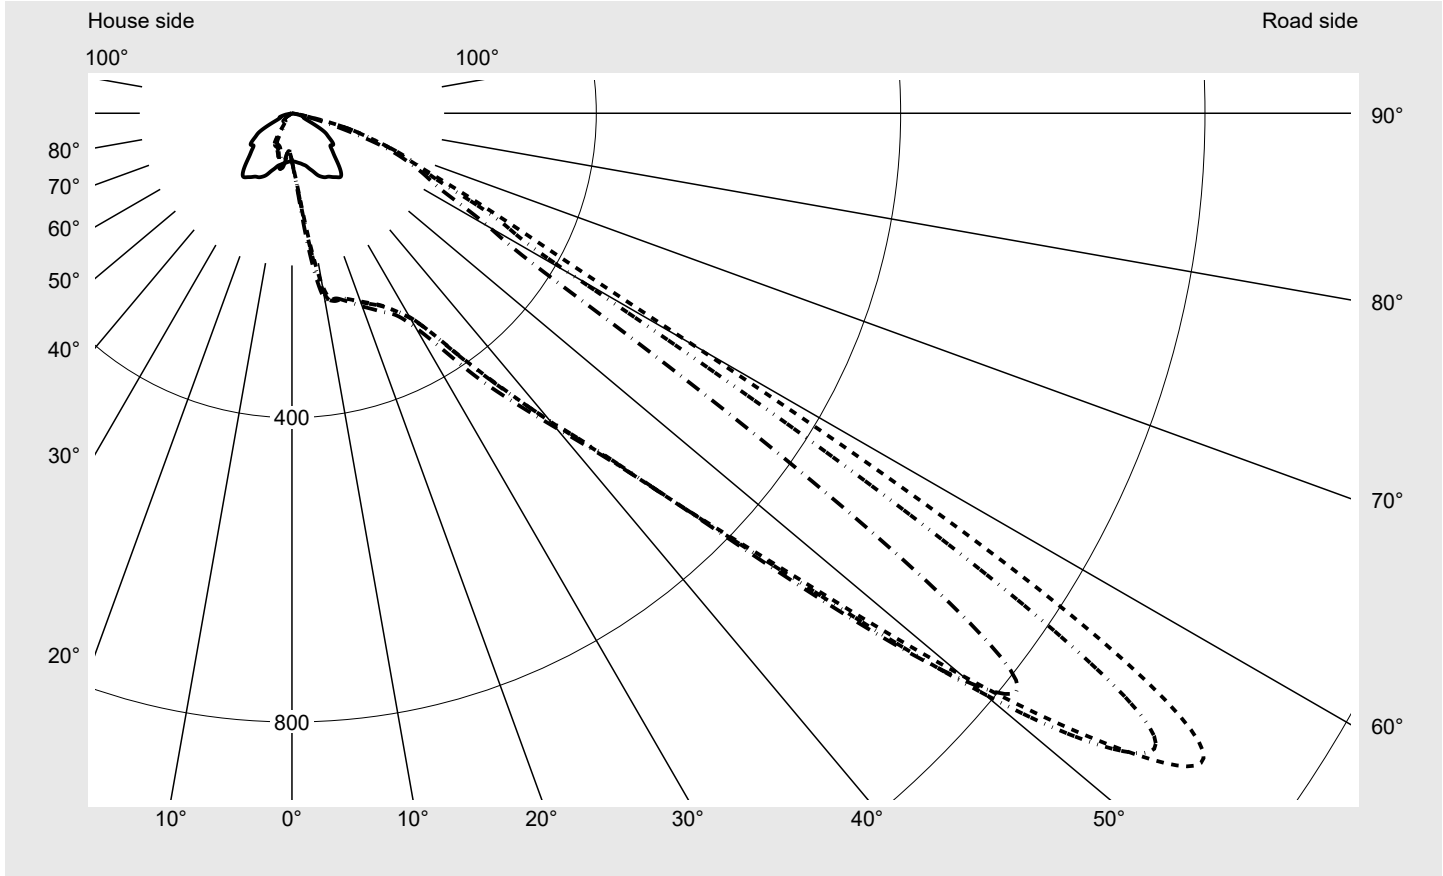


Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
	Version standard bracket Optic asymmetric distribution PL64 with Back Light Control Cover toughened safety glass Lamps LED 5700 K CRI ≥ 80 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 85290 lm Power consumption = 1016.4 W Luminous efficacy = 83.9 lm/W	serial documentation 30.10.2023



Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1462 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	145.7
Imax 80°	16.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

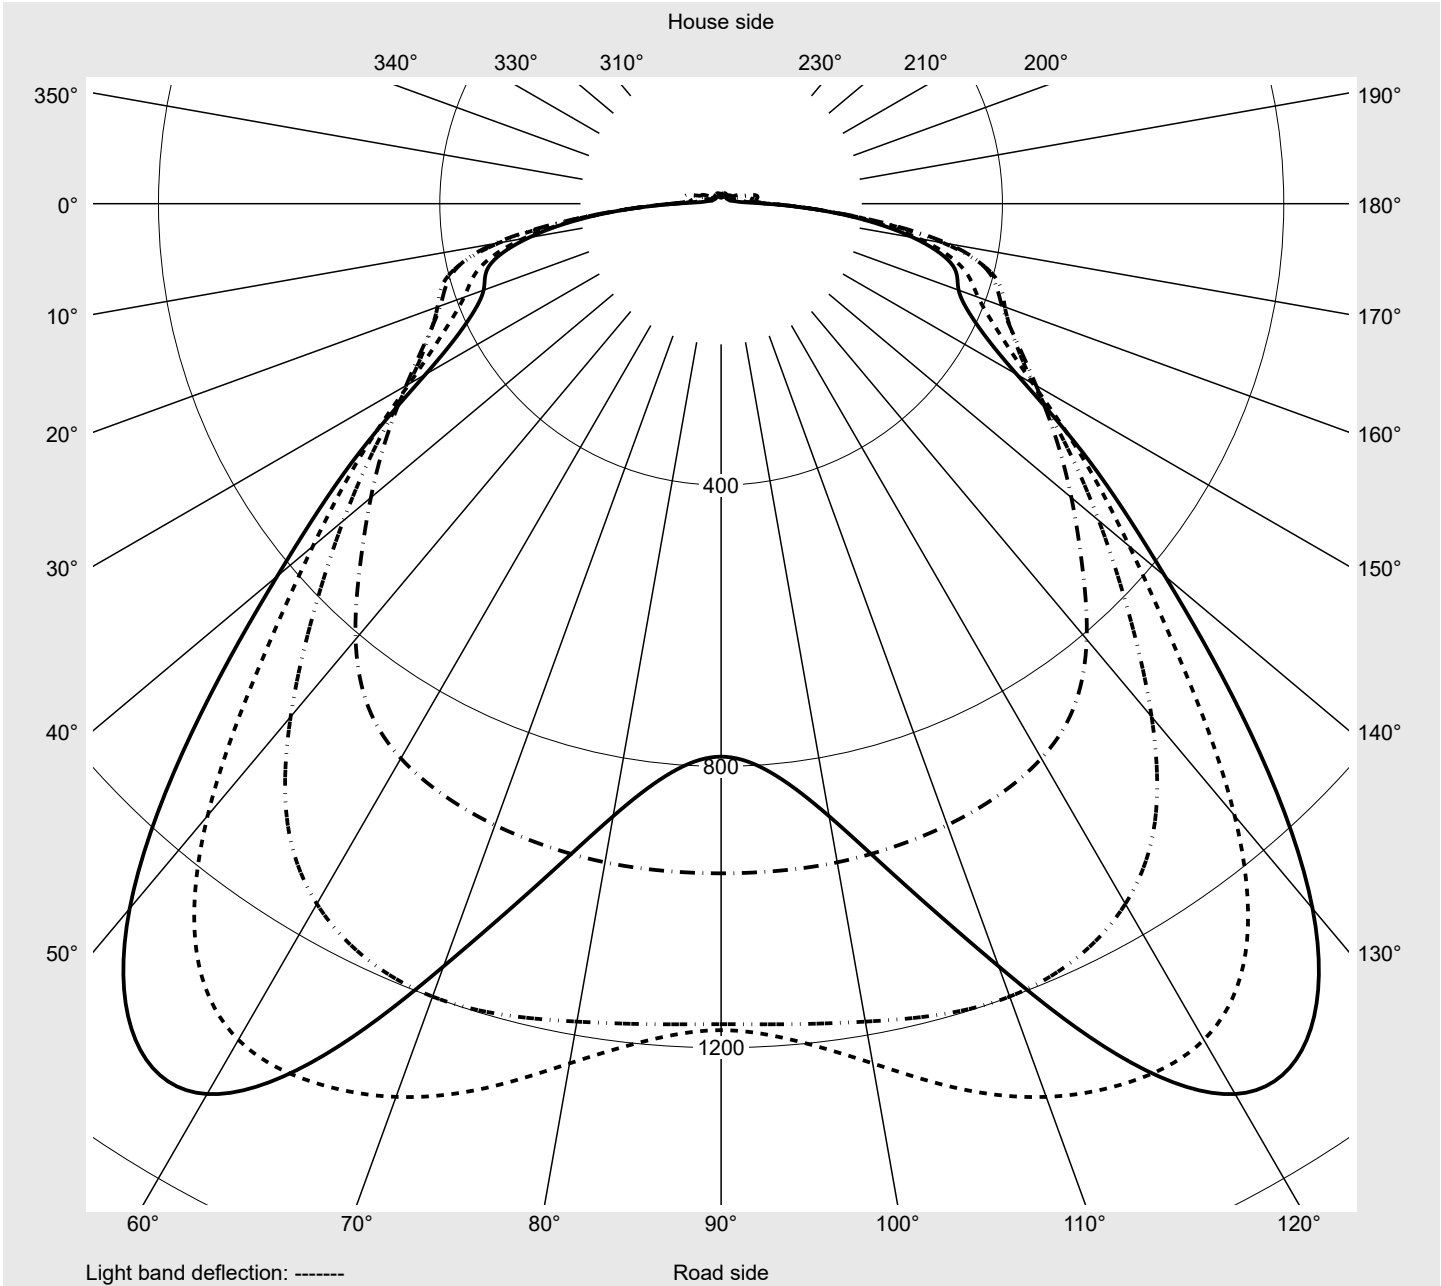

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	63.4	64.7	66.1	67.6	69.2	70.8	72.3	73.7	75.1	76.3	77.4	78.2	79.1
5,0°	64.4	67.5	71.0	74.6	78.0	81.5	84.9	88.4	92.1	95.9	99.7	103.4	106.9
7,5°	65.7	70.6	76.4	81.9	87.5	93.9	101.5	110.2	120.0	130.7	141.9	152.8	163.0
10,0°	67.1	74.4	82.2	90.0	99.5	111.7	126.9	145.4	165.5	184.9	203.0	217.9	229.6
12,5°	69.2	79.1	89.2	101.1	117.5	139.6	166.3	194.5	219.9	238.4	248.9	252.3	252.6
15,0°	71.6	84.3	97.4	115.2	140.8	174.2	209.2	237.6	252.0	255.5	255.0	253.8	252.6
17,5°	76.3	91.9	109.1	135.3	172.4	213.9	246.0	259.0	260.5	259.6	258.2	257.2	256.7
20,0°	81.3	100.8	123.0	158.6	204.9	242.6	264.2	267.8	267.6	266.1	264.6	263.5	263.1
22,5°	87.8	111.1	139.8	186.4	237.8	267.8	276.0	278.3	277.5	275.7	273.0	271.0	270.2
25,0°	92.0	119.6	155.9	212.2	260.8	280.4	287.7	290.0	288.6	285.6	282.2	279.6	278.9
27,5°	94.8	126.2	171.7	236.0	277.2	293.0	301.4	303.6	302.1	299.1	295.4	293.5	292.4
30,0°	96.2	131.3	186.7	254.7	290.3	307.3	316.7	320.1	320.4	319.0	317.3	314.6	311.1
32,5°	99.4	139.7	207.1	277.4	308.5	325.2	335.4	340.9	345.4	348.8	348.3	344.4	343.0
35,0°	102.6	149.9	230.4	304.3	334.9	349.4	360.5	370.6	382.5	390.5	393.1	394.8	395.5
37,5°	105.1	161.5	257.0	334.9	367.0	381.3	392.1	408.3	427.3	440.7	451.1	455.5	456.8
40,0°	99.8	167.8	277.2	362.6	398.3	419.7	432.6	454.6	478.5	502.5	521.2	529.1	529.8
42,5°	89.4	170.7	290.4	376.4	420.6	454.2	477.0	502.3	533.6	568.4	599.5	613.8	615.2
45,0°	78.9	171.8	302.0	379.0	421.5	466.2	509.3	549.4	592.6	643.1	695.4	730.2	741.9
47,5°	71.3	179.8	327.6	398.3	424.9	463.7	517.2	581.2	650.1	725.8	808.6	874.3	910.6
50,0°	66.0	177.9	320.8	403.3	429.3	460.9	513.1	598.8	701.2	818.3	952.3	1075.0	1149.6
52,5°	68.2	173.6	285.7	356.2	389.0	436.7	512.1	625.8	757.8	927.2	1135.9	1300.1	1372.7
55,0°	63.8	171.7	277.4	341.3	359.4	398.9	485.5	640.4	823.9	1065.1	1308.3	1451.5	1461.7
57,5°	56.4	165.5	287.4	358.5	372.9	400.0	478.2	656.4	910.6	1157.5	1355.9	1390.9	1162.0
60,0°	50.0	159.1	294.5	369.0	389.3	428.2	505.7	715.4	965.5	1129.2	1110.8	895.4	607.0
62,5°	37.2	116.8	214.6	286.0	331.4	405.9	552.2	792.3	940.0	804.5	543.0	404.8	355.6
65,0°	24.3	56.9	106.1	158.9	208.1	296.4	467.2	650.4	578.4	314.3	241.2	256.4	245.5
67,5°	17.8	31.0	54.3	91.0	123.8	172.8	263.2	257.0	153.3	133.3	138.1	159.6	177.5
70,0°	16.3	23.3	30.8	46.1	60.5	69.6	73.4	54.9	69.3	68.4	84.2	121.4	141.6
72,5°	16.9	21.9	24.2	29.5	33.8	34.0	30.6	31.7	33.6	45.8	59.8	89.4	105.9
75,0°	13.4	18.6	20.3	24.0	23.3	23.4	23.1	18.8	23.6	34.4	41.2	59.0	72.3
77,5°	9.1	12.9	14.2	17.8	19.0	20.4	18.4	15.9	16.6	24.3	27.4	31.7	31.7
80,0°	5.3	7.9	10.4	12.9	15.6	16.4	15.8	13.3	10.9	11.6	8.1	7.6	8.5
82,5°	2.9	4.9	7.4	9.6	12.2	13.5	11.8	9.9	6.8	4.5	3.9	4.0	4.1
85,0°	1.5	2.5	4.2	5.9	6.7	7.3	6.1	4.3	2.7	2.1	1.8	1.8	1.9
87,5°	0.7	0.9	1.2	1.4	1.4	1.1	0.9	0.8	0.7	0.7	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	79.7	80.2	80.6	81.0	81.6	81.7	62.1	60.9	59.8	59.0	58.1	57.3	56.6
5,0°	110.0	112.9	115.1	117.2	118.9	119.4	61.5	59.3	57.3	55.7	54.4	53.4	52.6
7,5°	171.7	179.1	184.9	189.4	192.4	193.4	61.3	58.0	55.5	53.7	52.5	51.7	51.2
10,0°	237.6	242.7	245.4	246.9	247.6	248.2	61.2	56.9	54.1	52.5	51.7	51.9	53.4
12,5°	251.8	251.1	250.6	250.2	250.0	250.3	61.2	56.1	53.3	52.2	53.1	57.2	64.0
15,0°	252.2	252.2	252.5	252.9	253.1	253.7	61.5	55.6	53.1	53.9	59.8	68.9	75.7
17,5°	257.2	258.1	259.1	259.9	260.7	261.3	63.2	56.5	54.9	60.1	71.4	79.5	82.6
20,0°	264.2	265.7	267.2	268.6	269.5	270.1	65.4	58.3	59.2	71.4	81.7	86.0	81.1
22,5°	271.4	273.9	276.0	277.5	278.4	278.9	68.3	61.1	67.0	82.8	90.4	85.8	77.7
25,0°	279.8	282.7	285.4	287.1	288.2	288.6	69.9	64.1	78.9	92.7	94.3	83.9	73.8
27,5°	292.4	293.8	296.1	298.3	299.5	300.2	70.6	67.3	90.5	101.2	95.4	82.0	69.0
30,0°	309.4	311.8	316.7	321.4	324.3	325.7	71.6	72.8	99.5	105.5	94.2	77.4	63.9
32,5°	343.6	347.7	354.2	360.9	365.5	367.3	74.4	79.7	103.8	103.4	90.0	71.8	60.1
35,0°	397.2	401.5	408.3	415.6	421.1	423.2	76.8	87.3	103.6	98.0	83.9	67.8	57.8
37,5°	458.6	460.7	465.4	471.6	476.4	478.5	76.9	87.8	98.3	92.9	82.0	68.9	57.0
40,0°	528.0	528.2	530.0	533.8	537.7	539.5	72.2	82.0	89.2	88.4	82.0	71.0	51.7
42,5°	611.5	609.4	609.9	613.1	616.6	618.5	64.1	70.0	71.9	73.5	74.3	64.9	39.5
45,0°	743.1	741.9	741.6	744.2	746.4	746.1	55.6	57.5	51.3	46.6	48.1	40.8	26.9
47,5°	929.3	940.3	946.8	950.9	952.0	952.1	49.6	52.6	47.8	33.1	29.7	23.0	18.5
50,0°	1186.8	1199.7	1193.9	1180.9	1171.0	1166.6	43.0	45.2	43.8	27.1	20.4	14.7	14.0
52,5°	1377.4	1351.4	1302.2	1241.2	1194.2	1175.1	34.5	30.7	24.5	19.0	15.3	12.7	12.1
55,0°	1335.8	1154.0	1000.3	884.4	811.9	786.2	27.7	20.2	15.6	13.2	12.9	11.5	11.1
57,5°	856.0	629.6	507.8	449.5	423.5	415.0	25.0	17.2	13.2	11.6	11.3	11.0	10.5
60,0°	425.3	369.0	340.9	319.6	305.0	299.2	21.1	15.1	12.0	11.1	10.6	10.6	10.0
62,5°	310.9	275.1	252.5	237.6	230.7	228.5	16.7	12.2	10.4	9.8	9.3	9.0	8.7
65,0°	219.7	206.4	201.0	199.3	195.9	193.2	13.3	10.0	8.6	8.2	7.4	7.0	6.7
67,5°	179.9	174.3	169.7	168.9	165.6	163.0	10.9	8.9	7.8	7.2	6.3	5.7	5.5
70,0°	145.7	142.7	140.2	139.8	131.6	126.6	9.4	7.7	6.9	6.1	5.4	5.1	4.9
72,5°	106.5	102.6	94.0	86.1	78.6	74.7	8.5	6.9	5.7	4.8	4.5	4.4	4.3
75,0°	73.0	61.6	50.5	44.8	39.9	37.4	7.2	5.7	4.4	3.9	3.8	3.8	3.8
77,5°	26.2	19.7	16.1	14.7	13.9	13.5	5.5	4.3	3.3	3.1	3.1	3.1	3.1
80,0°	8.9	8.9	7.9	7.5	7.3	7.3	3.4	2.7	2.4	2.4	2.4	2.4	2.5
82,5°	4.5	4.8	4.6	4.5	4.4	4.3	2.1	1.9	1.8	1.8	1.9	1.9	1.9
85,0°	2.1	2.0	1.8	1.7	1.6	1.6	1.3	1.2	1.3	1.3	1.4	1.4	1.4
87,5°	0.7	0.7	0.7	0.6	0.6	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	0.1	0.1
2,5°	55.9	55.3	54.6	54.1	53.7	53.3	53.0	52.7	52.5	52.2	52.1	0.8	0.9
5,0°	51.8	51.3	50.7	50.4	50.1	49.9	49.8	49.7	49.7	49.5	49.5	1.8	2.6
7,5°	51.1	51.5	52.4	53.8	55.4	57.0	58.5	59.7	60.5	60.9	61.0	3.4	6.0
10,0°	56.6	60.9	65.0	68.2	70.5	72.2	72.9	73.1	73.2	73.1	72.9	5.6	11.6
12,5°	69.9	74.3	76.5	76.5	74.7	72.8	70.9	69.3	68.0	67.1	66.7	7.7	19.4
15,0°	79.5	78.6	75.4	71.9	68.4	65.1	62.3	60.1	58.5	57.4	56.9	9.7	29.1
17,5°	79.2	74.4	69.4	64.6	60.3	56.9	54.4	52.6	51.3	50.4	50.1	11.7	40.8
20,0°	75.0	68.8	62.9	58.1	54.7	52.2	50.2	48.7	47.7	47.0	46.8	13.9	54.7
22,5°	69.9	62.8	57.6	54.0	51.4	49.5	48.1	47.0	46.2	45.6	45.4	16.2	70.9
25,0°	64.4	58.1	54.0	51.3	49.7	48.5	47.5	46.6	45.7	45.1	44.8	18.6	89.5
27,5°	60.3	55.0	51.7	49.8	48.7	47.9	46.6	45.1	43.7	42.7	42.3	21.1	110.6
30,0°	57.0	52.8	50.1	47.9	45.6	42.8	39.3	35.6	32.2	29.8	29.0	23.9	134.4
32,5°	54.2	50.4	45.9	40.5	34.3	27.8	21.9	18.5	17.0	16.6	16.5	27.2	161.6
35,0°	50.1	42.2	33.7	25.9	19.5	16.9	16.0	15.5	15.2	15.1	15.1	31.7	193.2
37,5°	42.2	30.1	22.1	18.2	16.5	15.4	14.7	14.3	14.1	14.0	14.0	37.0	230.2
40,0°	31.0	21.8	18.4	16.6	15.2	14.2	13.6	13.4	13.3	13.3	13.3	43.1	273.4
42,5°	24.7	20.1	17.1	15.3	14.4	13.8	13.4	13.4	13.4	13.5	13.6	49.9	323.3
45,0°	21.6	18.6	16.2	14.8	14.2	14.2	14.1	14.3	14.5	14.6	14.6	58.5	381.8
47,5°	17.9	16.9	15.7	14.7	14.6	15.0	15.2	15.4	15.5	15.5	15.5	70.4	452.3
50,0°	13.9	14.0	14.1	14.5	15.1	15.6	15.8	15.4	14.8	14.4	14.2	84.8	537.1
52,5°	11.8	11.8	12.3	13.2	14.0	14.4	14.0	13.0	12.0	11.3	11.0	94.7	631.8
55,0°	10.7	10.7	10.8	11.0	11.2	11.0	10.5	9.7	9.1	8.6	8.4	91.4	723.2
57,5°	9.9	9.4	9.0	8.6	8.3	8.0	7.7	7.4	7.3	7.1	7.1	77.1	800.3
60,0°	9.1	8.2	7.4	6.9	6.7	6.5	6.3	6.2	6.3	6.4	6.4	63.9	864.2
62,5°	7.8	6.9	6.3	5.9	5.9	5.7	5.6	5.5	5.5	5.6	5.6	49.6	913.8
65,0°	6.2	5.5	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.9	4.9	33.4	947.2
67,5°	5.0	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.4	4.3	19.8	967.0
70,0°	4.6	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.1	4.0	4.0	12.3	979.3
72,5°	4.2	4.1	4.1	4.0	4.0	4.0	3.9	3.9	3.8	3.7	3.7	8.3	987.6
75,0°	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	5.5	993.1
77,5°	3.1	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.7	2.7	2.7	3.1	996.2
80,0°	2.5	2.5	2.5	2.4	2.4	2.4	2.3	2.2	2.2	2.1	2.1	1.7	998.0
82,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.2	999.1
85,0°	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	0.6	999.7
87,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	84791	1008.6
95	237	251	80915	948.4
90	222	249	76871	888.5
85	206	246	72453	824.6
80	192	244	68307	769.0
75	177	241	63812	709.7
70	163	238	59560	654.4
65	150	235	55496	603.8
60	137	231	51307	553.0
55	124	228	47021	502.5
50	111	224	42556	452.2
45	99	219	38385	405.9
40	87	215	34046	359.7
35	75	209	29680	314.0
30	64	204	25494	272.5
25	53	197	21237	230.9
20	42	188	16989	190.4
15	31	177	12704	143.0
10	21	163	8678	102.4
5	10	136	4200	55.3
1	3	91	1169	27.6

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
79	188	243	65475	747.6
75	175	240	61683	696.7
70	161	237	57631	642.1
65	148	234	53739	591.2
60	134	231	49350	536.9
55	122	227	45457	490.7
50	109	223	41180	440.9
45	97	219	37087	394.8
40	85	214	32866	349.0
35	74	209	28964	307.5
30	63	203	24803	266.4
25	52	196	20651	225.1
20	41	187	16469	184.9
15	30	176	12219	137.1
10	20	161	8225	97.6
5	10	136	4184	54.8
1	3	92	1166	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779118W01AA EAN: 4058352985939	LP number 59473_10
----------------------------------	--	------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	85290.0	1016.4
25.0	65830.0	752.9