
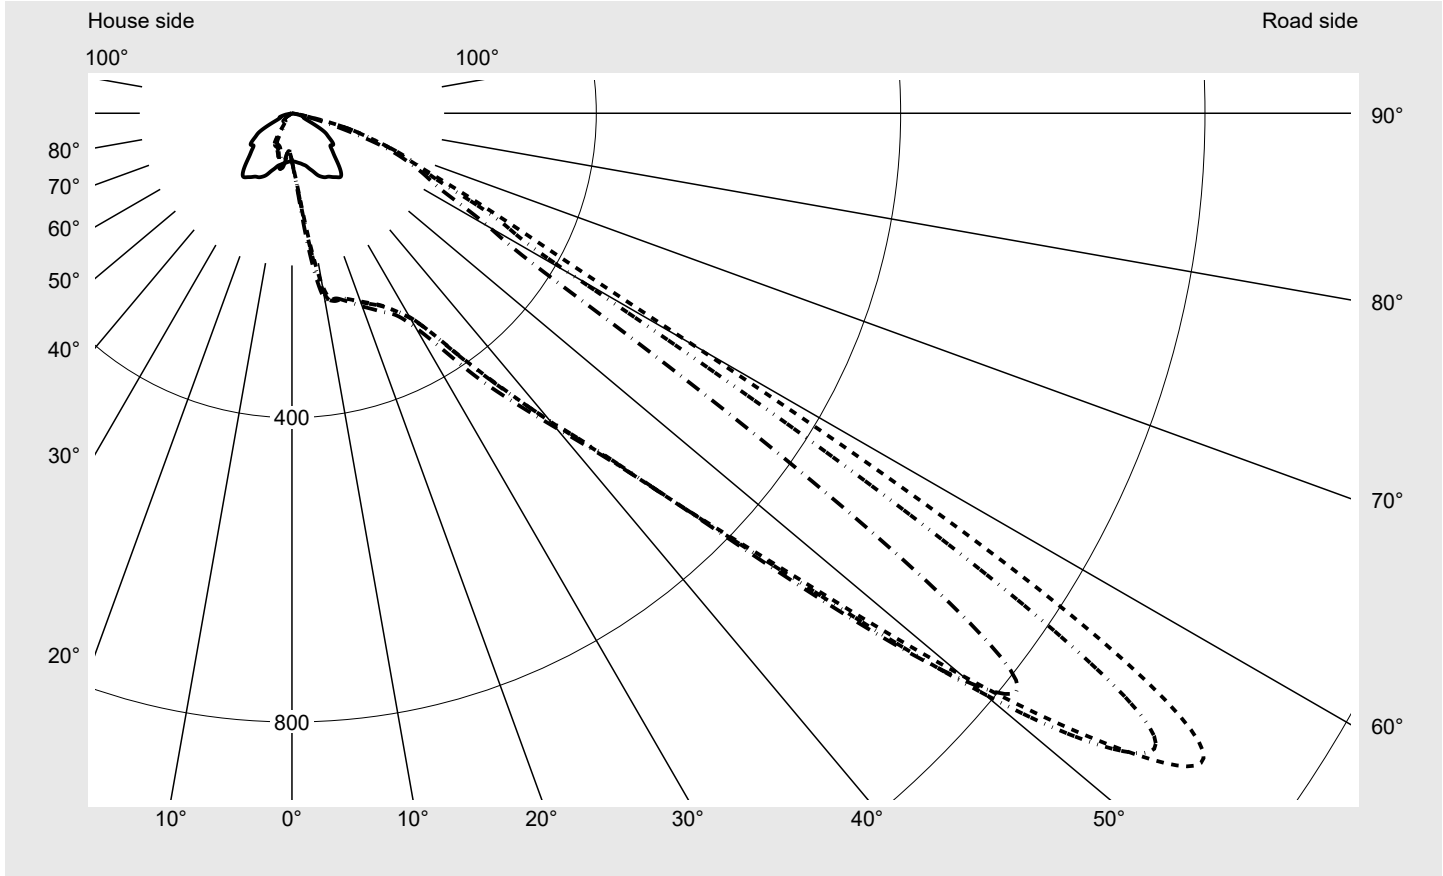


Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
	Version standard bracket Optic asymmetric distribution PL64 with Back Light Control Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 73350 lm Power consumption = 1016.3 W Luminous efficacy = 72.2 lm/W	serial documentation 30.10.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1462 cd/klm



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	145.7
Imax 80°	16.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
----------------------------------	--	-----------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

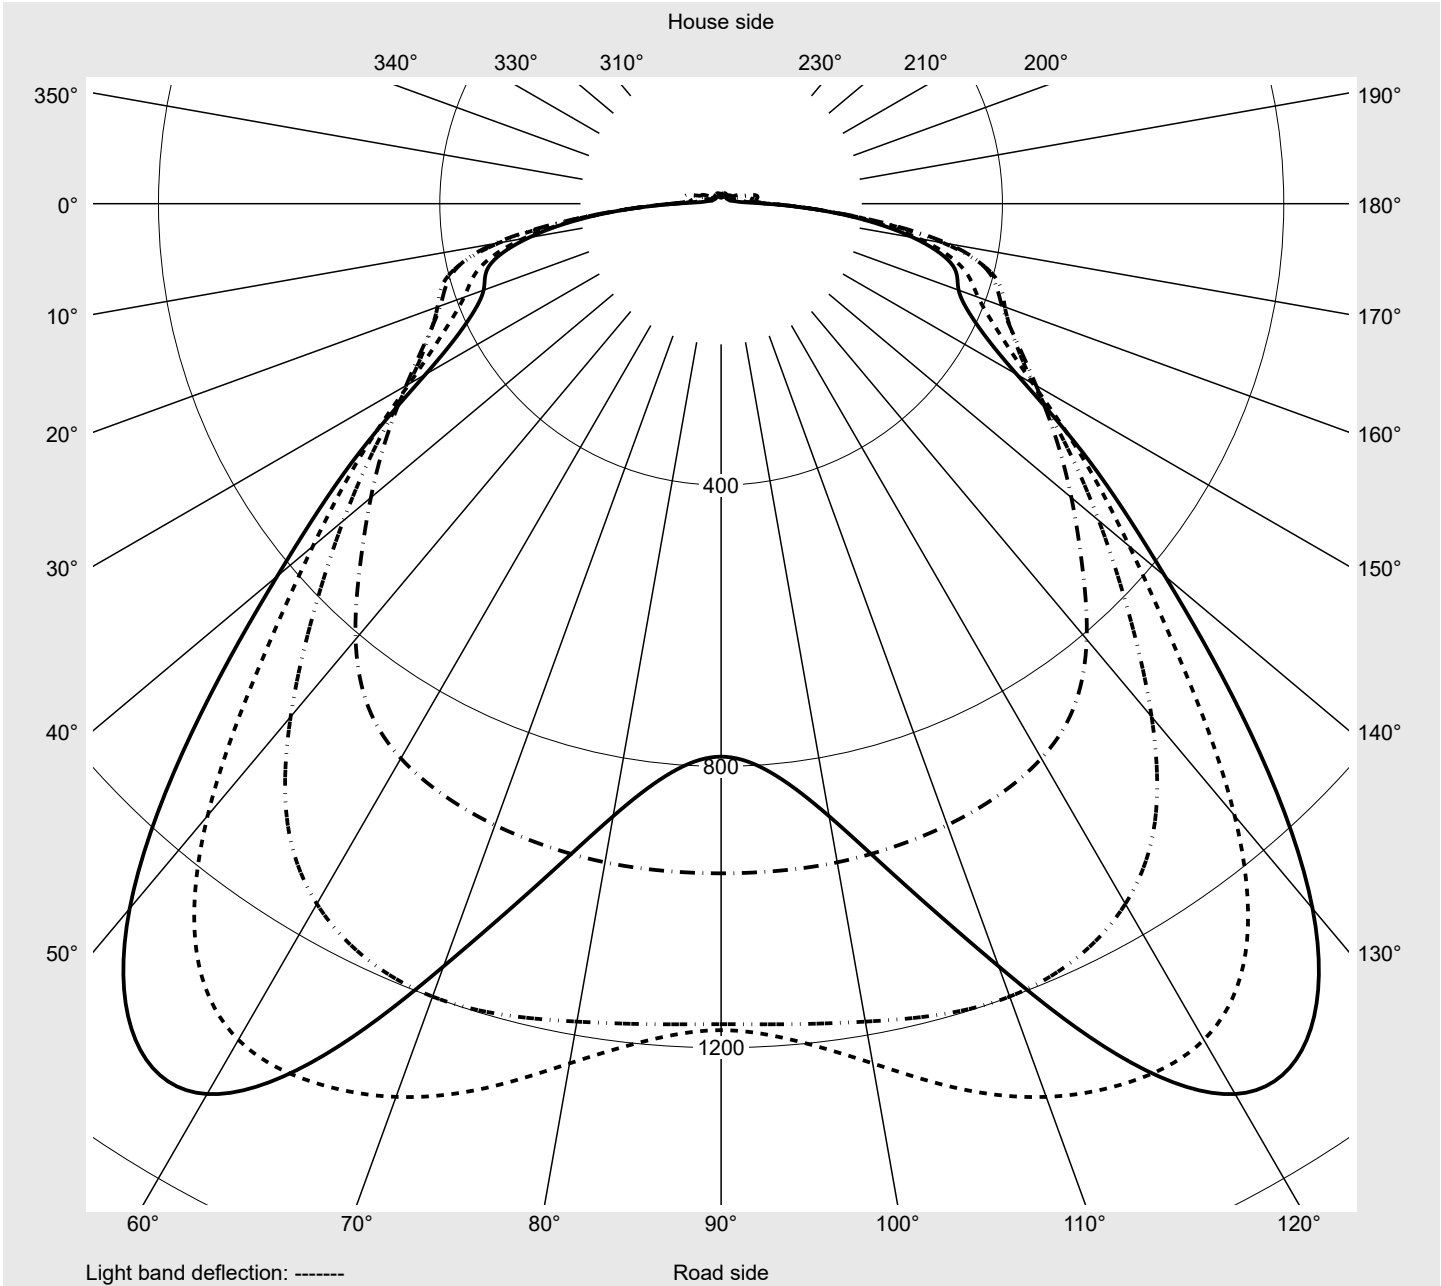

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	63.4	64.7	66.1	67.6	69.2	70.8	72.3	73.7	75.1	76.3	77.4	78.2	79.1
5,0°	64.4	67.5	71.0	74.6	78.0	81.5	84.9	88.4	92.1	95.9	99.7	103.4	106.9
7,5°	65.7	70.6	76.4	81.9	87.5	93.9	101.5	110.2	120.0	130.7	141.9	152.8	163.0
10,0°	67.1	74.4	82.2	90.0	99.5	111.7	126.9	145.4	165.5	184.9	203.0	217.9	229.6
12,5°	69.2	79.1	89.2	101.1	117.5	139.6	166.3	194.5	219.9	238.4	248.9	252.3	252.6
15,0°	71.6	84.3	97.4	115.2	140.8	174.2	209.2	237.6	252.0	255.5	255.0	253.8	252.6
17,5°	76.3	91.9	109.1	135.3	172.4	213.9	246.0	259.0	260.5	259.6	258.2	257.2	256.7
20,0°	81.3	100.8	123.0	158.6	204.9	242.6	264.2	267.8	267.6	266.1	264.6	263.5	263.1
22,5°	87.8	111.1	139.8	186.4	237.8	267.8	276.0	278.3	277.5	275.7	273.0	271.0	270.2
25,0°	92.0	119.6	155.9	212.2	260.8	280.4	287.7	290.0	288.6	285.6	282.2	279.6	278.9
27,5°	94.8	126.2	171.7	236.0	277.2	293.0	301.4	303.6	302.1	299.1	295.4	293.5	292.4
30,0°	96.2	131.3	186.7	254.7	290.3	307.3	316.7	320.1	320.4	319.0	317.3	314.6	311.1
32,5°	99.4	139.7	207.1	277.4	308.5	325.2	335.4	340.9	345.4	348.8	348.3	344.4	343.0
35,0°	102.6	149.9	230.4	304.3	334.9	349.4	360.5	370.6	382.5	390.5	393.1	394.8	395.5
37,5°	105.1	161.5	257.0	334.9	367.0	381.3	392.1	408.3	427.3	440.7	451.1	455.5	456.8
40,0°	99.8	167.8	277.2	362.6	398.3	419.7	432.6	454.6	478.5	502.5	521.2	529.1	529.8
42,5°	89.4	170.7	290.4	376.4	420.6	454.2	477.0	502.3	533.6	568.4	599.5	613.8	615.2
45,0°	78.9	171.8	302.0	379.0	421.5	466.2	509.3	549.4	592.6	643.1	695.4	730.2	741.9
47,5°	71.3	179.8	327.6	398.3	424.9	463.7	517.2	581.2	650.1	725.8	808.6	874.3	910.6
50,0°	66.0	177.9	320.8	403.3	429.3	460.9	513.1	598.8	701.2	818.3	952.3	1075.0	1149.6
52,5°	68.2	173.6	285.7	356.2	389.0	436.7	512.1	625.8	757.8	927.2	1135.9	1300.1	1372.7
55,0°	63.8	171.7	277.4	341.3	359.4	398.9	485.5	640.4	823.9	1065.1	1308.3	1451.5	1461.7
57,5°	56.4	165.5	287.4	358.5	372.9	400.0	478.2	656.4	910.6	1157.5	1355.9	1390.9	1162.0
60,0°	50.0	159.1	294.5	369.0	389.3	428.2	505.7	715.4	965.5	1129.2	1110.8	895.4	607.0
62,5°	37.2	116.8	214.6	286.0	331.4	405.9	552.2	792.3	940.0	804.5	543.0	404.8	355.6
65,0°	24.3	56.9	106.1	158.9	208.1	296.4	467.2	650.4	578.4	314.3	241.2	256.4	245.5
67,5°	17.8	31.0	54.3	91.0	123.8	172.8	263.2	257.0	153.3	133.3	138.1	159.6	177.5
70,0°	16.3	23.3	30.8	46.1	60.5	69.6	73.4	54.9	69.3	68.4	84.2	121.4	141.6
72,5°	16.9	21.9	24.2	29.5	33.8	34.0	30.6	31.7	33.6	45.8	59.8	89.4	105.9
75,0°	13.4	18.6	20.3	24.0	23.3	23.4	23.1	18.8	23.6	34.4	41.2	59.0	72.3
77,5°	9.1	12.9	14.2	17.8	19.0	20.4	18.4	15.9	16.6	24.3	27.4	31.7	31.7
80,0°	5.3	7.9	10.4	12.9	15.6	16.4	15.8	13.3	10.9	11.6	8.1	7.6	8.5
82,5°	2.9	4.9	7.4	9.6	12.2	13.5	11.8	9.9	6.8	4.5	3.9	4.0	4.1
85,0°	1.5	2.5	4.2	5.9	6.7	7.3	6.1	4.3	2.7	2.1	1.8	1.8	1.9
87,5°	0.7	0.9	1.2	1.4	1.4	1.1	0.9	0.8	0.7	0.7	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	79.7	80.2	80.6	81.0	81.6	81.7	62.1	60.9	59.8	59.0	58.1	57.3	56.6
5,0°	110.0	112.9	115.1	117.2	118.9	119.4	61.5	59.3	57.3	55.7	54.4	53.4	52.6
7,5°	171.7	179.1	184.9	189.4	192.4	193.4	61.3	58.0	55.5	53.7	52.5	51.7	51.2
10,0°	237.6	242.7	245.4	246.9	247.6	248.2	61.2	56.9	54.1	52.5	51.7	51.9	53.4
12,5°	251.8	251.1	250.6	250.2	250.0	250.3	61.2	56.1	53.3	52.2	53.1	57.2	64.0
15,0°	252.2	252.2	252.5	252.9	253.1	253.7	61.5	55.6	53.1	53.9	59.8	68.9	75.7
17,5°	257.2	258.1	259.1	259.9	260.7	261.3	63.2	56.5	54.9	60.1	71.4	79.5	82.6
20,0°	264.2	265.7	267.2	268.6	269.5	270.1	65.4	58.3	59.2	71.4	81.7	86.0	81.1
22,5°	271.4	273.9	276.0	277.5	278.4	278.9	68.3	61.1	67.0	82.8	90.4	85.8	77.7
25,0°	279.8	282.7	285.4	287.1	288.2	288.6	69.9	64.1	78.9	92.7	94.3	83.9	73.8
27,5°	292.4	293.8	296.1	298.3	299.5	300.2	70.6	67.3	90.5	101.2	95.4	82.0	69.0
30,0°	309.4	311.8	316.7	321.4	324.3	325.7	71.6	72.8	99.5	105.5	94.2	77.4	63.9
32,5°	343.6	347.7	354.2	360.9	365.5	367.3	74.4	79.7	103.8	103.4	90.0	71.8	60.1
35,0°	397.2	401.5	408.3	415.6	421.1	423.2	76.8	87.3	103.6	98.0	83.9	67.8	57.8
37,5°	458.6	460.7	465.4	471.6	476.4	478.5	76.9	87.8	98.3	92.9	82.0	68.9	57.0
40,0°	528.0	528.2	530.0	533.8	537.7	539.5	72.2	82.0	89.2	88.4	82.0	71.0	51.7
42,5°	611.5	609.4	609.9	613.1	616.6	618.5	64.1	70.0	71.9	73.5	74.3	64.9	39.5
45,0°	743.1	741.9	741.6	744.2	746.4	746.1	55.6	57.5	51.3	46.6	48.1	40.8	26.9
47,5°	929.3	940.3	946.8	950.9	952.0	952.1	49.6	52.6	47.8	33.1	29.7	23.0	18.5
50,0°	1186.8	1199.7	1193.9	1180.9	1171.0	1166.6	43.0	45.2	43.8	27.1	20.4	14.7	14.0
52,5°	1377.4	1351.4	1302.2	1241.2	1194.2	1175.1	34.5	30.7	24.5	19.0	15.3	12.7	12.1
55,0°	1335.8	1154.0	1000.3	884.4	811.9	786.2	27.7	20.2	15.6	13.2	12.9	11.5	11.1
57,5°	856.0	629.6	507.8	449.5	423.5	415.0	25.0	17.2	13.2	11.6	11.3	11.0	10.5
60,0°	425.3	369.0	340.9	319.6	305.0	299.2	21.1	15.1	12.0	11.1	10.6	10.6	10.0
62,5°	310.9	275.1	252.5	237.6	230.7	228.5	16.7	12.2	10.4	9.8	9.3	9.0	8.7
65,0°	219.7	206.4	201.0	199.3	195.9	193.2	13.3	10.0	8.6	8.2	7.4	7.0	6.7
67,5°	179.9	174.3	169.7	168.9	165.6	163.0	10.9	8.9	7.8	7.2	6.3	5.7	5.5
70,0°	145.7	142.7	140.2	139.8	131.6	126.6	9.4	7.7	6.9	6.1	5.4	5.1	4.9
72,5°	106.5	102.6	94.0	86.1	78.6	74.7	8.5	6.9	5.7	4.8	4.5	4.4	4.3
75,0°	73.0	61.6	50.5	44.8	39.9	37.4	7.2	5.7	4.4	3.9	3.8	3.8	3.8
77,5°	26.2	19.7	16.1	14.7	13.9	13.5	5.5	4.3	3.3	3.1	3.1	3.1	3.1
80,0°	8.9	8.9	7.9	7.5	7.3	7.3	3.4	2.7	2.4	2.4	2.4	2.4	2.5
82,5°	4.5	4.8	4.6	4.5	4.4	4.3	2.1	1.9	1.8	1.8	1.9	1.9	1.9
85,0°	2.1	2.0	1.8	1.7	1.6	1.6	1.3	1.2	1.3	1.3	1.4	1.4	1.4
87,5°	0.7	0.7	0.7	0.6	0.6	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	0.1	0.1
2,5°	55.9	55.3	54.6	54.1	53.7	53.3	53.0	52.7	52.5	52.2	52.1	0.8	0.9
5,0°	51.8	51.3	50.7	50.4	50.1	49.9	49.8	49.7	49.7	49.5	49.5	1.8	2.6
7,5°	51.1	51.5	52.4	53.8	55.4	57.0	58.5	59.7	60.5	60.9	61.0	3.4	6.0
10,0°	56.6	60.9	65.0	68.2	70.5	72.2	72.9	73.1	73.2	73.1	72.9	5.6	11.6
12,5°	69.9	74.3	76.5	76.5	74.7	72.8	70.9	69.3	68.0	67.1	66.7	7.7	19.4
15,0°	79.5	78.6	75.4	71.9	68.4	65.1	62.3	60.1	58.5	57.4	56.9	9.7	29.1
17,5°	79.2	74.4	69.4	64.6	60.3	56.9	54.4	52.6	51.3	50.4	50.1	11.7	40.8
20,0°	75.0	68.8	62.9	58.1	54.7	52.2	50.2	48.7	47.7	47.0	46.8	13.9	54.7
22,5°	69.9	62.8	57.6	54.0	51.4	49.5	48.1	47.0	46.2	45.6	45.4	16.2	70.9
25,0°	64.4	58.1	54.0	51.3	49.7	48.5	47.5	46.6	45.7	45.1	44.8	18.6	89.5
27,5°	60.3	55.0	51.7	49.8	48.7	47.9	46.6	45.1	43.7	42.7	42.3	21.1	110.6
30,0°	57.0	52.8	50.1	47.9	45.6	42.8	39.3	35.6	32.2	29.8	29.0	23.9	134.4
32,5°	54.2	50.4	45.9	40.5	34.3	27.8	21.9	18.5	17.0	16.6	16.5	27.2	161.6
35,0°	50.1	42.2	33.7	25.9	19.5	16.9	16.0	15.5	15.2	15.1	15.1	31.7	193.2
37,5°	42.2	30.1	22.1	18.2	16.5	15.4	14.7	14.3	14.1	14.0	14.0	37.0	230.2
40,0°	31.0	21.8	18.4	16.6	15.2	14.2	13.6	13.4	13.3	13.3	13.3	43.1	273.4
42,5°	24.7	20.1	17.1	15.3	14.4	13.8	13.4	13.4	13.4	13.5	13.6	49.9	323.3
45,0°	21.6	18.6	16.2	14.8	14.2	14.2	14.1	14.3	14.5	14.6	14.6	58.5	381.8
47,5°	17.9	16.9	15.7	14.7	14.6	15.0	15.2	15.4	15.5	15.5	15.5	70.4	452.3
50,0°	13.9	14.0	14.1	14.5	15.1	15.6	15.8	15.4	14.8	14.4	14.2	84.8	537.1
52,5°	11.8	11.8	12.3	13.2	14.0	14.4	14.0	13.0	12.0	11.3	11.0	94.7	631.8
55,0°	10.7	10.7	10.8	11.0	11.2	11.0	10.5	9.7	9.1	8.6	8.4	91.4	723.2
57,5°	9.9	9.4	9.0	8.6	8.3	8.0	7.7	7.4	7.3	7.1	7.1	77.1	800.3
60,0°	9.1	8.2	7.4	6.9	6.7	6.5	6.3	6.2	6.3	6.4	6.4	63.9	864.2
62,5°	7.8	6.9	6.3	5.9	5.9	5.7	5.6	5.5	5.5	5.6	5.6	49.6	913.8
65,0°	6.2	5.5	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.9	4.9	33.4	947.2
67,5°	5.0	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.4	4.3	19.8	967.0
70,0°	4.6	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.1	4.0	4.0	12.3	979.3
72,5°	4.2	4.1	4.1	4.0	4.0	4.0	3.9	3.9	3.8	3.7	3.7	8.3	987.6
75,0°	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	5.5	993.1
77,5°	3.1	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.7	2.7	2.7	3.1	996.2
80,0°	2.5	2.5	2.5	2.4	2.4	2.4	2.3	2.2	2.2	2.1	2.1	1.7	998.0
82,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.2	999.1
85,0°	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	0.6	999.7
87,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
----------------------------------	--	-----------------------------

siteco

Dimming levels table

environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	72923	1008.4
95	237	251	69600	948.3
90	221	249	65901	884.3
85	206	246	62344	824.4
80	192	244	58786	768.9
75	177	241	54928	709.6
70	163	238	51279	654.3
65	150	235	47791	603.7
60	136	231	43913	549.1
55	123	227	40198	498.5
50	111	224	36675	452.1
45	99	219	33089	405.9
40	87	215	29357	359.6
35	75	209	25599	314.0
30	64	204	21994	272.5
25	53	197	18327	230.9
20	42	188	14665	190.4
15	31	177	10970	143.0
10	21	163	7496	102.4
5	10	136	3629	55.3
1	3	91	1010	27.6

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
76	178	241	53846	708.5
75	175	240	53051	696.7
70	161	237	49578	642.0
65	147	234	45954	587.4
60	134	231	42479	536.9
55	121	227	38878	486.8
50	109	223	35467	440.9
45	97	219	31952	394.8
40	85	214	28323	349.0
35	73	208	24661	303.8
30	63	203	21388	266.4
25	52	196	17814	225.1
20	41	187	14212	184.9
15	30	176	10548	137.1
10	20	161	7103	97.6
5	10	136	3615	54.8
1	3	92	1008	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779414W01AA EAN: 4058352977521	LP number 59473_9
----------------------------------	--	------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	73350.0	1016.3
25.0	54040.0	711.4