




Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
	Version standard bracket Optic asymmetric distribution PL64 with Back Light Control Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 135060 lm Power consumption = 1516.7 W Luminous efficacy = 89 lm/W	serial documentation 30.10.2023





Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1462 cd/klm**

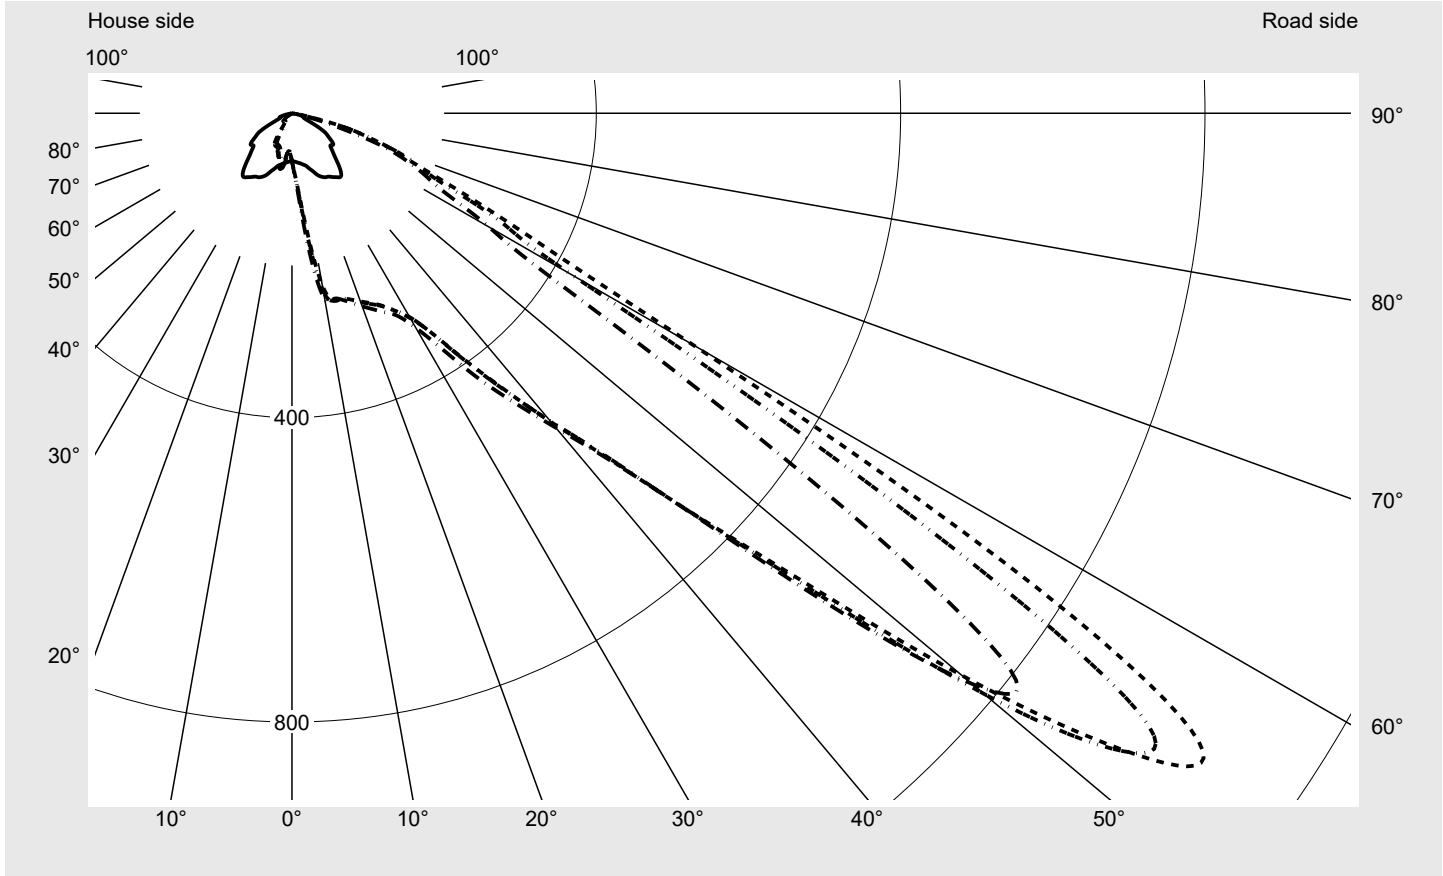


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	145.7
Imax 80°	16.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
-----------------------------------------	------------------------------------------------------------------	------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

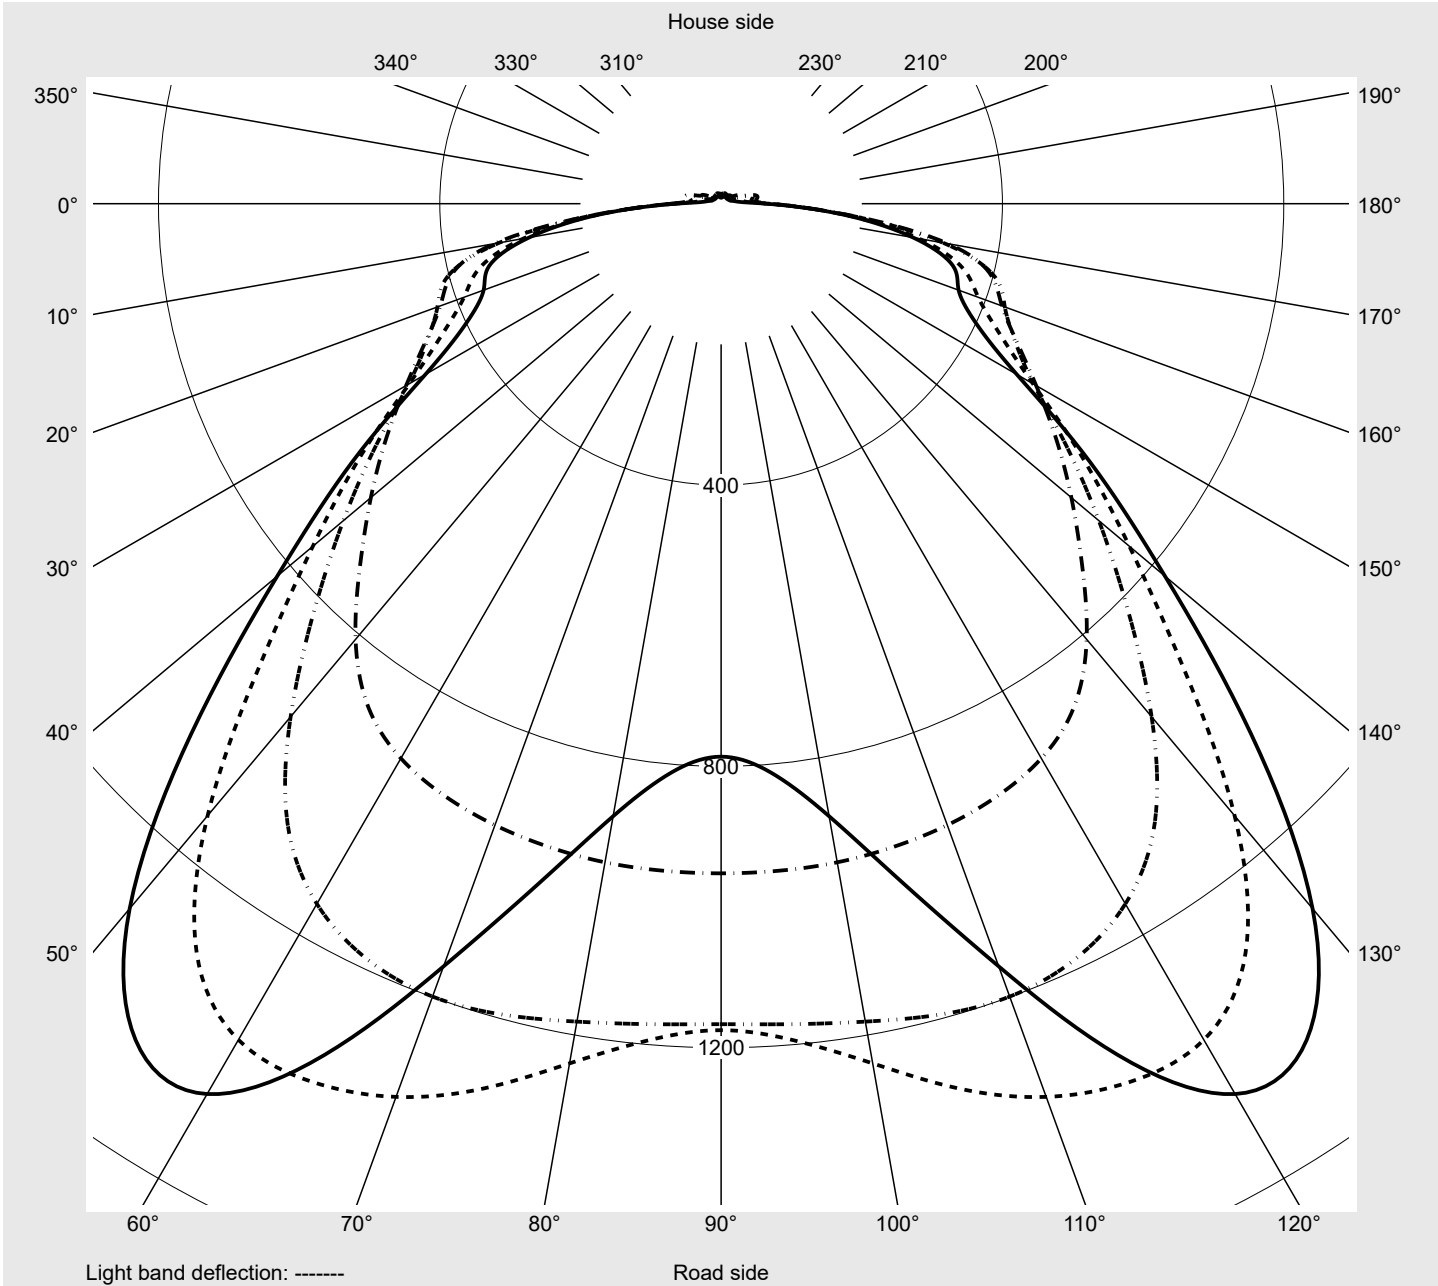

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	63.4	64.7	66.1	67.6	69.2	70.8	72.3	73.7	75.1	76.3	77.4	78.2	79.1
5,0°	64.4	67.5	71.0	74.6	78.0	81.5	84.9	88.4	92.1	95.9	99.7	103.4	106.9
7,5°	65.7	70.6	76.4	81.9	87.5	93.9	101.5	110.2	120.0	130.7	141.9	152.8	163.0
10,0°	67.1	74.4	82.2	90.0	99.5	111.7	126.9	145.4	165.5	184.9	203.0	217.9	229.6
12,5°	69.2	79.1	89.2	101.1	117.5	139.6	166.3	194.5	219.9	238.4	248.9	252.3	252.6
15,0°	71.6	84.3	97.4	115.2	140.8	174.2	209.2	237.6	252.0	255.5	255.0	253.8	252.6
17,5°	76.3	91.9	109.1	135.3	172.4	213.9	246.0	259.0	260.5	259.6	258.2	257.2	256.7
20,0°	81.3	100.8	123.0	158.6	204.9	242.6	264.2	267.8	267.6	266.1	264.6	263.5	263.1
22,5°	87.8	111.1	139.8	186.4	237.8	267.8	276.0	278.3	277.5	275.7	273.0	271.0	270.2
25,0°	92.0	119.6	155.9	212.2	260.8	280.4	287.7	290.0	288.6	285.6	282.2	279.6	278.9
27,5°	94.8	126.2	171.7	236.0	277.2	293.0	301.4	303.6	302.1	299.1	295.4	293.5	292.4
30,0°	96.2	131.3	186.7	254.7	290.3	307.3	316.7	320.1	320.4	319.0	317.3	314.6	311.1
32,5°	99.4	139.7	207.1	277.4	308.5	325.2	335.4	340.9	345.4	348.8	348.3	344.4	343.0
35,0°	102.6	149.9	230.4	304.3	334.9	349.4	360.5	370.6	382.5	390.5	393.1	394.8	395.5
37,5°	105.1	161.5	257.0	334.9	367.0	381.3	392.1	408.3	427.3	440.7	451.1	455.5	456.8
40,0°	99.8	167.8	277.2	362.6	398.3	419.7	432.6	454.6	478.5	502.5	521.2	529.1	529.8
42,5°	89.4	170.7	290.4	376.4	420.6	454.2	477.0	502.3	533.6	568.4	599.5	613.8	615.2
45,0°	78.9	171.8	302.0	379.0	421.5	466.2	509.3	549.4	592.6	643.1	695.4	730.2	741.9
47,5°	71.3	179.8	327.6	398.3	424.9	463.7	517.2	581.2	650.1	725.8	808.6	874.3	910.6
50,0°	66.0	177.9	320.8	403.3	429.3	460.9	513.1	598.8	701.2	818.3	952.3	1075.0	1149.6
52,5°	68.2	173.6	285.7	356.2	389.0	436.7	512.1	625.8	757.8	927.2	1135.9	1300.1	1372.7
55,0°	63.8	171.7	277.4	341.3	359.4	398.9	485.5	640.4	823.9	1065.1	1308.3	1451.5	1461.7
57,5°	56.4	165.5	287.4	358.5	372.9	400.0	478.2	656.4	910.6	1157.5	1355.9	1390.9	1162.0
60,0°	50.0	159.1	294.5	369.0	389.3	428.2	505.7	715.4	965.5	1129.2	1110.8	895.4	607.0
62,5°	37.2	116.8	214.6	286.0	331.4	405.9	552.2	792.3	940.0	804.5	543.0	404.8	355.6
65,0°	24.3	56.9	106.1	158.9	208.1	296.4	467.2	650.4	578.4	314.3	241.2	256.4	245.5
67,5°	17.8	31.0	54.3	91.0	123.8	172.8	263.2	257.0	153.3	133.3	138.1	159.6	177.5
70,0°	16.3	23.3	30.8	46.1	60.5	69.6	73.4	54.9	69.3	68.4	84.2	121.4	141.6
72,5°	16.9	21.9	24.2	29.5	33.8	34.0	30.6	31.7	33.6	45.8	59.8	89.4	105.9
75,0°	13.4	18.6	20.3	24.0	23.3	23.4	23.1	18.8	23.6	34.4	41.2	59.0	72.3
77,5°	9.1	12.9	14.2	17.8	19.0	20.4	18.4	15.9	16.6	24.3	27.4	31.7	31.7
80,0°	5.3	7.9	10.4	12.9	15.6	16.4	15.8	13.3	10.9	11.6	8.1	7.6	8.5
82,5°	2.9	4.9	7.4	9.6	12.2	13.5	11.8	9.9	6.8	4.5	3.9	4.0	4.1
85,0°	1.5	2.5	4.2	5.9	6.7	7.3	6.1	4.3	2.7	2.1	1.8	1.8	1.9
87,5°	0.7	0.9	1.2	1.4	1.4	1.1	0.9	0.8	0.7	0.7	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1
2,5°	79.7	80.2	80.6	81.0	81.6	81.7	62.1	60.9	59.8	59.0	58.1	57.3	56.6
5,0°	110.0	112.9	115.1	117.2	118.9	119.4	61.5	59.3	57.3	55.7	54.4	53.4	52.6
7,5°	171.7	179.1	184.9	189.4	192.4	193.4	61.3	58.0	55.5	53.7	52.5	51.7	51.2
10,0°	237.6	242.7	245.4	246.9	247.6	248.2	61.2	56.9	54.1	52.5	51.7	51.9	53.4
12,5°	251.8	251.1	250.6	250.2	250.0	250.3	61.2	56.1	53.3	52.2	53.1	57.2	64.0
15,0°	252.2	252.2	252.5	252.9	253.1	253.7	61.5	55.6	53.1	53.9	59.8	68.9	75.7
17,5°	257.2	258.1	259.1	259.9	260.7	261.3	63.2	56.5	54.9	60.1	71.4	79.5	82.6
20,0°	264.2	265.7	267.2	268.6	269.5	270.1	65.4	58.3	59.2	71.4	81.7	86.0	81.1
22,5°	271.4	273.9	276.0	277.5	278.4	278.9	68.3	61.1	67.0	82.8	90.4	85.8	77.7
25,0°	279.8	282.7	285.4	287.1	288.2	288.6	69.9	64.1	78.9	92.7	94.3	83.9	73.8
27,5°	292.4	293.8	296.1	298.3	299.5	300.2	70.6	67.3	90.5	101.2	95.4	82.0	69.0
30,0°	309.4	311.8	316.7	321.4	324.3	325.7	71.6	72.8	99.5	105.5	94.2	77.4	63.9
32,5°	343.6	347.7	354.2	360.9	365.5	367.3	74.4	79.7	103.8	103.4	90.0	71.8	60.1
35,0°	397.2	401.5	408.3	415.6	421.1	423.2	76.8	87.3	103.6	98.0	83.9	67.8	57.8
37,5°	458.6	460.7	465.4	471.6	476.4	478.5	76.9	87.8	98.3	92.9	82.0	68.9	57.0
40,0°	528.0	528.2	530.0	533.8	537.7	539.5	72.2	82.0	89.2	88.4	82.0	71.0	51.7
42,5°	611.5	609.4	609.9	613.1	616.6	618.5	64.1	70.0	71.9	73.5	74.3	64.9	39.5
45,0°	743.1	741.9	741.6	744.2	746.4	746.1	55.6	57.5	51.3	46.6	48.1	40.8	26.9
47,5°	929.3	940.3	946.8	950.9	952.0	952.1	49.6	52.6	47.8	33.1	29.7	23.0	18.5
50,0°	1186.8	1199.7	1193.9	1180.9	1171.0	1166.6	43.0	45.2	43.8	27.1	20.4	14.7	14.0
52,5°	1377.4	1351.4	1302.2	1241.2	1194.2	1175.1	34.5	30.7	24.5	19.0	15.3	12.7	12.1
55,0°	1335.8	1154.0	1000.3	884.4	811.9	786.2	27.7	20.2	15.6	13.2	12.9	11.5	11.1
57,5°	856.0	629.6	507.8	449.5	423.5	415.0	25.0	17.2	13.2	11.6	11.3	11.0	10.5
60,0°	425.3	369.0	340.9	319.6	305.0	299.2	21.1	15.1	12.0	11.1	10.6	10.6	10.0
62,5°	310.9	275.1	252.5	237.6	230.7	228.5	16.7	12.2	10.4	9.8	9.3	9.0	8.7
65,0°	219.7	206.4	201.0	199.3	195.9	193.2	13.3	10.0	8.6	8.2	7.4	7.0	6.7
67,5°	179.9	174.3	169.7	168.9	165.6	163.0	10.9	8.9	7.8	7.2	6.3	5.7	5.5
70,0°	145.7	142.7	140.2	139.8	131.6	126.6	9.4	7.7	6.9	6.1	5.4	5.1	4.9
72,5°	106.5	102.6	94.0	86.1	78.6	74.7	8.5	6.9	5.7	4.8	4.5	4.4	4.3
75,0°	73.0	61.6	50.5	44.8	39.9	37.4	7.2	5.7	4.4	3.9	3.8	3.8	3.8
77,5°	26.2	19.7	16.1	14.7	13.9	13.5	5.5	4.3	3.3	3.1	3.1	3.1	3.1
80,0°	8.9	8.9	7.9	7.5	7.3	7.3	3.4	2.7	2.4	2.4	2.4	2.4	2.5
82,5°	4.5	4.8	4.6	4.5	4.4	4.3	2.1	1.9	1.8	1.8	1.9	1.9	1.9
85,0°	2.1	2.0	1.8	1.7	1.6	1.6	1.3	1.2	1.3	1.3	1.4	1.4	1.4
87,5°	0.7	0.7	0.7	0.6	0.6	0.6	0.7	0.8	0.9	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	63.1	0.1	0.1
2,5°	55.9	55.3	54.6	54.1	53.7	53.3	53.0	52.7	52.5	52.2	52.1	0.8	0.9
5,0°	51.8	51.3	50.7	50.4	50.1	49.9	49.8	49.7	49.7	49.5	49.5	1.8	2.6
7,5°	51.1	51.5	52.4	53.8	55.4	57.0	58.5	59.7	60.5	60.9	61.0	3.4	6.0
10,0°	56.6	60.9	65.0	68.2	70.5	72.2	72.9	73.1	73.2	73.1	72.9	5.6	11.6
12,5°	69.9	74.3	76.5	76.5	74.7	72.8	70.9	69.3	68.0	67.1	66.7	7.7	19.4
15,0°	79.5	78.6	75.4	71.9	68.4	65.1	62.3	60.1	58.5	57.4	56.9	9.7	29.1
17,5°	79.2	74.4	69.4	64.6	60.3	56.9	54.4	52.6	51.3	50.4	50.1	11.7	40.8
20,0°	75.0	68.8	62.9	58.1	54.7	52.2	50.2	48.7	47.7	47.0	46.8	13.9	54.7
22,5°	69.9	62.8	57.6	54.0	51.4	49.5	48.1	47.0	46.2	45.6	45.4	16.2	70.9
25,0°	64.4	58.1	54.0	51.3	49.7	48.5	47.5	46.6	45.7	45.1	44.8	18.6	89.5
27,5°	60.3	55.0	51.7	49.8	48.7	47.9	46.6	45.1	43.7	42.7	42.3	21.1	110.6
30,0°	57.0	52.8	50.1	47.9	45.6	42.8	39.3	35.6	32.2	29.8	29.0	23.9	134.4
32,5°	54.2	50.4	45.9	40.5	34.3	27.8	21.9	18.5	17.0	16.6	16.5	27.2	161.6
35,0°	50.1	42.2	33.7	25.9	19.5	16.9	16.0	15.5	15.2	15.1	15.1	31.7	193.2
37,5°	42.2	30.1	22.1	18.2	16.5	15.4	14.7	14.3	14.1	14.0	14.0	37.0	230.2
40,0°	31.0	21.8	18.4	16.6	15.2	14.2	13.6	13.4	13.3	13.3	13.3	43.1	273.4
42,5°	24.7	20.1	17.1	15.3	14.4	13.8	13.4	13.4	13.4	13.5	13.6	49.9	323.3
45,0°	21.6	18.6	16.2	14.8	14.2	14.2	14.1	14.3	14.5	14.6	14.6	58.5	381.8
47,5°	17.9	16.9	15.7	14.7	14.6	15.0	15.2	15.4	15.5	15.5	15.5	70.4	452.3
50,0°	13.9	14.0	14.1	14.5	15.1	15.6	15.8	15.4	14.8	14.4	14.2	84.8	537.1
52,5°	11.8	11.8	12.3	13.2	14.0	14.4	14.0	13.0	12.0	11.3	11.0	94.7	631.8
55,0°	10.7	10.7	10.8	11.0	11.2	11.0	10.5	9.7	9.1	8.6	8.4	91.4	723.2
57,5°	9.9	9.4	9.0	8.6	8.3	8.0	7.7	7.4	7.3	7.1	7.1	77.1	800.3
60,0°	9.1	8.2	7.4	6.9	6.7	6.5	6.3	6.2	6.3	6.4	6.4	63.9	864.2
62,5°	7.8	6.9	6.3	5.9	5.9	5.7	5.6	5.5	5.5	5.6	5.6	49.6	913.8
65,0°	6.2	5.5	5.2	5.2	5.2	5.2	5.1	5.0	4.9	4.9	4.9	33.4	947.2
67,5°	5.0	4.8	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.4	4.3	19.8	967.0
70,0°	4.6	4.5	4.4	4.3	4.3	4.3	4.3	4.2	4.1	4.0	4.0	12.3	979.3
72,5°	4.2	4.1	4.1	4.0	4.0	4.0	3.9	3.9	3.8	3.7	3.7	8.3	987.6
75,0°	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.3	5.5	993.1
77,5°	3.1	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.7	2.7	2.7	3.1	996.2
80,0°	2.5	2.5	2.5	2.4	2.4	2.4	2.3	2.2	2.2	2.1	2.1	1.7	998.0
82,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8	1.2	999.1
85,0°	1.4	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4	0.6	999.7
87,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
----------------------------------	------------------------------------------------------------------	-----------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	135060	1516.7
95	238	252	128359	1419.3
90	222	249	121581	1322.4
85	207	247	114993	1232.2
80	192	244	108098	1142.5
75	177	241	101213	1053.2
70	163	238	94381	969.5
65	150	235	87856	892.7
60	137	231	81192	816.0
55	124	228	74290	739.6
50	111	224	67271	663.7
45	99	219	60701	593.9
40	87	215	53850	524.1
35	76	210	47537	460.9
30	65	204	40801	397.6
25	53	197	33607	328.0
20	42	188	26902	266.2
15	31	177	20064	206.0
10	21	163	13678	143.8
5	10	136	6664	76.0
1	3	91	1911	32.4

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
90	---	---	---	---
85	---	---	---	---
80	---	---	---	---
80	189	243	104148	1116.6
75	175	240	97823	1033.5
70	161	237	91319	950.5
65	148	234	85029	874.2
60	134	231	78109	792.1
55	122	227	71965	721.8
50	109	223	65092	646.5
45	97	219	58651	577.2
40	85	214	51986	508.3
35	74	209	45764	445.6
30	63	203	39178	382.6
25	52	196	32662	319.4
20	41	187	26087	258.3
15	30	176	19284	198.7
10	20	161	12952	135.4
5	10	136	6641	75.3
1	3	92	1906	32.1

Photometric test report

Family Floodlight FL11	Order number: 5XA779425W01AA EAN: 4058352977767	LP number 59473_7
----------------------------------	------------------------------------------------------------------	-----------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	135060.0	1516.7
25.0	105030.0	1129.4