
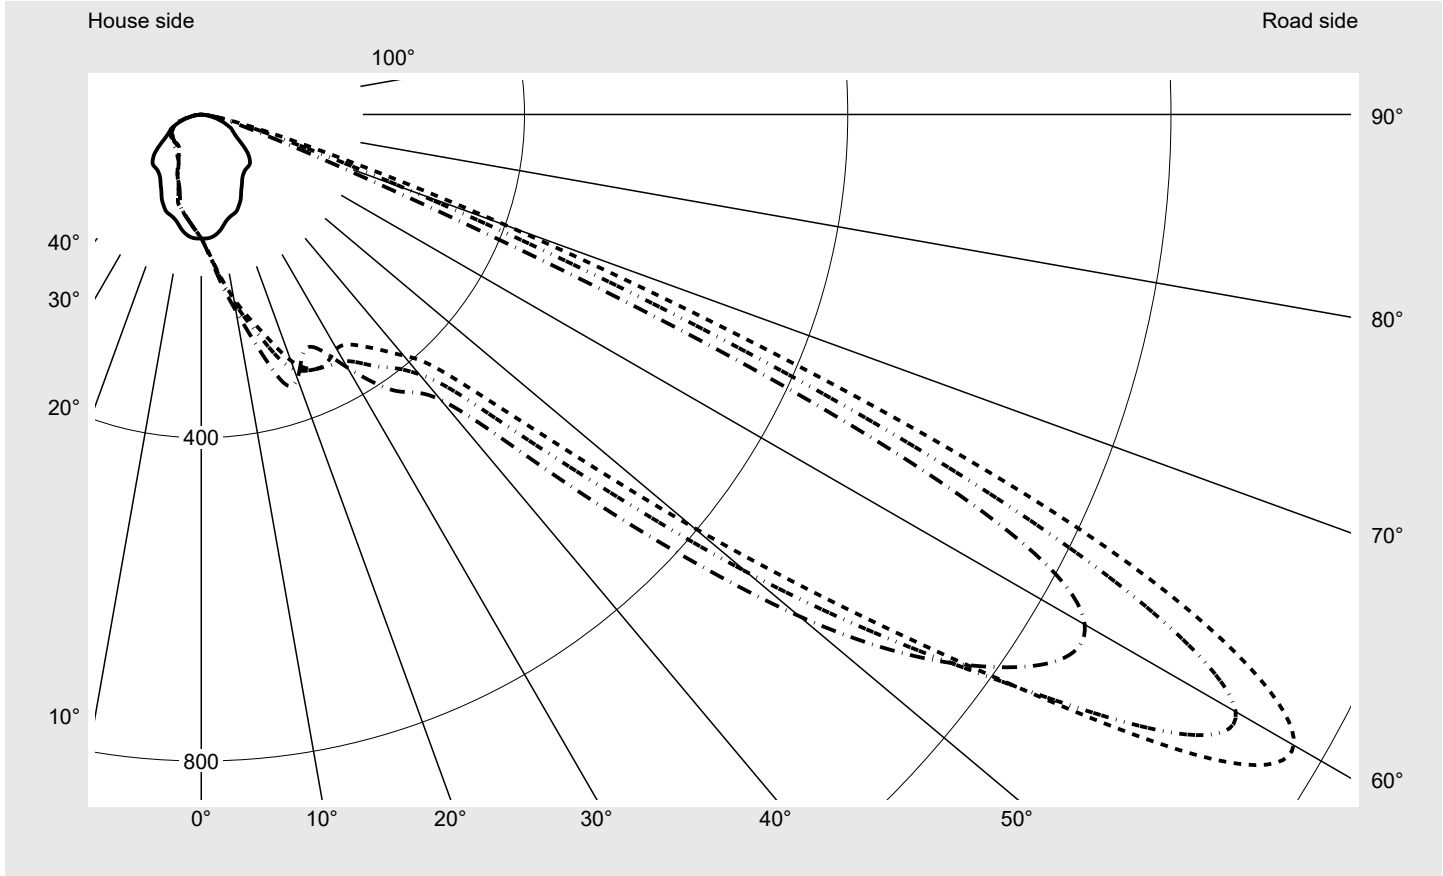


# Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> <b>59517_21</b>
	<b>Version</b> standard bracket <b>Optic</b> asymmetric distribution PL33T <b>Cover</b> toughened safety glass <b>Lamps</b> LED 5700 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Ta = 10 °C Net luminous flux = 191730 lm Power consumption = 1539.6 W Luminous efficacy = 124.5 lm/W	<b>serial documentation</b> 24.11.2023



**Luminous intensity in cd/klm**
C180-0
C245-65
C250-70
C270-90
**Imax: 1561 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	438.4
Imax 80°	22.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> <b>59517_21</b>
---	--	-------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

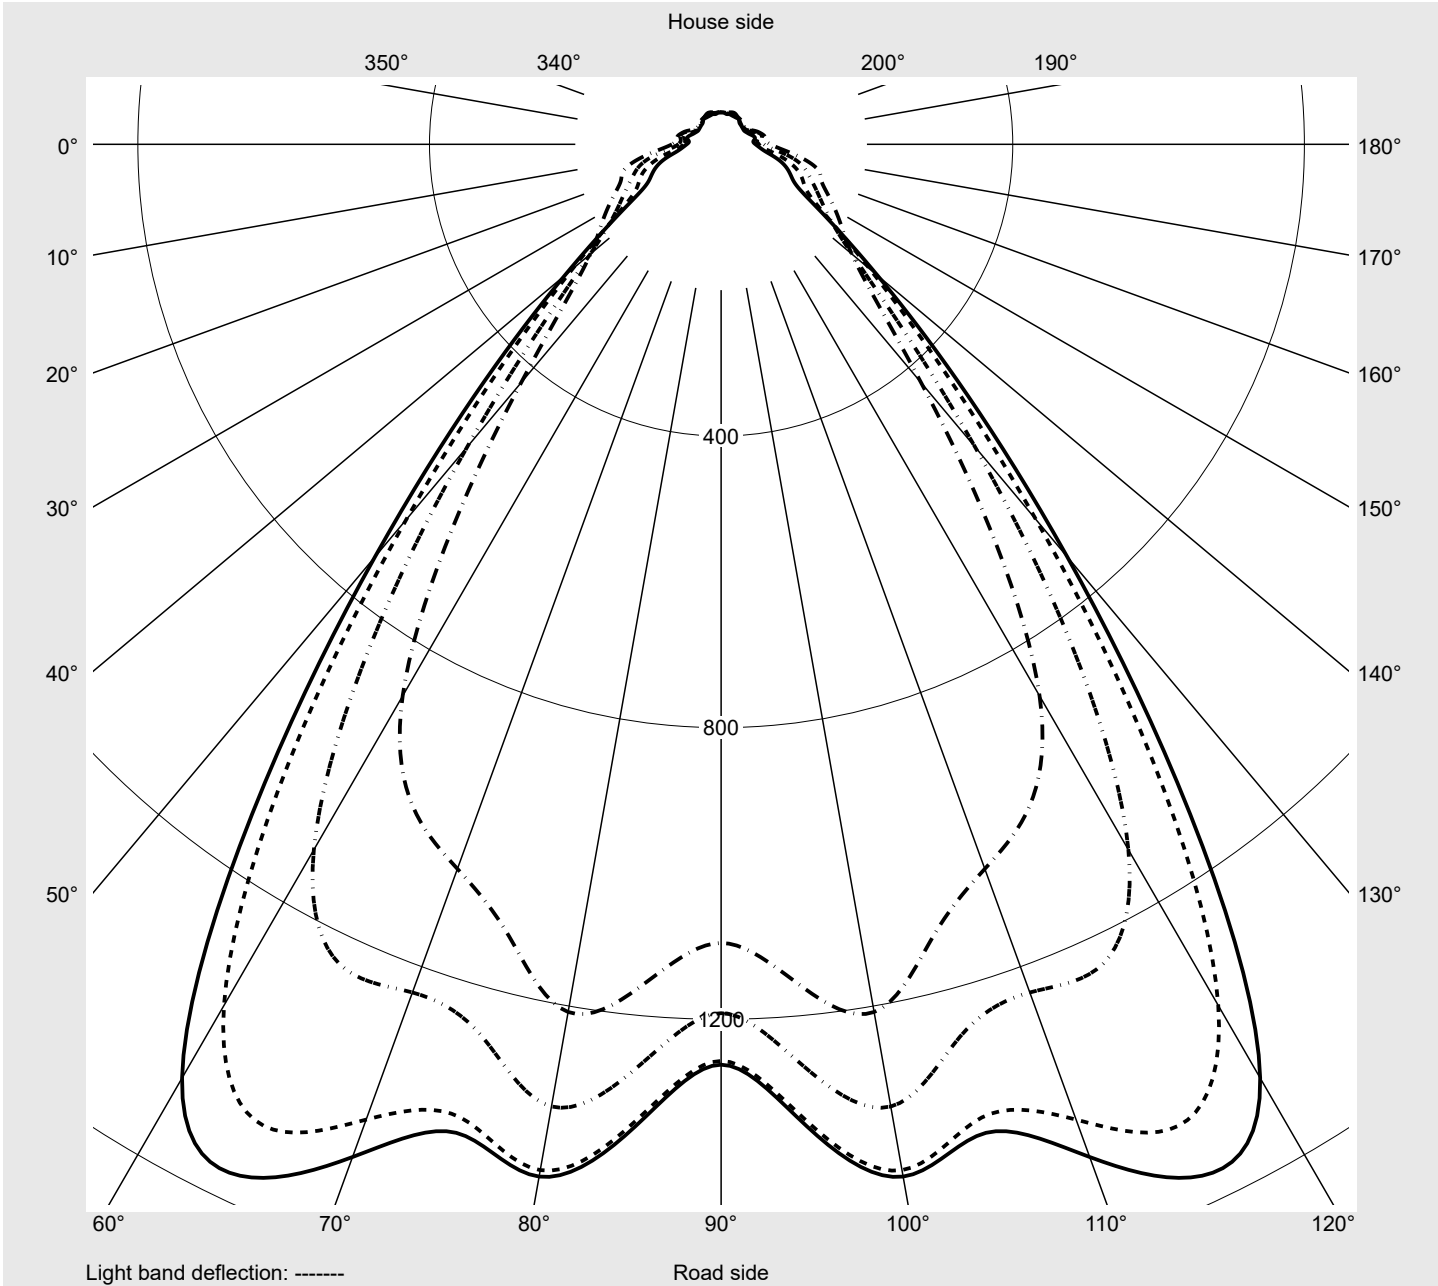

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> <b>59517_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	153.5	154.7	156.0	157.2	158.4	159.5	160.6	161.7	162.7	163.7	164.6	165.4	166.2
5,0°	152.2	154.7	157.5	160.4	163.2	166.0	168.9	171.8	174.6	177.3	179.8	182.2	184.4
7,5°	148.8	152.6	156.9	161.4	165.9	170.6	175.9	180.9	185.9	191.0	196.0	200.7	205.0
10,0°	143.5	148.0	153.6	159.8	166.5	173.4	180.8	188.8	196.8	204.4	211.8	218.7	225.1
12,5°	136.9	142.5	149.3	157.0	165.3	174.6	185.0	195.6	206.1	216.0	225.4	234.7	243.8
15,0°	132.4	139.4	147.4	156.2	165.8	176.6	188.6	201.1	213.3	225.3	237.2	248.9	261.0
17,5°	129.8	138.9	148.6	158.9	170.0	182.1	195.0	207.8	220.7	234.1	248.2	263.6	280.5
20,0°	127.4	138.0	149.7	162.4	175.8	189.2	202.6	216.6	231.7	247.4	265.4	285.7	306.3
22,5°	121.8	134.6	148.8	164.4	179.8	194.7	210.5	229.0	248.6	269.7	291.2	312.3	329.5
25,0°	115.4	128.3	144.2	162.3	179.5	196.7	217.6	241.2	264.8	286.9	307.6	325.1	338.1
27,5°	107.0	120.3	137.3	156.9	176.4	200.1	228.1	254.7	276.7	291.5	303.3	315.3	329.3
30,0°	100.5	112.4	130.0	152.0	177.7	209.2	242.0	270.6	283.9	285.3	286.8	295.9	313.6
32,5°	94.4	106.8	125.8	153.6	186.7	224.7	263.0	287.7	287.8	278.9	276.0	286.6	309.0
35,0°	90.6	102.5	125.1	157.8	197.1	241.6	281.0	294.7	287.3	277.3	277.0	293.5	320.0
37,5°	88.2	102.3	128.5	162.3	205.4	253.8	283.2	285.2	279.0	277.2	283.6	304.3	336.6
40,0°	87.1	102.6	129.4	167.8	212.0	255.2	271.2	268.6	270.6	280.5	293.2	316.4	352.3
42,5°	86.6	103.1	132.1	176.4	217.8	247.4	255.2	255.7	269.9	288.1	304.2	330.1	371.6
45,0°	85.2	102.9	135.1	178.0	211.2	227.5	236.8	250.0	272.6	292.9	312.1	352.6	419.7
47,5°	81.1	101.2	135.7	170.5	193.7	203.3	220.2	242.8	265.2	289.3	324.4	401.1	514.1
50,0°	75.5	96.5	130.7	157.0	169.6	180.7	202.2	225.7	248.3	284.1	357.0	499.5	672.6
52,5°	67.5	85.1	114.4	138.2	146.4	161.2	181.1	203.2	233.8	297.3	426.7	642.1	873.6
55,0°	58.9	70.4	95.7	116.2	129.0	142.9	159.9	185.0	234.4	340.3	541.8	838.2	1117.2
57,5°	51.9	57.8	76.4	97.8	114.3	124.8	140.4	183.1	266.7	417.4	671.9	1032.2	1363.8
60,0°	47.2	53.4	63.8	81.5	96.1	106.8	125.4	179.1	280.4	458.4	738.7	1121.7	1478.7
62,5°	43.7	49.2	55.7	67.7	80.2	91.2	111.0	164.1	263.8	433.5	687.6	1065.2	1453.7
65,0°	40.8	45.0	49.9	59.2	68.7	76.5	91.9	130.2	201.3	339.7	544.8	850.5	1236.6
67,5°	35.3	40.1	43.3	50.2	55.8	59.1	65.1	85.3	130.7	222.0	359.1	551.7	806.5
70,0°	30.2	34.6	38.1	42.9	45.0	44.1	45.3	54.9	81.1	138.7	228.3	341.7	438.4
72,5°	24.5	28.7	32.5	35.0	35.1	34.5	31.8	35.9	51.0	83.4	130.3	190.0	237.4
75,0°	19.4	22.3	25.7	26.9	25.7	26.2	22.6	24.7	33.2	53.0	80.9	114.0	134.8
77,5°	13.6	16.3	18.0	18.2	18.0	19.1	16.4	18.0	23.2	34.4	46.3	54.8	54.6
80,0°	9.1	10.4	11.2	9.6	11.2	12.0	10.2	11.6	13.8	14.2	11.7	12.6	15.7
82,5°	4.9	6.0	5.5	5.0	5.8	6.1	5.5	6.1	6.8	5.9	5.9	6.4	7.8
85,0°	2.1	2.4	2.2	2.2	2.2	2.4	2.2	2.4	2.5	2.5	2.7	2.9	3.2
87,5°	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> <b>59517_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	166.9	167.5	167.9	168.2	168.8	168.9	152.6	151.7	150.7	149.8	148.9	148.1	147.4
5,0°	186.3	188.0	189.3	190.2	191.3	191.5	150.2	148.3	146.7	145.1	143.6	142.5	141.5
7,5°	208.8	212.1	214.8	216.7	218.3	218.7	145.9	143.4	141.5	139.7	137.9	136.3	135.0
10,0°	231.0	236.2	240.4	243.5	246.0	246.7	139.5	136.7	134.6	132.5	130.5	129.3	128.3
12,5°	252.8	261.1	268.3	274.0	278.3	279.4	132.5	129.3	126.9	124.7	123.0	122.1	121.4
15,0°	273.5	286.1	297.8	307.8	315.3	317.7	127.1	123.5	120.2	117.9	116.3	115.0	113.5
17,5°	298.5	315.1	329.1	340.6	348.5	351.0	123.1	118.3	114.4	111.7	109.6	107.5	106.4
20,0°	324.0	335.4	341.5	345.2	347.5	347.9	118.7	112.6	108.3	105.2	102.6	100.9	99.8
22,5°	339.9	343.1	339.3	333.0	327.7	325.5	112.5	105.7	100.8	97.4	95.0	93.3	92.6
25,0°	346.1	346.4	339.3	329.1	320.7	317.3	104.8	97.7	92.8	89.5	87.3	85.6	77.4
27,5°	342.4	349.2	346.7	340.0	334.7	332.7	97.3	90.2	85.6	82.6	80.4	72.7	68.0
30,0°	334.8	352.6	361.4	361.9	361.0	361.6	91.0	84.4	80.2	77.6	73.3	64.6	63.0
32,5°	337.6	364.3	380.7	386.5	388.9	391.4	86.7	80.7	76.4	73.9	66.1	61.6	60.0
35,0°	350.3	380.8	400.8	409.8	413.8	417.1	83.0	78.2	74.3	70.9	63.0	60.4	57.6
37,5°	367.8	396.0	417.4	427.0	431.0	433.7	80.3	76.6	73.7	67.3	62.4	58.4	54.4
40,0°	389.5	419.7	441.8	455.1	459.5	461.1	78.4	74.4	72.1	63.9	59.0	55.4	52.1
42,5°	420.8	465.9	501.1	527.7	532.2	532.2	76.3	71.5	68.1	62.2	56.9	53.2	50.4
45,0°	495.0	564.9	622.6	666.4	664.2	658.6	73.9	68.2	63.4	59.3	54.1	50.9	48.8
47,5°	618.4	704.8	777.8	839.5	823.9	808.3	71.2	66.1	60.5	56.2	50.8	47.2	45.6
50,0°	795.0	880.6	957.4	1034.8	999.6	965.7	67.1	64.2	58.3	53.3	47.6	43.8	42.4
52,5°	1001.2	1057.5	1124.3	1208.4	1151.9	1095.4	61.5	60.9	57.0	52.0	45.9	41.6	40.2
55,0°	1239.9	1237.9	1266.8	1340.0	1266.8	1191.7	55.6	56.8	55.7	50.2	44.4	40.0	38.7
57,5°	1485.1	1423.5	1381.8	1428.6	1344.5	1257.2	49.4	51.6	51.0	45.9	41.3	38.5	37.7
60,0°	1560.9	1478.1	1403.6	1437.6	1352.2	1262.3	44.3	47.2	45.2	41.3	38.6	36.8	36.7
62,5°	1443.4	1316.9	1237.3	1277.1	1214.8	1141.6	40.2	43.6	41.2	38.2	38.0	34.7	34.7
65,0°	1162.2	977.8	893.2	903.2	851.1	796.1	35.6	39.6	37.9	35.1	37.7	33.5	32.3
67,5°	745.1	572.2	483.6	445.3	393.9	356.5	31.0	34.3	34.0	32.0	34.0	30.2	29.8
70,0°	403.1	275.5	207.6	185.5	164.2	149.9	27.1	28.2	29.4	27.6	28.2	25.8	26.1
72,5°	188.8	127.1	103.1	92.6	82.9	76.5	22.7	23.9	24.0	22.5	22.0	21.2	21.5
75,0°	91.4	68.9	61.6	56.0	49.6	47.0	17.3	17.3	17.5	17.6	18.7	19.3	17.4
77,5°	45.5	41.6	38.0	36.2	30.1	29.3	11.8	11.7	12.1	13.3	13.4	16.2	13.8
80,0°	20.0	22.0	21.6	21.0	17.8	16.6	7.6	7.9	8.2	8.4	9.1	9.7	8.9
82,5°	9.7	9.9	9.9	10.6	9.1	8.5	4.3	4.8	5.2	5.3	5.3	4.8	4.8
85,0°	3.4	3.5	3.5	3.8	3.7	3.6	2.0	2.2	2.6	2.5	2.5	2.2	2.4
87,5°	1.3	1.3	1.4	1.4	1.5	1.5	0.7	0.7	0.8	0.9	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> <b>59517_21</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	0.2	0.2
2,5°	146.7	146.1	145.6	145.1	144.8	144.6	144.5	144.2	144.1	144.3	144.3	1.9	2.1
5,0°	140.4	139.4	138.7	138.0	137.6	137.3	137.0	136.8	136.7	136.8	136.8	3.8	5.9
7,5°	133.9	133.0	132.2	131.6	131.0	130.7	130.4	130.2	129.9	130.0	130.0	5.8	11.7
10,0°	127.6	126.9	126.0	125.1	124.4	124.1	123.8	123.5	123.5	123.5	123.5	7.8	19.5
12,5°	120.3	119.5	118.9	118.3	117.8	117.5	117.2	117.1	116.9	117.0	116.9	9.9	29.4
15,0°	112.8	112.0	111.7	111.7	111.9	111.5	109.2	106.3	104.1	102.8	102.3	12.0	41.5
17,5°	105.4	104.8	104.4	100.3	95.6	93.4	92.2	91.6	91.3	91.2	91.3	14.2	55.7
20,0°	99.1	93.9	87.9	86.9	86.8	86.0	85.0	84.2	84.0	84.3	84.4	16.2	71.9
22,5°	84.6	80.6	80.5	80.1	79.0	77.2	75.5	74.4	74.3	74.7	75.0	18.1	90.0
25,0°	74.4	74.2	73.7	72.7	70.7	68.1	65.9	65.0	65.4	66.1	66.2	19.7	109.6
27,5°	67.7	67.3	66.5	65.5	63.5	60.7	58.7	58.5	59.3	60.6	61.8	21.1	130.8
30,0°	62.5	61.8	60.9	59.9	58.2	55.7	54.1	54.0	55.0	57.5	59.1	22.7	153.4
32,5°	59.1	58.1	56.8	55.7	53.9	51.4	50.2	50.6	52.7	54.2	55.1	24.6	178.0
35,0°	55.4	54.0	52.7	51.5	50.2	48.8	48.4	50.2	51.3	52.2	53.5	26.8	204.8
37,5°	52.0	50.9	49.8	49.0	48.3	47.5	48.0	49.5	50.0	51.4	52.7	28.9	233.8
40,0°	49.6	48.7	48.4	47.4	46.9	46.9	47.8	48.7	49.5	50.5	51.9	31.2	264.9
42,5°	47.9	47.0	46.8	46.3	46.9	47.0	47.5	48.1	48.7	50.0	51.3	34.4	299.4
45,0°	47.1	45.9	46.2	46.1	47.1	47.4	47.1	47.3	47.6	48.7	49.8	39.5	338.9
47,5°	45.0	44.4	44.4	45.0	46.0	46.5	46.1	46.2	46.2	46.7	47.5	46.0	384.8
50,0°	42.2	42.4	43.1	44.4	45.1	46.4	46.2	45.9	45.3	45.1	45.5	54.2	439.1
52,5°	39.9	40.9	42.7	43.5	44.4	46.3	46.6	45.5	44.6	44.2	44.4	63.3	502.4
55,0°	38.6	39.7	41.9	42.7	44.3	45.5	46.0	44.6	43.9	43.7	43.7	73.4	575.8
57,5°	37.7	38.8	40.3	42.6	43.6	44.1	44.3	43.7	43.2	44.3	44.2	83.8	659.6
60,0°	37.1	37.8	39.0	41.9	41.9	42.0	42.3	42.8	42.2	43.6	43.8	88.5	748.1
62,5°	35.3	36.0	37.3	38.7	39.6	39.7	40.2	40.6	39.9	40.7	40.9	83.1	831.2
65,0°	32.7	34.0	35.1	35.5	36.2	38.3	38.5	38.9	38.5	37.7	37.8	66.0	897.2
67,5°	30.0	31.7	32.4	32.7	33.6	36.0	36.4	37.5	37.3	36.0	35.7	41.6	938.7
70,0°	26.7	28.8	28.1	29.0	30.7	32.1	33.6	35.6	35.1	34.4	34.3	24.3	963.1
72,5°	22.7	24.0	22.5	23.6	25.5	27.4	29.7	32.1	32.0	31.6	31.5	14.7	977.8
75,0°	17.5	18.2	18.7	19.6	21.2	23.0	25.5	27.2	26.0	23.6	22.4	9.7	987.5
77,5°	13.1	13.8	14.6	15.7	16.8	18.1	20.1	19.5	17.1	16.5	16.4	6.1	993.6
80,0°	8.7	10.1	10.8	11.9	12.2	12.7	13.4	12.7	12.1	12.1	12.0	3.3	996.9
82,5°	5.4	6.5	7.4	8.0	8.4	8.6	8.9	8.6	8.2	8.1	8.1	1.9	998.8
85,0°	2.7	3.4	4.1	4.1	4.2	4.5	4.3	4.1	4.1	4.2	4.3	0.8	999.6
87,5°	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.6	2.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Floodlight FL11</b>	Order number: <b>5XA779428T01AA</b> EAN: <b>4058352019573</b>	LP number <b>59517_21</b>
----------------------------------	--	------------------------------

**siteco**

### Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	190565	1527.0
95	238	252	182211	1440.0
90	222	249	172271	1341.6
85	207	247	162768	1249.9
80	193	244	153495	1164.6
75	178	241	143698	1073.5
70	165	238	134575	995.2
65	151	235	124563	910.9
60	138	232	115079	833.1
55	125	228	105432	755.5
50	113	224	96207	683.9
45	100	220	86055	607.2
40	88	215	76415	536.5
35	77	210	67454	472.1
30	65	204	57326	402.0
25	54	197	48057	337.2
20	43	189	38616	274.4
15	32	178	29166	213.4
10	21	163	19192	145.6
5	10	136	9423	76.6
1	3	91	2690	32.4

### Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	221	249	167321	1326.3
85	206	246	158245	1234.9
80	191	244	148701	1144.2
75	176	241	139200	1053.4
70	162	238	129769	969.6
65	149	235	120863	891.7
60	136	231	111647	814.5
55	123	228	102211	737.8
50	111	224	93230	666.6
45	98	219	83318	590.2
40	87	215	74675	525.9
35	75	209	65148	456.2
30	64	204	55957	392.7
25	53	197	46805	328.5
20	42	188	37537	266.3
15	31	177	28136	206.1
10	20	161	18207	137.0
5	10	136	9396	75.8
1	3	92	2684	32.0

**Photometric test report**

<b>Family</b> Floodlight FL11	<b>Order number: 5XA779428T01AA</b> <b>EAN: 4058352019573</b>	<b>LP number</b> 59517_21
----------------------------------	--	------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	191730.0	1539.6
25.0	168780.0	1341.0