


Photometric test report

Family Apollon® 31	Order number: 51MP11WD2442M EAN: 4058352943892	LP number 59516_6
	Version	recessed luminaire for lay-in mounting, square M625, wide distribution, UGR≤19 (L65≤3000cd/m²)
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 4000 lm Power consumption = 27.5 W Luminous efficacy = 145.5 lm/W
		serial documentation 11.12.2023
		

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 456 cd/klm

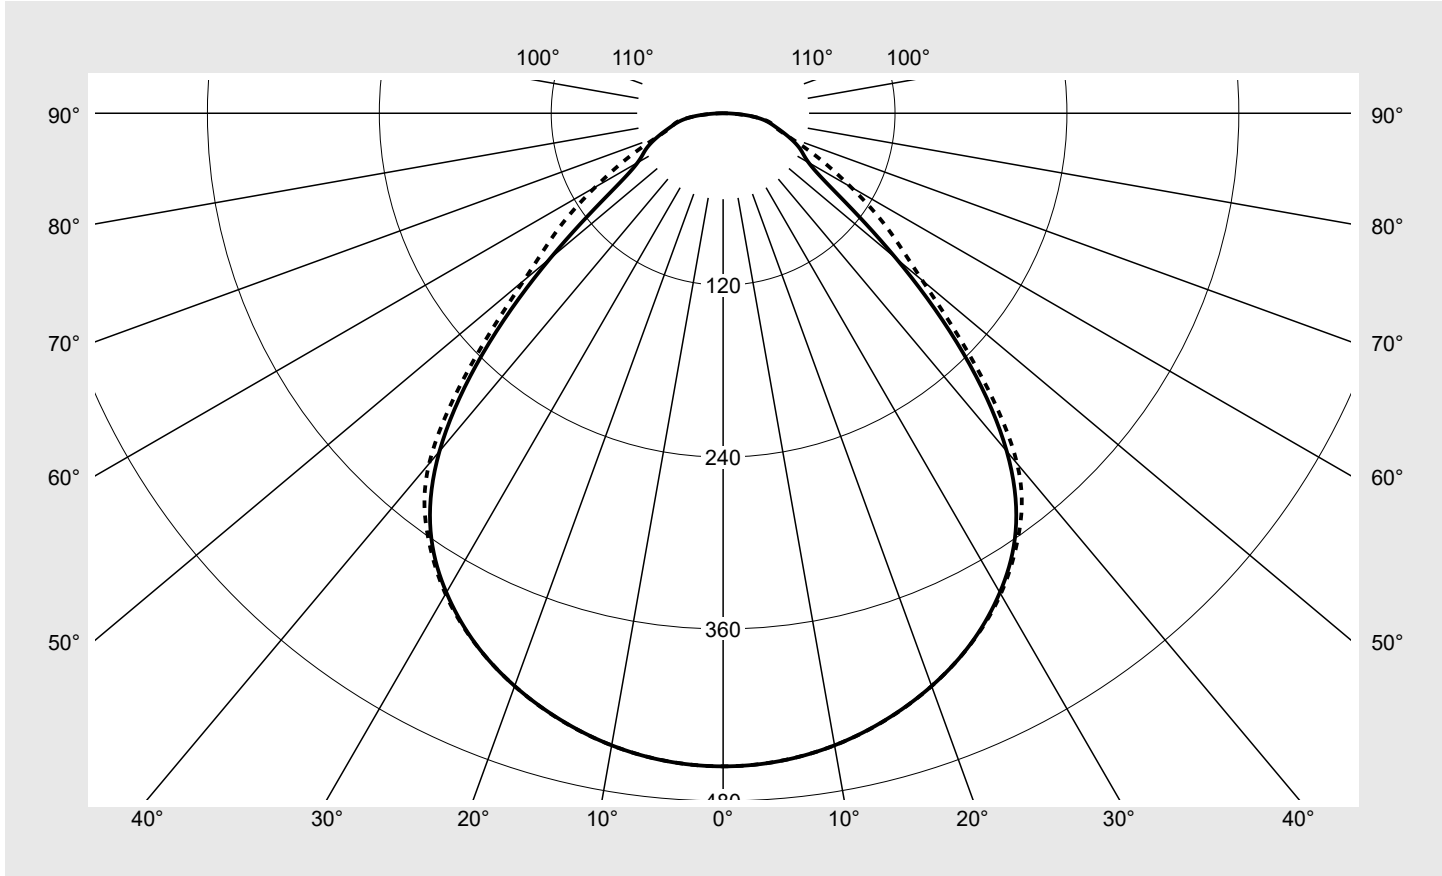

Classifications	
DIN 5040	A 5 0
CIE	N1=61 N2=87 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Apollon® 31	Order number: 51MP11WD2442M EAN: 4058352943892	LP number 59516_6
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	455.9	455.9	455.9	455.9	455.9	455.9	455.9
5°	454.0	453.9	453.9	453.9	453.9	453.9	453.9
10°	448.0	448.0	448.0	448.1	448.1	448.1	448.1
15°	438.4	438.3	438.4	438.5	438.5	438.6	438.5
20°	425.5	425.3	425.3	425.5	425.7	425.7	425.5
25°	408.8	408.7	408.7	408.8	409.0	409.1	408.9
30°	386.3	386.6	386.8	387.0	387.1	387.3	387.6
35°	356.0	357.3	358.0	358.0	357.9	358.4	359.6
40°	308.0	312.5	314.7	314.8	313.9	315.4	319.3
45°	237.4	240.4	242.0	242.0	242.8	245.2	249.3
50°	157.6	168.1	171.3	167.4	163.5	168.2	181.5
55°	95.3	119.8	128.0	119.9	107.7	114.5	140.2
60°	69.0	89.0	96.4	91.3	79.3	83.2	102.9
65°	59.5	68.4	72.7	72.3	65.8	66.0	72.9
70°	49.1	51.9	54.5	56.9	54.9	52.5	49.7
75°	38.5	40.5	42.0	43.2	41.8	40.0	37.8
80°	30.1	29.9	29.5	28.8	29.4	30.3	31.5
85°	16.8	15.8	15.0	14.4	15.2	15.6	15.7
90°	0.6	0.6	0.5	0.3	0.3	0.3	0.3
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Apollon® 31	Order number: 51MP11WD2442M EAN: 4058352943892	LP number 59516_6
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	455.9	455.9	455.9	455.9	455.9	455.9	2.7	2.7
5°	453.9	453.9	453.9	453.9	453.9	454.0	21.7	24.4
10°	448.1	448.1	448.1	448.0	448.0	448.0	42.6	67.1
15°	438.6	438.5	438.5	438.4	438.3	438.4	62.2	129.3
20°	425.7	425.7	425.5	425.3	425.3	425.5	79.8	209.0
25°	409.1	409.0	408.8	408.7	408.7	408.8	94.7	303.7
30°	387.3	387.1	387.0	386.8	386.6	386.3	106.1	409.8
35°	358.4	357.9	358.0	358.0	357.3	356.0	112.5	522.3
40°	315.4	313.9	314.8	314.7	312.5	308.0	110.7	633.0
45°	245.2	242.8	242.0	242.0	240.4	237.4	94.0	727.0
50°	168.2	163.5	167.4	171.3	168.1	157.6	70.5	797.6
55°	114.5	107.7	119.9	128.0	119.8	95.3	53.0	850.5
60°	83.2	79.3	91.3	96.4	89.0	69.0	41.5	892.1
65°	66.0	65.8	72.3	72.7	68.4	59.5	34.1	926.1
70°	52.5	54.9	56.9	54.5	51.9	49.1	27.5	953.6
75°	40.0	41.8	43.2	42.0	40.5	38.5	21.7	975.3
80°	30.3	29.4	28.8	29.5	29.9	30.1	16.1	991.4
85°	15.6	15.2	14.4	15.0	15.8	16.8	8.4	999.8
90°	0.3	0.3	0.3	0.5	0.6	0.6	0.2	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Apollon® 31	Order number: 51MP11WD2442M EAN: 4058352943892	LP number 59516_6
------------------------------	---	-----------------------------

siteco

UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.4	16.9	15.7	17.2	17.6	15.5	17.0	15.8	17.3	17.6
	3H	16.3	17.6	16.6	18.0	18.3	16.4	17.7	16.7	18.1	18.4
	4H	16.7	18.0	17.1	18.4	18.8	16.8	18.1	17.2	18.5	18.8
	6H	17.3	18.5	17.7	18.8	19.2	17.3	18.5	17.8	18.9	19.3
	8H	17.5	18.7	18.0	19.0	19.4	17.6	18.8	18.0	19.1	19.5
	12H	17.8	18.8	18.2	19.2	19.6	17.9	18.9	18.3	19.3	19.7
4H	2H	15.8	17.1	16.2	17.5	17.8	15.9	17.2	16.3	17.5	17.9
	3H	16.9	18.0	17.4	18.4	18.8	17.0	18.1	17.4	18.5	18.9
	4H	17.6	18.6	18.0	19.0	19.4	17.6	18.6	18.1	19.0	19.5
	6H	18.3	19.1	18.8	19.6	20.0	18.4	19.2	18.8	19.6	20.1
	8H	18.6	19.4	19.1	19.9	20.3	18.7	19.5	19.2	19.9	20.4
	12H	18.9	19.6	19.4	20.1	20.6	19.0	19.7	19.5	20.1	20.6
8H	4H	17.9	18.7	18.4	19.1	19.6	18.0	18.7	18.4	19.2	19.7
	6H	18.8	19.4	19.3	19.9	20.4	18.8	19.5	19.3	20.0	20.5
	8H	19.2	19.8	19.7	20.3	20.8	19.3	19.9	19.8	20.3	20.9
	12H	19.6	20.1	20.2	20.6	21.2	19.7	20.1	20.2	20.6	21.2
12H	4H	18.0	18.7	18.5	19.1	19.6	18.0	18.7	18.5	19.2	19.7
	6H	18.9	19.5	19.4	19.9	20.5	19.0	19.5	19.5	20.0	20.5
	8H	19.4	19.9	19.9	20.4	20.9	19.4	19.9	20.0	20.4	21.0

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 555 B = 555											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	4359.0	4415.3	4443.9	4444.8	4459.3	4503.7	4578.0	4503.7	4459.3	4444.8	4443.9	4415.3	4359.0
50°	3184.2	3395.0	3460.7	3381.3	3302.2	3397.6	3667.6	3397.6	3302.2	3381.3	3460.7	3395.0	3184.2
55°	2158.3	2713.1	2898.8	2715.6	2438.5	2591.2	3173.8	2591.2	2438.5	2715.6	2898.8	2713.1	2158.3
60°	1790.9	2310.4	2503.5	2370.2	2060.6	2161.6	2673.3	2161.6	2060.6	2370.2	2503.5	2310.4	1790.9
65°	1828.1	2102.5	2233.2	2220.2	2020.8	2027.8	2241.4	2027.8	2020.8	2220.2	2233.2	2102.5	1828.1
70°	1862.5	1970.6	2069.9	2160.6	2085.8	1994.1	1885.4	1994.1	2085.8	2160.6	2069.9	1970.6	1862.5
75°	1933.6	2029.7	2108.1	2168.8	2098.2	2006.9	1895.0	2006.9	2098.2	2168.8	2108.1	2029.7	1933.6
80°	2249.6	2239.4	2207.3	2153.2	2196.9	2263.6	2353.1	2263.6	2196.9	2153.2	2207.3	2239.4	2249.6
85°	2506.1	2360.7	2241.2	2147.6	2257.3	2322.7	2343.9	2322.7	2257.3	2147.6	2241.2	2360.7	2506.1

Photometric test report

Family Apollon® 31	Order number: 51MP11WD2442M EAN: 4058352943892	LP number 59516_6
-------------------------------------	---	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

