

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2GC1F08HE
EAN: 4069025225399

LP number
58294_567

serial
documentation
24.06.2024



Version post-top or side-entry mounting, Colour Switch
Optic asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)
Cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Setting individual position
Rated values Net luminous flux = 8600 lm
 Power consumption = 61.0 W
 Luminous efficacy = 141 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 514 cd/klm

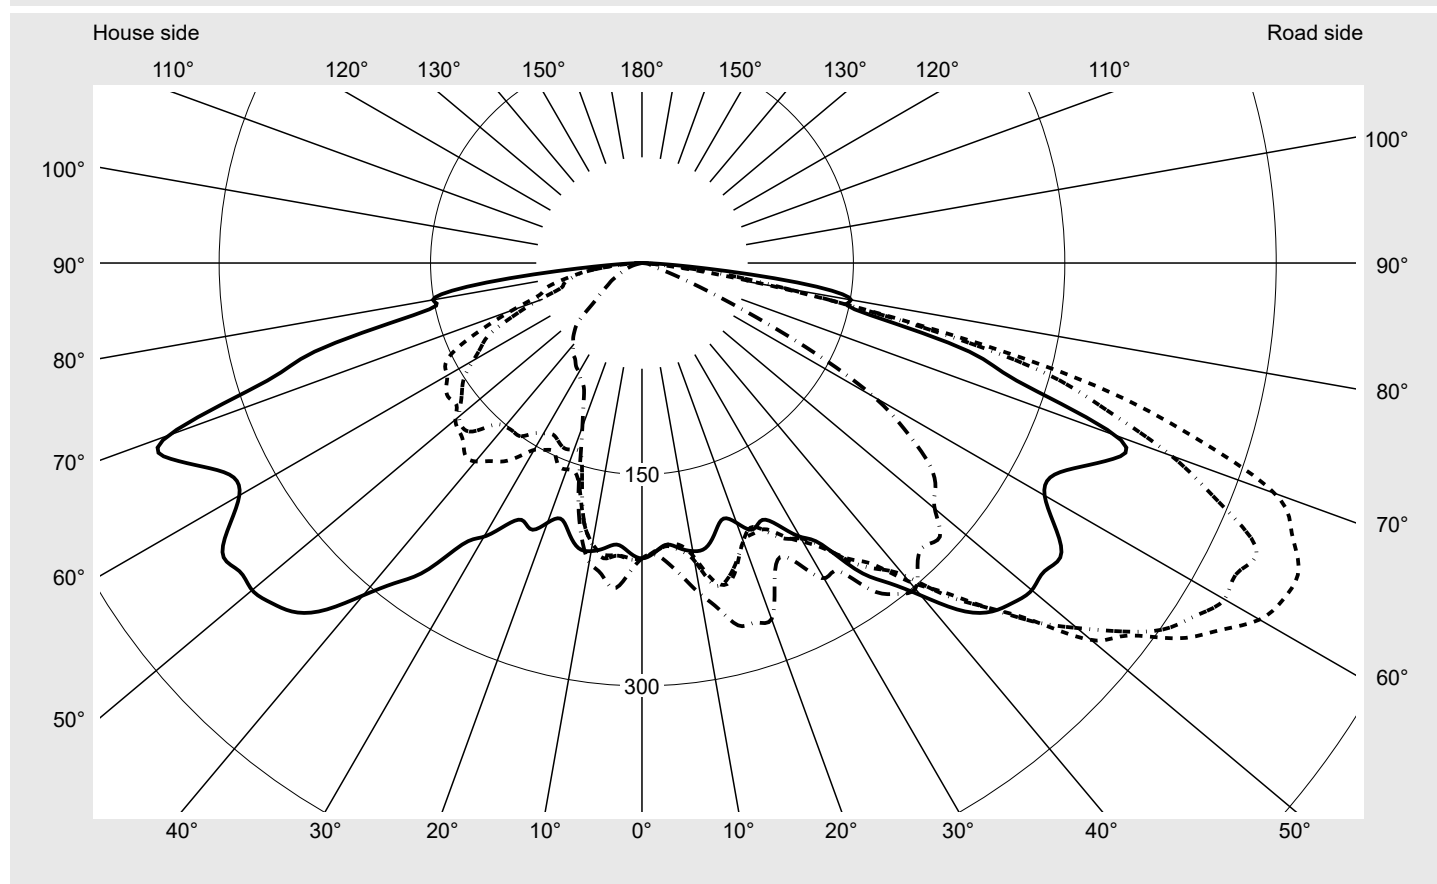

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	477.9
Imax 80°	150.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2GC1F08HE
EAN: 4069025225399

LP number
58294_567

Envelope curve in cd/klm

KMK 62.5°


KMK 60°

KMK 57.5°

KMK 55°

sit

eco

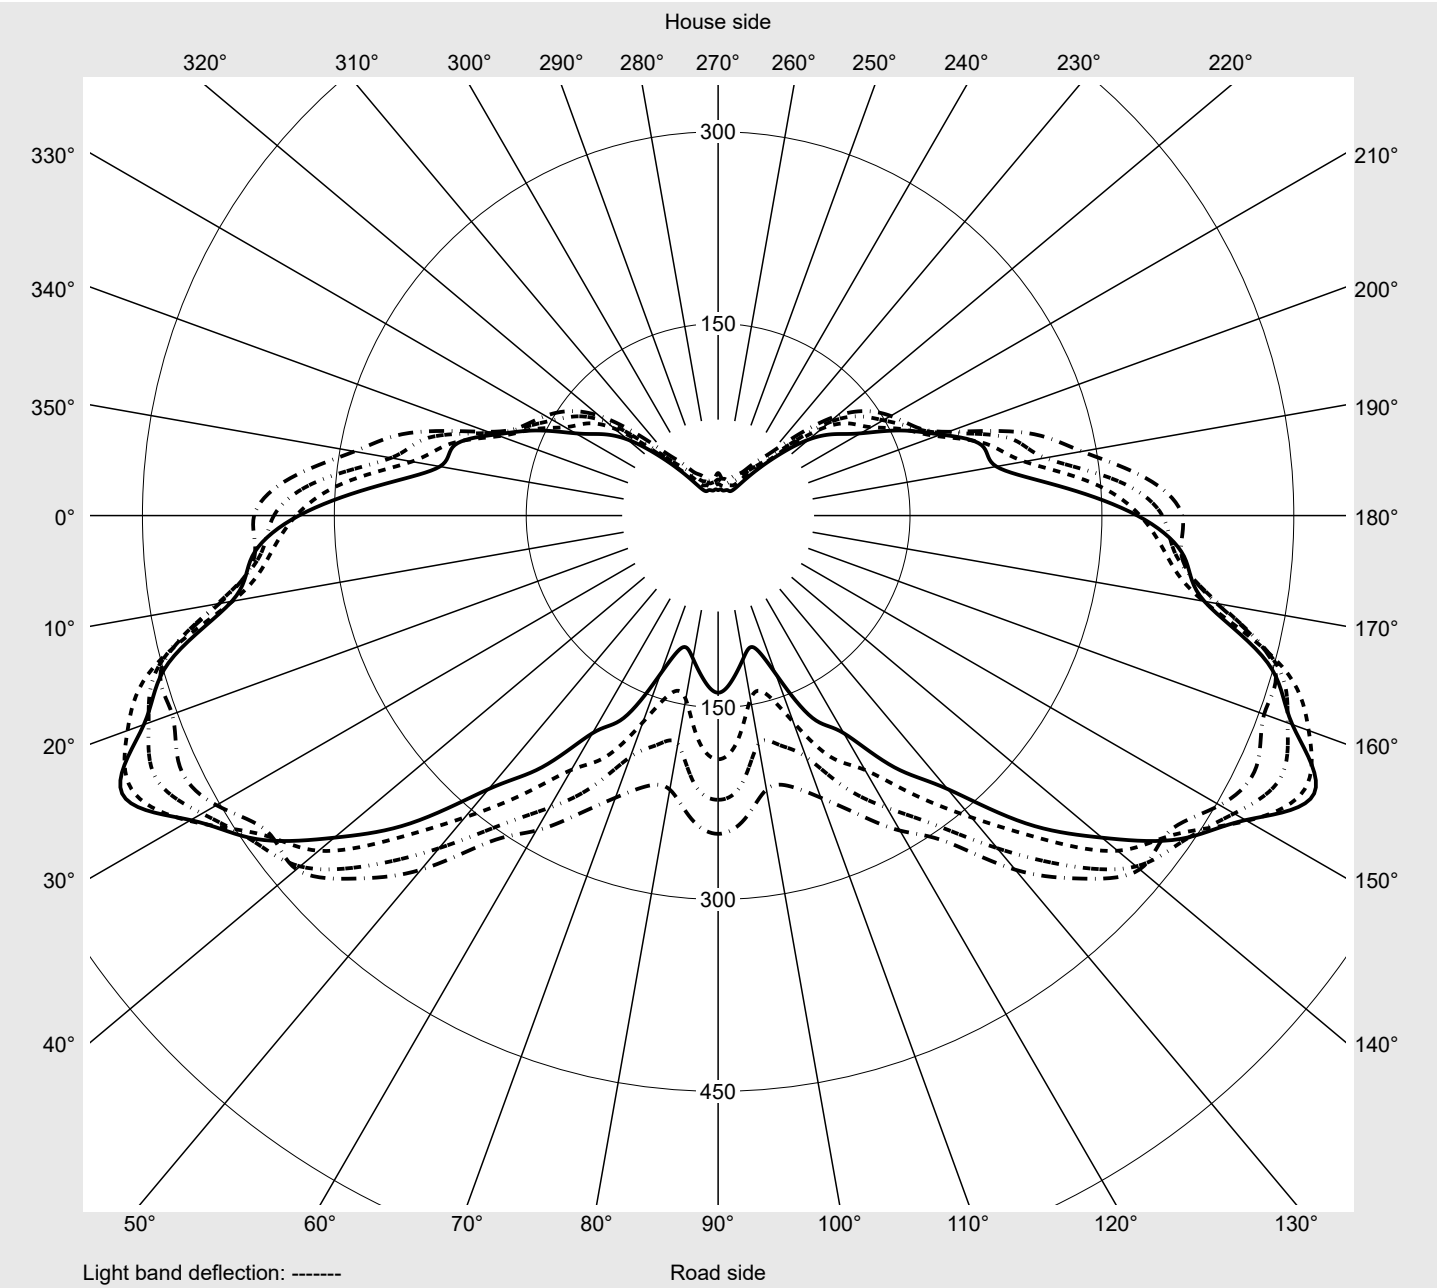

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2GC1F08HE EAN: 4069025225399	LP number 58294_567
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	205.6	205.7	205.1	204.9	205.0	204.7	205.4	206.0	205.3	204.4	203.8	203.2	203.2
5,0°	200.6	200.0	200.2	201.0	201.0	200.8	201.6	203.7	204.4	207.0	208.6	208.8	209.5
7,5°	204.1	204.0	201.6	200.1	200.5	201.7	205.6	211.5	213.9	215.7	216.6	218.7	220.9
10,0°	207.6	209.2	209.7	209.8	209.4	211.5	214.5	217.2	219.6	222.1	226.6	230.1	232.8
12,5°	207.3	213.8	219.7	222.4	226.4	229.8	233.4	232.9	229.9	232.2	233.3	236.0	235.0
15,0°	199.0	200.3	211.5	229.6	237.5	235.5	232.7	228.6	224.1	226.5	229.3	229.9	235.7
17,5°	190.4	197.3	210.2	222.7	225.6	224.7	222.5	217.1	223.5	219.7	214.6	212.5	217.6
20,0°	196.1	203.0	207.3	214.6	213.8	210.1	210.1	216.7	224.8	216.2	208.8	208.6	214.3
22,5°	204.7	210.2	206.9	215.4	212.0	207.6	202.9	210.8	212.9	212.7	211.4	211.9	212.6
25,0°	201.2	207.7	211.1	218.3	214.4	208.4	210.5	217.3	217.4	220.3	221.0	220.3	222.0
27,5°	210.0	215.2	216.1	218.3	219.0	218.7	220.5	224.0	230.0	232.2	238.2	239.3	248.8
30,0°	224.2	230.6	232.5	231.7	231.8	228.4	225.6	229.7	241.6	250.9	258.1	265.1	275.3
32,5°	236.4	239.9	242.1	243.2	242.8	240.1	238.5	242.0	259.4	270.0	276.8	284.1	289.7
35,0°	266.1	266.9	261.8	256.5	252.6	256.3	258.8	263.1	271.7	283.6	290.8	306.4	310.7
37,5°	285.6	282.4	281.9	272.6	261.9	269.5	273.5	280.9	289.8	295.2	309.0	335.0	331.2
40,0°	307.8	307.6	298.3	291.3	284.3	295.0	289.2	296.4	304.1	319.2	325.8	343.3	347.7
42,5°	334.2	326.4	325.3	318.4	314.5	316.6	320.2	318.3	317.8	333.8	340.8	351.7	353.4
45,0°	349.9	346.2	344.7	343.7	341.8	345.2	345.6	339.4	342.9	358.9	350.5	347.1	349.5
47,5°	356.8	353.9	367.5	388.9	362.0	375.2	376.5	367.6	369.2	367.0	359.1	339.7	345.5
50,0°	361.1	368.7	382.5	428.7	381.0	416.2	402.8	390.6	393.2	377.3	353.6	334.3	323.6
52,5°	359.6	357.8	391.5	430.5	422.3	434.1	429.4	415.4	416.5	391.3	357.8	320.9	299.8
55,0°	362.7	363.8	395.8	449.4	454.2	464.3	452.8	430.3	430.2	401.3	361.3	311.3	284.3
57,5°	347.2	359.5	397.5	452.4	473.7	485.1	465.8	443.6	426.6	387.0	339.4	294.9	263.7
60,0°	329.9	351.7	385.3	456.5	491.3	506.0	477.3	434.9	407.6	357.1	307.9	266.0	229.6
62,5°	327.7	365.6	386.0	444.8	477.7	514.1	476.0	440.8	391.7	340.2	279.0	240.2	196.4
65,0°	342.5	392.5	389.2	425.5	456.9	514.1	481.3	416.2	364.1	317.6	257.1	222.8	161.8
67,5°	362.5	436.1	382.5	401.8	447.8	498.9	442.9	393.8	331.6	288.5	228.0	195.2	143.3
70,0°	357.4	420.3	359.9	368.3	453.9	477.9	399.8	347.8	309.6	257.3	197.9	158.9	124.3
72,5°	280.3	372.1	312.1	330.4	401.3	410.8	344.5	287.0	267.7	217.5	167.3	129.5	110.8
75,0°	237.1	318.5	240.6	282.1	301.1	327.3	288.7	220.4	187.0	164.0	134.5	116.5	98.1
77,5°	158.0	221.9	166.9	207.0	172.4	196.4	186.9	147.0	122.7	116.0	90.3	82.7	70.0
80,0°	150.6	123.0	102.1	123.8	86.4	93.9	102.8	105.1	85.9	78.7	44.1	38.5	30.3
82,5°	120.2	63.8	40.9	40.4	26.6	34.2	53.9	70.5	52.4	35.3	21.3	16.9	11.9
85,0°	49.4	23.6	13.4	9.2	7.5	9.3	11.5	16.7	14.6	10.6	10.4	8.0	6.3
87,5°	11.8	8.1	5.5	4.8	4.2	4.6	4.8	5.1	5.3	4.8	4.2	4.0	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2GC1F08HE EAN: 4069025225399	LP number 58294_567
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	203.1	203.0	204.6	205.3	206.0	206.9	205.5	206.6	207.7	208.7	209.5	210.3	210.8
5,0°	209.5	210.0	210.5	212.3	214.2	213.9	201.5	202.7	202.5	204.3	208.1	208.4	207.5
7,5°	222.3	225.1	226.3	226.7	226.6	225.1	204.0	203.4	204.4	205.7	208.7	211.2	210.9
10,0°	232.0	231.2	232.4	233.6	235.5	238.6	202.7	201.4	201.3	202.7	202.3	202.6	205.2
12,5°	238.9	241.7	245.2	248.7	252.4	251.4	199.3	198.0	192.9	190.6	189.2	189.1	189.2
15,0°	236.9	243.3	249.4	258.1	262.3	266.4	194.4	191.9	184.6	178.8	169.3	164.2	160.6
17,5°	229.2	238.9	247.9	257.1	263.7	267.5	189.4	185.9	180.3	171.1	156.3	143.4	139.0
20,0°	221.0	231.2	243.0	255.2	265.6	268.8	191.0	182.0	174.2	167.5	155.8	140.7	134.8
22,5°	221.6	232.4	245.3	250.3	249.5	245.8	191.4	178.6	167.4	160.1	155.3	142.5	129.7
25,0°	228.0	237.5	241.9	238.9	237.8	230.6	192.1	174.4	168.7	155.9	147.8	139.9	126.5
27,5°	249.4	250.2	249.0	248.4	241.2	240.7	196.6	184.1	170.0	160.9	149.5	137.1	126.3
30,0°	274.3	269.2	254.3	256.1	254.8	258.3	216.4	204.4	186.6	170.7	153.1	139.5	127.1
32,5°	284.4	271.3	265.0	270.9	265.3	259.0	230.9	220.2	200.6	179.6	162.9	143.3	130.1
35,0°	305.2	293.7	290.6	292.2	285.6	283.0	265.8	250.6	220.5	193.1	171.9	150.0	132.3
37,5°	319.7	309.7	294.0	286.7	287.8	296.0	285.3	272.2	235.5	205.4	177.1	150.4	133.1
40,0°	337.7	321.9	291.1	275.9	284.7	301.7	313.3	292.7	247.2	217.3	183.8	151.3	139.1
42,5°	348.9	316.1	291.3	275.9	286.3	289.4	326.8	308.0	255.6	226.7	185.4	155.6	143.3
45,0°	352.6	315.7	285.9	274.4	284.0	283.7	347.3	328.5	269.4	236.2	179.4	168.9	149.4
47,5°	346.6	306.7	270.7	272.1	287.2	286.8	361.2	325.8	276.9	229.4	176.2	172.7	157.7
50,0°	323.6	284.0	254.7	255.4	280.5	271.1	358.8	318.5	269.0	216.6	172.8	169.4	157.1
52,5°	288.6	264.3	237.6	247.2	255.4	262.4	346.6	305.4	258.6	200.4	165.8	161.9	149.4
55,0°	257.2	234.7	219.2	217.5	238.2	248.8	335.7	288.7	249.7	191.5	167.0	155.8	142.3
57,5°	234.4	200.7	185.7	181.4	210.8	222.2	313.1	259.6	234.8	188.7	164.8	149.0	135.2
60,0°	208.2	171.9	144.2	145.7	176.3	190.5	293.5	243.1	216.8	181.7	159.6	138.1	125.5
62,5°	174.5	131.7	106.6	113.4	128.8	138.5	266.9	220.9	213.1	185.2	157.4	128.5	111.0
65,0°	137.2	94.0	76.8	79.0	87.3	81.9	252.2	222.4	206.5	180.2	146.4	119.0	100.4
67,5°	107.2	66.9	52.5	43.4	43.5	43.9	242.0	221.7	206.9	161.7	123.0	99.6	85.2
70,0°	90.4	52.1	32.8	21.8	21.0	21.8	214.0	256.9	208.7	129.3	97.7	80.3	74.0
72,5°	76.2	30.7	18.8	12.2	11.0	10.5	204.4	243.7	153.8	99.0	76.8	61.5	58.7
75,0°	60.2	19.9	12.8	9.5	8.5	8.3	180.0	179.3	126.0	89.8	71.5	57.5	49.9
77,5°	25.1	13.9	9.2	7.5	7.0	6.6	142.6	126.0	117.7	76.6	60.8	52.4	41.5
80,0°	13.4	9.4	6.7	5.7	5.4	5.4	107.1	124.7	99.0	59.9	47.4	45.6	27.2
82,5°	8.6	6.4	4.8	4.1	4.1	4.3	61.7	98.1	69.3	43.9	35.9	33.0	21.7
85,0°	5.2	4.0	3.0	2.6	2.2	2.2	35.4	45.5	27.0	19.3	18.2	15.9	11.8
87,5°	2.9	2.2	1.6	1.3	1.0	1.0	11.6	11.8	8.3	5.6	5.7	5.8	3.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2GC1F08HE EAN: 4069025225399	LP number 58294_567
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	0.3	0.3
2,5°	212.0	213.1	214.4	216.5	219.1	220.0	220.3	220.4	221.1	221.3	220.8	2.5	2.8
5,0°	207.3	208.6	210.0	212.4	215.2	220.1	224.3	228.1	230.5	232.3	231.7	5.0	7.8
7,5°	207.1	207.6	207.9	208.0	210.6	214.3	217.8	219.4	220.6	222.9	222.3	7.6	15.4
10,0°	201.9	197.4	196.1	197.8	200.7	203.1	205.8	209.1	213.9	215.2	215.6	10.1	25.6
12,5°	188.7	186.8	187.2	188.9	189.0	192.0	194.9	202.2	202.9	199.9	198.5	12.7	38.2
15,0°	163.2	166.1	166.8	168.0	167.6	169.0	171.8	175.5	177.6	177.5	174.3	14.5	52.7
17,5°	142.4	145.3	148.6	146.6	142.2	141.3	142.5	140.5	139.6	141.9	145.2	15.7	68.4
20,0°	132.1	133.9	136.1	131.7	126.2	120.3	118.7	117.2	119.3	123.0	123.6	17.1	85.4
22,5°	121.6	123.3	127.5	122.6	117.2	111.3	108.1	104.4	104.1	105.1	108.4	18.6	104.0
25,0°	116.4	116.4	122.3	114.9	111.8	108.8	104.8	99.9	98.0	96.3	97.5	20.4	124.4
27,5°	113.5	110.4	106.0	104.2	104.7	100.3	99.3	95.7	92.3	93.2	93.9	22.8	147.2
30,0°	118.2	110.9	106.7	103.5	94.1	91.0	88.4	87.2	88.7	89.6	89.4	25.8	173.0
32,5°	121.5	114.0	109.5	100.2	88.8	83.6	80.0	80.0	84.3	86.3	87.0	28.8	201.9
35,0°	128.0	116.1	107.5	90.6	81.0	75.6	72.2	73.3	78.1	83.0	82.8	32.7	234.6
37,5°	127.5	116.2	104.9	90.3	73.2	71.2	67.5	68.7	74.1	79.7	80.7	36.1	270.7
40,0°	131.4	114.2	99.6	87.6	68.0	64.4	63.9	66.0	70.0	75.2	75.7	39.6	310.3
42,5°	134.7	114.2	96.0	77.4	69.2	62.4	60.4	61.5	65.2	69.3	72.3	43.1	353.4
45,0°	137.7	114.0	90.2	69.6	65.6	62.2	54.8	55.1	57.7	63.4	67.4	46.5	400.0
47,5°	135.7	108.6	82.1	66.4	62.0	58.8	49.4	45.7	48.7	56.3	60.7	49.4	449.4
50,0°	128.4	106.2	77.5	63.1	56.8	52.0	46.1	38.7	40.5	45.7	47.2	51.3	500.6
52,5°	126.2	101.8	73.6	57.3	47.5	43.0	38.5	34.1	34.3	36.5	39.1	52.3	552.9
55,0°	121.3	90.9	64.3	50.8	40.1	35.5	32.1	28.8	29.1	29.6	33.2	53.2	606.0
57,5°	113.2	77.9	54.8	44.2	35.4	30.0	28.4	26.1	26.1	26.7	28.2	52.6	658.6
60,0°	105.8	72.5	47.5	38.0	29.4	26.0	25.2	23.4	23.3	23.8	24.7	51.0	709.6
62,5°	92.5	67.2	45.6	30.4	23.1	21.1	21.2	20.4	20.0	20.6	19.9	49.0	758.6
65,0°	79.4	59.7	44.2	23.4	17.5	17.2	17.8	16.9	17.4	17.0	16.6	46.9	805.5
67,5°	69.4	52.0	33.4	16.8	12.4	12.9	14.2	13.4	14.0	14.0	13.3	44.2	849.8
70,0°	61.2	45.1	26.0	12.9	9.9	9.5	10.2	10.0	10.9	11.8	11.2	41.0	890.8
72,5°	54.5	37.0	17.5	9.7	7.6	7.4	7.3	7.4	7.9	9.1	8.6	35.2	926.1
75,0°	37.2	22.5	10.7	7.7	6.2	6.0	5.5	5.7	5.5	6.1	6.1	28.7	954.8
77,5°	24.6	13.7	8.0	6.1	4.8	4.3	4.0	3.9	3.0	2.8	2.6	20.1	974.8
80,0°	17.5	8.2	5.8	4.7	3.7	3.1	2.8	2.2	1.3	0.9	0.7	13.3	988.1
82,5°	13.4	6.6	4.4	3.5	2.9	2.2	1.8	1.6	0.9	0.4	0.5	7.7	995.8
85,0°	6.1	3.6	3.0	2.3	2.0	1.6	1.0	0.8	0.6	0.3	0.3	3.1	998.9
87,5°	2.8	2.2	1.6	1.3	1.1	0.9	0.7	0.6	0.4	0.3	0.3	1.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2GC1F08HE EAN: 4069025225399	LP number 58294_567
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	8600	61.0	64.3	62.6
95	241	252	8160	57.1	60.2	58.6
90	229	250	7754	53.7	56.4	55.0
85	216	248	7313	50.1	52.6	51.4
80	203	246	6873	46.6	48.9	47.8
75	190	243	6433	43.2	45.3	44.2
70	178	241	6027	40.2	42.1	41.2
65	165	238	5587	36.9	38.8	37.8
60	152	235	5146	33.8	35.4	34.6
55	140	232	4740	31.0	32.4	31.7
50	127	229	4300	28.1	29.3	28.7
45	114	225	3860	25.1	26.3	25.7
40	102	221	3454	22.6	23.6	23.1
35	89	216	3013	19.8	20.6	20.2
30	76	210	2573	17.2	17.9	17.5
25	63	203	2133	14.6	15.2	14.9
20	51	195	1727	12.3	12.8	12.6
15	38	184	1287	9.9	10.2	10.0
10	25	169	846	7.5	7.7	7.6
9	22	164	745	6.7	7.0	6.8