

Photometric test report

Family Streetlight 21 mini LED



Order number: 5XE2V33R08JB
EAN: 4069025150509

LP number
59540_536

Version	post-top or side-entry mounting, Smart Interface down
Optic	asymmetric, extremely wide distribution (P0.5a G)
Cover	toughened safety glass
Lamps	LED 3000 K CRI ≥ 70
Controlgear	EVG-Smart Interface
Rated values	Net luminous flux = 12720 lm Power consumption = 88.6 W Luminous efficacy = 143.6 lm/W

serial
documentation
22.10.2024

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 308 cd/klm

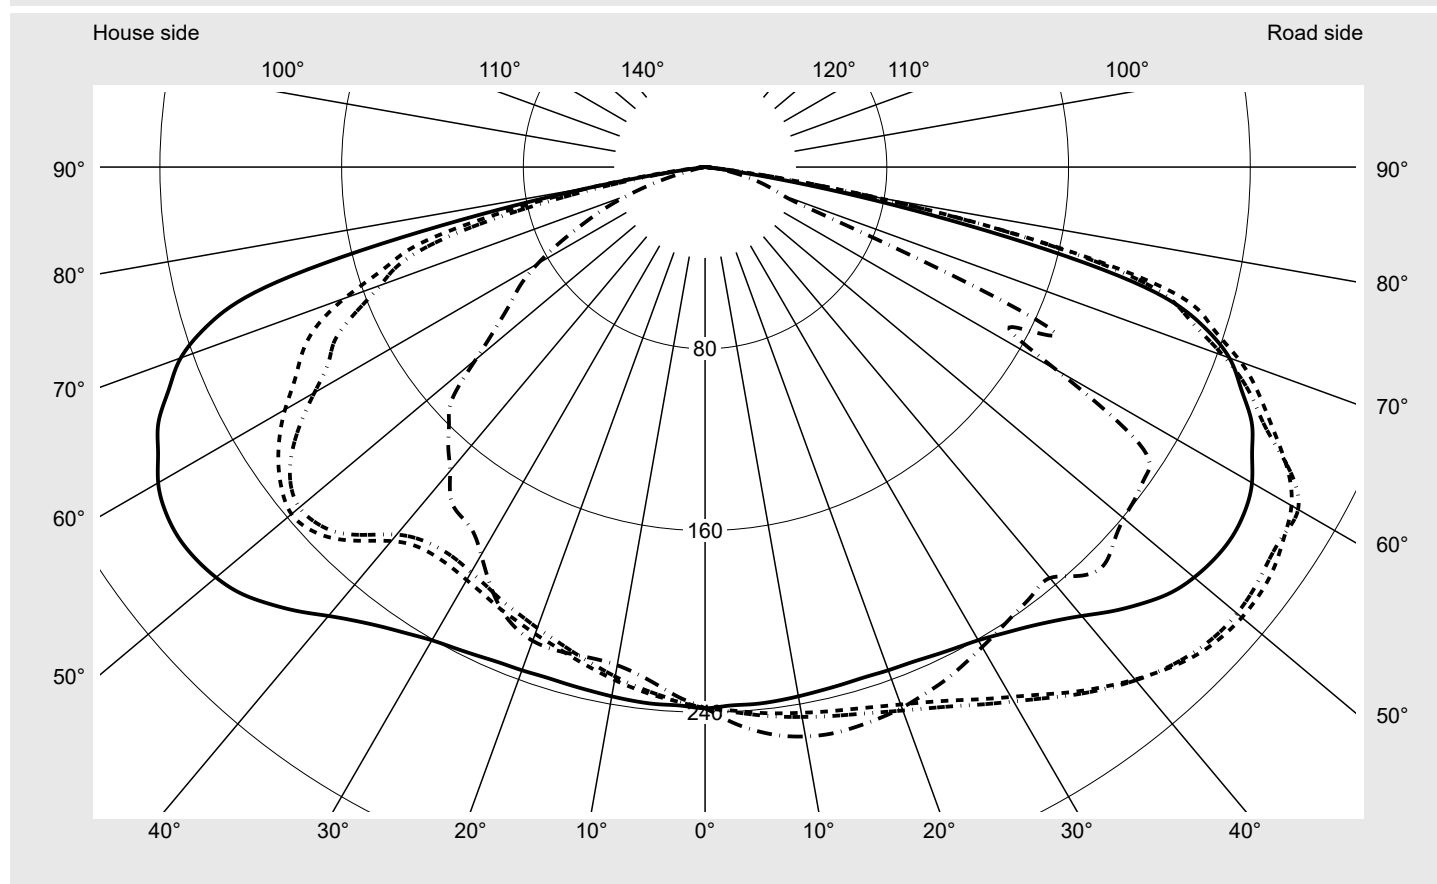

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G6
Imax 70°	256.5
Imax 80°	74.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
Envelope curve in cd/klm KMK 50° KMK 47.5° KMK 45° KMK 42.5°		sit eco

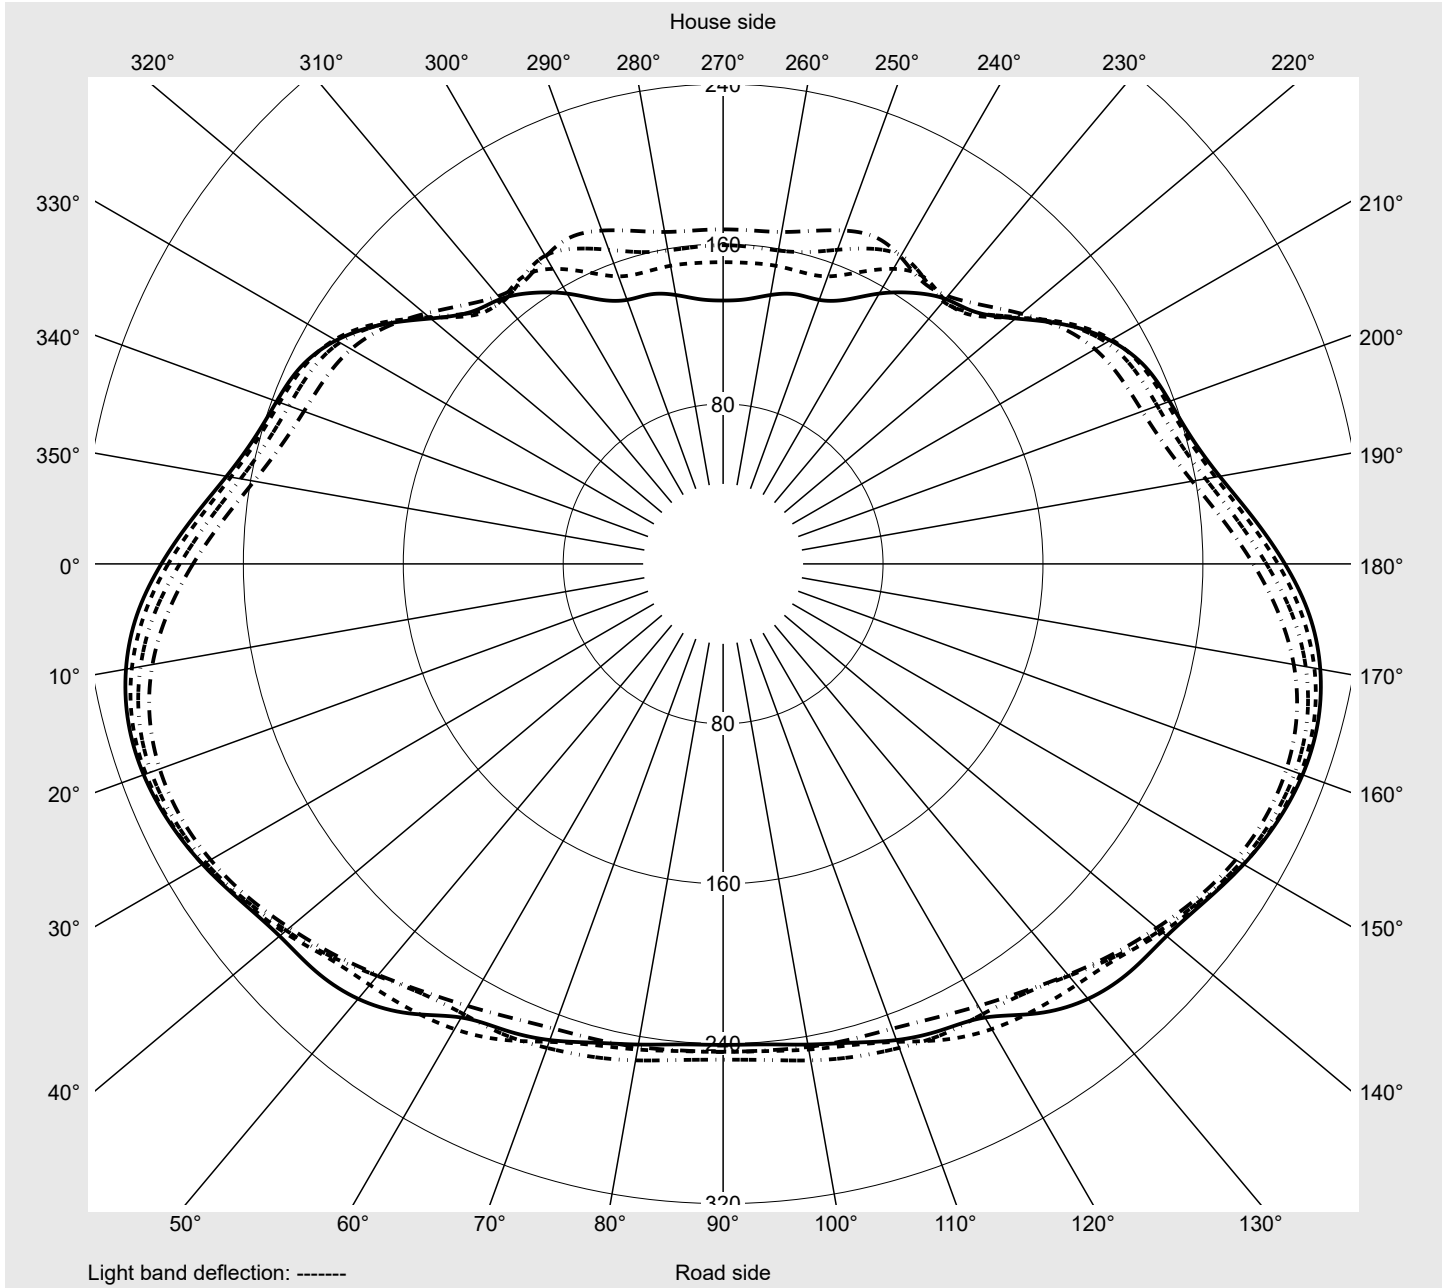

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	237.3	237.5	238.1	238.8	239.3	239.9	240.2	240.7	241.5	241.7	242.0	242.5	242.9
5,0°	237.4	238.0	238.8	239.9	241.0	241.9	242.7	243.5	244.6	245.2	245.8	246.5	247.1
7,5°	237.1	238.2	239.5	241.0	242.5	244.0	245.1	246.2	247.5	248.4	249.3	250.0	250.6
10,0°	236.6	238.2	239.9	241.9	243.9	245.8	247.4	248.6	250.0	251.1	252.0	252.6	253.2
12,5°	236.0	238.3	240.4	243.0	245.5	247.6	249.4	250.9	252.2	253.3	254.1	254.7	255.0
15,0°	235.6	238.5	241.1	244.2	247.1	249.5	251.5	253.1	254.1	255.1	255.8	256.2	256.2
17,5°	235.3	239.0	242.1	245.7	249.2	251.8	253.9	255.5	256.4	257.0	257.4	257.2	256.9
20,0°	235.7	240.1	243.9	248.0	251.8	254.6	256.7	258.1	258.5	258.7	258.6	258.0	257.4
22,5°	236.2	241.5	246.0	250.8	255.0	257.8	259.6	260.5	260.4	260.0	259.4	258.4	257.3
25,0°	237.3	243.5	248.9	254.5	259.0	261.8	262.9	262.9	262.2	261.3	260.2	258.6	257.0
27,5°	238.7	246.0	252.9	259.4	264.0	266.6	267.1	266.4	264.7	262.7	260.7	258.6	256.6
30,0°	240.5	249.4	257.8	264.7	269.3	271.6	271.4	269.9	267.6	264.6	261.5	258.8	256.5
32,5°	243.5	253.9	263.5	270.7	275.3	277.3	276.5	274.3	270.9	266.8	262.8	259.6	256.7
35,0°	247.2	259.5	270.1	277.6	282.1	283.6	282.1	279.0	274.6	269.3	264.8	260.4	256.5
37,5°	251.9	265.3	276.5	284.1	288.4	289.4	287.5	283.6	277.9	271.9	266.1	260.9	256.4
40,0°	257.9	272.0	283.3	290.8	294.5	294.9	292.3	287.5	280.9	274.1	267.3	261.3	255.9
42,5°	265.2	278.8	289.9	297.0	299.9	299.5	296.1	290.4	283.2	275.9	268.4	261.2	255.4
45,0°	271.8	285.6	295.9	302.4	304.5	303.0	298.9	292.4	285.3	277.6	269.0	262.5	260.0
47,5°	277.6	290.6	300.3	305.9	307.3	305.1	300.6	293.5	286.7	279.0	274.9	272.2	268.7
50,0°	281.0	294.4	303.3	308.0	308.5	305.7	300.6	294.3	289.6	288.2	284.0	274.4	262.0
52,5°	282.9	296.1	304.6	308.3	308.1	304.7	299.6	297.0	297.9	293.2	280.2	268.9	260.6
55,0°	283.4	296.4	304.5	307.4	306.1	302.7	301.1	302.7	299.0	287.3	277.3	263.0	250.2
57,5°	281.8	294.2	302.3	304.6	302.4	301.8	305.3	302.8	291.1	282.3	265.6	251.7	240.8
60,0°	278.0	289.6	297.4	299.9	298.1	301.4	306.7	298.1	285.4	267.5	252.7	240.4	231.1
62,5°	271.5	282.8	289.9	292.5	289.2	290.5	292.2	289.3	274.8	251.5	238.4	226.6	217.3
65,0°	265.5	275.5	281.2	283.0	276.6	272.6	272.7	269.1	253.6	232.0	217.9	208.5	203.1
67,5°	255.5	265.6	270.2	271.0	264.5	259.5	258.9	247.4	230.6	208.1	193.8	187.1	185.3
70,0°	245.6	253.4	256.5	255.8	251.0	242.8	232.3	218.1	200.6	183.2	168.1	164.4	158.1
72,5°	228.5	234.6	236.2	235.1	233.9	223.7	206.6	186.8	169.6	156.3	143.4	138.9	120.8
75,0°	194.7	195.1	199.0	209.9	213.2	203.6	180.2	156.3	139.6	128.8	118.9	109.7	86.9
77,5°	118.9	121.4	127.9	140.9	149.5	148.0	139.4	124.1	109.0	97.7	88.2	79.3	61.2
80,0°	48.4	49.8	59.9	70.1	74.5	72.8	73.8	68.2	62.2	64.4	61.2	53.2	40.3
82,5°	5.9	5.6	6.9	11.1	15.0	19.9	24.6	26.8	29.1	29.4	28.1	28.6	21.9
85,0°	2.4	2.3	2.3	2.3	2.2	2.2	2.1	2.8	5.0	6.4	7.9	7.6	6.5
87,5°	1.3	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2
2,5°	243.1	243.3	243.5	243.7	244.0	244.1	237.0	236.3	236.1	236.0	235.7	235.4	235.1
5,0°	247.5	247.7	248.2	248.5	248.7	248.9	236.4	235.2	234.6	234.0	233.2	232.7	232.1
7,5°	251.1	251.3	251.7	252.1	252.3	252.4	235.6	234.0	232.8	231.8	230.6	229.8	228.8
10,0°	253.6	253.7	254.0	254.3	254.5	254.5	234.4	232.3	230.7	229.3	227.7	226.4	225.4
12,5°	255.2	255.1	255.2	255.4	255.5	255.5	233.2	230.5	228.3	226.5	224.5	223.1	222.0
15,0°	256.0	255.7	255.5	255.5	255.3	255.2	232.0	228.8	226.1	223.7	221.5	220.0	218.8
17,5°	256.4	255.7	255.2	254.9	254.6	254.5	231.1	227.2	224.0	221.0	218.5	216.8	215.8
20,0°	256.4	255.4	254.5	253.9	253.5	253.3	230.6	226.1	222.2	218.7	215.9	214.1	213.2
22,5°	256.1	254.8	253.4	252.3	251.7	251.4	230.4	225.2	220.5	216.3	213.3	211.4	210.7
25,0°	255.5	253.9	252.2	250.6	249.8	249.4	230.5	224.3	218.9	214.2	210.9	208.9	208.1
27,5°	254.6	252.6	250.7	248.6	247.2	246.8	230.6	223.7	217.2	211.8	208.1	206.1	205.4
30,0°	254.1	251.5	248.9	246.5	244.5	244.0	231.7	223.3	215.8	209.9	206.0	203.9	203.6
32,5°	253.8	250.5	247.2	244.2	242.0	241.4	233.2	223.4	215.0	208.6	204.5	202.8	202.8
35,0°	253.1	249.3	245.3	242.1	239.8	239.0	235.9	224.7	215.1	208.4	204.6	203.2	203.1
37,5°	252.2	248.0	243.9	240.6	237.9	237.1	239.1	226.9	216.7	210.0	206.5	204.9	203.8
40,0°	251.1	246.5	242.5	239.3	236.9	236.2	244.5	231.5	221.4	214.9	211.2	208.5	204.5
42,5°	250.6	247.4	246.2	245.4	244.3	244.1	251.0	238.3	228.9	223.2	219.6	214.8	206.2
45,0°	259.7	257.6	255.2	252.2	249.1	248.0	257.8	245.1	236.2	231.1	227.7	221.4	208.7
47,5°	262.6	254.5	249.2	246.7	244.6	244.1	262.9	250.1	241.1	236.1	232.0	224.4	210.0
50,0°	257.5	253.5	248.0	244.1	241.3	240.6	266.1	252.3	242.8	237.7	233.1	223.6	208.6
52,5°	251.2	244.9	242.1	240.7	239.3	238.9	266.9	251.8	241.0	234.6	229.9	219.4	203.8
55,0°	243.2	238.5	237.3	237.6	236.9	236.9	267.2	250.9	238.0	229.3	222.4	210.0	194.8
57,5°	234.8	231.1	231.4	231.5	228.4	226.6	265.9	248.8	234.0	222.2	211.5	194.5	178.5
60,0°	224.0	222.1	219.2	203.5	185.6	178.7	262.4	244.0	227.9	213.5	198.5	177.2	155.0
62,5°	211.1	203.0	179.8	157.1	151.1	152.4	255.7	235.9	219.2	203.8	187.0	161.9	138.0
65,0°	192.2	167.0	147.6	160.8	169.6	166.4	248.1	226.8	210.5	196.1	179.7	152.0	125.4
67,5°	160.4	132.9	139.7	112.6	79.6	70.0	238.5	217.0	201.7	186.0	166.0	137.5	102.2
70,0°	124.2	113.5	80.1	43.1	37.5	36.7	228.2	207.7	189.6	168.8	152.1	121.0	79.1
72,5°	94.2	70.4	34.4	31.3	30.3	30.0	213.8	196.5	166.3	147.8	140.2	97.8	60.8
75,0°	68.8	33.0	24.9	24.6	23.8	23.5	185.0	166.1	133.3	129.6	114.8	74.9	40.4
77,5°	42.1	18.9	17.8	17.5	16.7	16.4	125.5	104.8	84.8	89.9	72.8	40.0	22.4
80,0°	20.7	11.7	11.4	10.9	10.4	10.2	49.6	44.0	43.6	48.4	32.4	14.5	12.4
82,5°	9.2	6.5	6.2	6.1	5.7	5.6	6.8	6.4	10.9	13.5	8.3	5.6	5.7
85,0°	2.9	2.5	2.5	2.4	2.3	2.2	2.4	2.4	2.4	2.4	2.3	2.2	2.1
87,5°	0.9	0.8	0.9	0.8	0.8	0.8	1.3	1.3	1.3	1.3	1.3	1.3	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	238.2	0.4	0.4
2,5°	234.8	234.7	234.6	234.3	234.3	234.4	234.5	234.3	234.3	234.2	234.2	2.8	3.2
5,0°	231.3	231.0	230.6	230.1	229.9	229.8	229.7	229.6	229.4	229.4	229.4	5.7	8.9
7,5°	227.9	227.2	226.7	226.2	225.8	225.7	225.5	225.3	225.2	225.3	225.3	8.5	17.4
10,0°	224.2	223.7	223.2	222.7	222.5	222.5	222.4	222.4	222.5	222.6	222.7	11.3	28.7
12,5°	220.9	220.4	220.2	220.2	220.3	220.5	220.8	221.1	221.4	221.7	221.9	14.1	42.8
15,0°	218.0	217.8	218.1	218.5	219.1	219.7	220.3	220.9	221.6	222.0	222.2	16.8	59.6
17,5°	215.5	215.7	216.3	217.2	218.2	219.2	220.1	221.0	221.9	222.4	222.6	19.5	79.1
20,0°	213.3	213.9	214.9	216.1	217.4	218.4	219.3	220.3	221.1	221.7	221.9	22.2	101.2
22,5°	211.0	211.7	213.0	214.3	215.5	216.4	217.1	217.7	218.3	218.9	219.1	24.7	125.9
25,0°	208.4	209.5	210.8	212.0	212.8	213.1	213.1	213.0	213.1	213.4	213.7	27.2	153.2
27,5°	206.1	207.2	208.3	208.7	208.3	207.6	206.7	206.2	205.8	205.7	205.9	29.6	182.8
30,0°	204.5	205.4	205.3	204.4	202.8	200.8	199.0	197.7	197.2	196.9	197.1	31.9	214.7
32,5°	203.4	203.2	201.5	198.8	195.6	192.4	190.2	189.2	189.2	189.8	190.2	34.2	248.8
35,0°	202.5	199.9	195.9	191.3	186.9	183.7	183.2	184.2	185.8	187.0	187.5	36.4	285.3
37,5°	200.6	195.5	189.2	183.4	179.5	178.6	181.2	183.8	184.5	184.1	183.9	38.8	324.0
40,0°	198.0	189.6	181.5	176.2	175.6	179.2	182.3	180.9	177.6	175.3	174.7	41.1	365.1
42,5°	194.7	183.2	174.9	172.9	177.5	180.3	177.4	172.5	168.6	167.4	167.3	43.5	408.6
45,0°	192.0	177.6	171.3	174.8	178.0	174.0	167.2	161.5	159.2	159.1	159.4	45.9	454.5
47,5°	191.5	176.0	172.4	175.1	170.4	161.0	153.1	151.1	151.4	151.1	150.9	47.9	502.4
50,0°	191.0	178.3	173.0	165.5	156.1	145.9	140.5	139.6	136.6	132.9	131.7	49.3	551.6
52,5°	188.5	178.4	165.3	151.1	137.1	128.7	128.3	125.6	119.8	116.5	116.0	50.0	601.7
55,0°	180.5	166.4	147.4	130.9	119.3	117.7	116.1	110.0	105.8	104.4	104.7	50.3	651.9
57,5°	160.7	141.9	126.3	112.6	107.9	108.0	101.5	97.5	96.5	95.8	96.2	49.8	701.7
60,0°	137.1	120.9	107.9	100.7	100.2	95.4	88.5	86.8	86.3	85.0	85.1	48.3	750.0
62,5°	120.2	105.6	96.5	93.8	89.2	80.7	76.1	75.2	74.5	72.5	72.3	46.0	796.0
65,0°	103.2	92.1	87.2	82.7	74.1	66.9	63.7	62.8	63.5	59.8	59.3	43.9	839.8
67,5°	79.9	73.1	69.4	64.1	58.1	54.4	51.9	51.9	53.0	49.0	48.0	39.6	879.5
70,0°	59.9	55.4	52.2	49.6	47.6	45.3	41.9	41.0	41.2	36.5	35.7	34.9	914.4
72,5°	44.5	42.2	40.2	39.5	38.4	35.2	31.1	29.9	28.7	24.4	23.5	30.4	944.8
75,0°	32.9	31.4	31.0	30.7	29.2	25.4	20.6	18.2	15.7	12.8	12.1	25.2	969.9
77,5°	22.0	21.6	20.9	19.9	17.6	14.7	11.7	9.7	7.7	5.2	5.0	17.3	987.2
80,0°	11.8	11.1	10.5	9.8	8.8	7.5	6.0	4.8	3.6	2.0	1.8	8.9	996.1
82,5°	5.5	5.1	4.9	4.6	4.3	3.7	3.0	2.4	1.8	1.1	1.0	2.9	999.0
85,0°	2.0	1.9	1.9	1.8	1.6	1.4	1.2	1.1	0.9	0.8	0.7	0.7	999.7
87,5°	1.1	1.1	1.0	0.9	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
Dimming levels table		environmental temperature: 25°C
		sitEco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12720	88.6	91.7	90.2
95	239	252	12084	83.1	86.0	84.6
90	224	249	11442	77.7	80.4	79.1
85	210	247	10830	72.6	75.1	73.8
80	195	244	10163	67.4	69.5	68.4
75	181	242	9520	62.7	64.7	63.7
70	168	239	8910	58.4	60.3	59.4
65	154	236	8245	53.7	55.4	54.6
60	141	232	7618	49.2	50.9	50.0
55	128	229	6976	44.8	46.3	45.6
50	116	225	6373	40.6	42.0	41.3
45	103	221	5711	36.1	37.3	36.7
40	91	216	5090	32.2	33.2	32.7
35	79	211	4458	28.3	29.1	28.7
30	67	205	3818	24.3	25.0	24.6
25	55	198	3168	20.3	20.9	20.6
20	44	190	2565	16.5	17.0	16.8
15	32	178	1898	12.1	12.5	12.3
14	31	177	1841	11.8	12.1	12.0

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13070	89.7	92.8	91.2
95	239	252	12403	84.2	87.1	85.6
90	225	250	11775	79.0	81.8	80.4
85	210	247	11088	73.5	76.1	74.8
80	196	245	10439	68.7	70.8	69.8
75	183	242	9820	64.3	66.3	65.3
70	169	239	9141	59.5	61.5	60.5
65	156	236	8504	55.1	56.9	56.0
60	143	233	7858	50.6	52.2	51.4
55	130	229	7200	46.1	47.6	46.8
50	117	226	6531	41.6	43.0	42.3
45	105	222	5906	37.4	38.6	38.0
40	92	217	5219	33.0	34.0	33.5
35	80	212	4576	29.0	29.9	29.4
30	68	206	3924	25.0	25.8	25.4
25	56	199	3264	20.9	21.6	21.2
20	44	190	2595	16.8	17.3	17.0
15	33	179	1975	12.8	13.2	13.0
14	31	177	1862	12.0	12.4	12.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
Dimming levels table		environmental temperature: 15°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12910	89.1	92.2	90.6
95	239	252	12258	83.6	86.5	85.0
90	224	249	11598	78.2	80.9	79.6
85	210	247	10971	73.1	75.6	74.4
80	196	245	10335	68.2	70.3	69.2
75	182	242	9679	63.6	65.5	64.6
70	169	239	9058	59.1	61.1	60.1
65	155	236	8382	54.4	56.1	55.2
60	142	233	7745	49.9	51.5	50.7
55	129	229	7095	45.4	47.0	46.2
50	116	225	6432	40.9	42.3	41.6
45	104	221	5814	36.8	38.0	37.4
40	92	217	5186	32.7	33.8	33.2
35	79	211	4494	28.5	29.3	28.9
30	67	205	3847	24.5	25.2	24.8
25	56	199	3246	20.8	21.4	21.1
20	44	190	2583	16.7	17.2	17.0
15	32	178	1910	12.2	12.6	12.4
14	31	177	1853	11.9	12.2	12.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2V33R08JB EAN: 4069025150509	LP number 59540_536
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	12720.0	88.6
5.0	13070.0	89.7
15.0	12910.0	89.1