

Photometric test report

Family
Streetlight 11 micro LED



Order number: 5XC1B51E08CE
EAN: 4058352583371

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting

asymmetric, extremely wide distribution (ST0.5a)

transparent, PMMA

LED 3000 K | CRI ≥ 70


ECG SITECO iQ

Net luminous flux = 1860 lm
Power consumption = 12.6 W
Luminous efficacy = 147.6 lm/W

LP number
59318_225

serial
documentation
14.02.2025

siteco

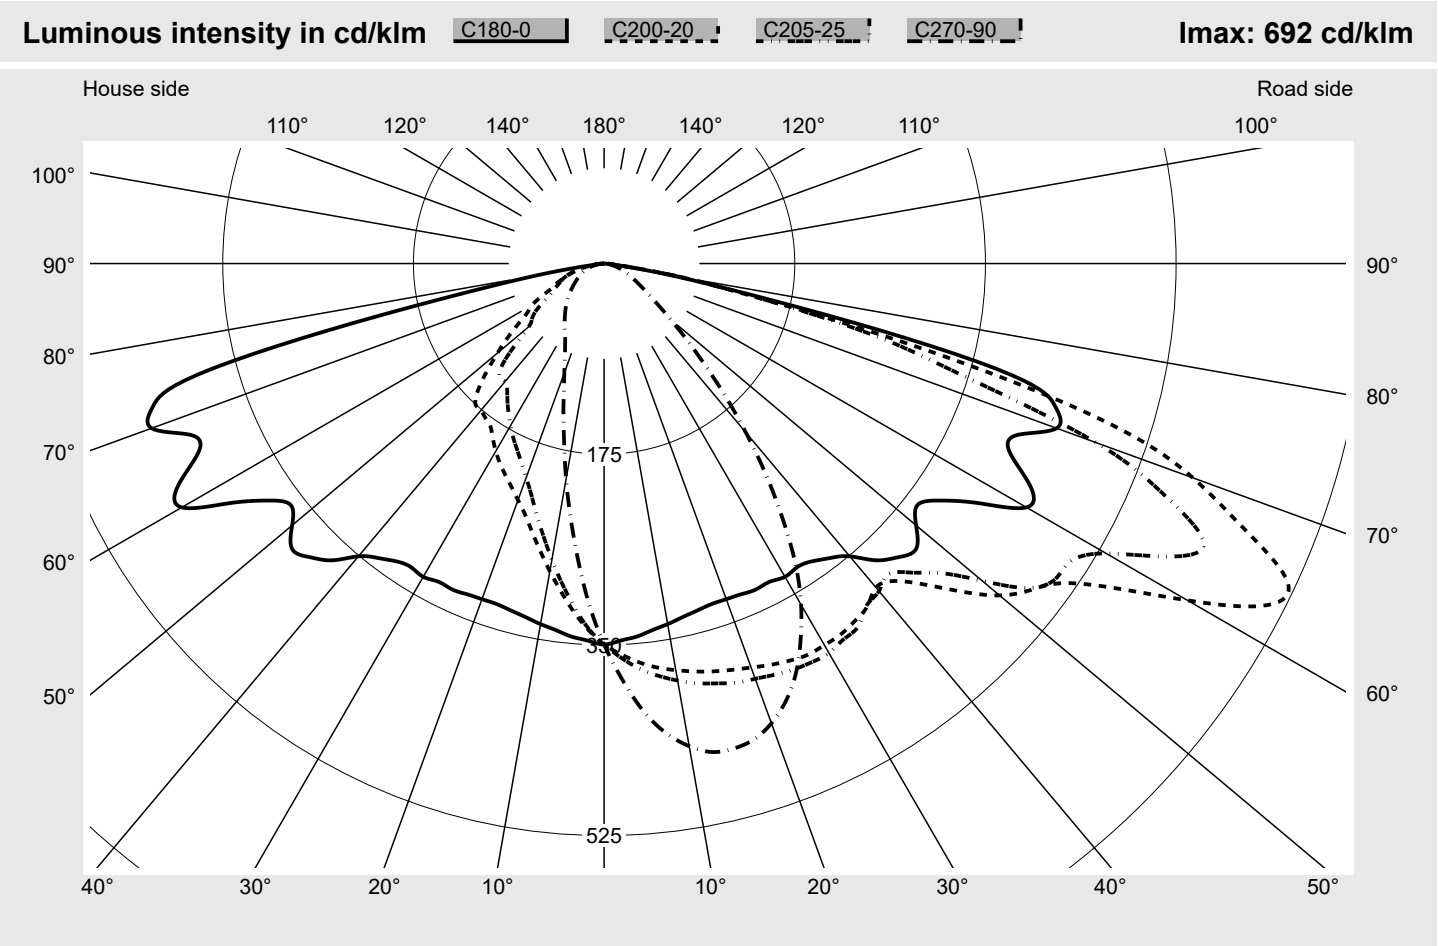

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	625.9
Eta 90° - 180°	0.0%	Imax 80°	83.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Streetlight 11 micro LED

Order number: **5XC1B51E08CE**
EAN: **4058352583371**

LP number
59318_225

Envelope curve in cd/klm


KMK 65°

KMK 62,5°

KMK 60°

KMK 57,5°

siteco

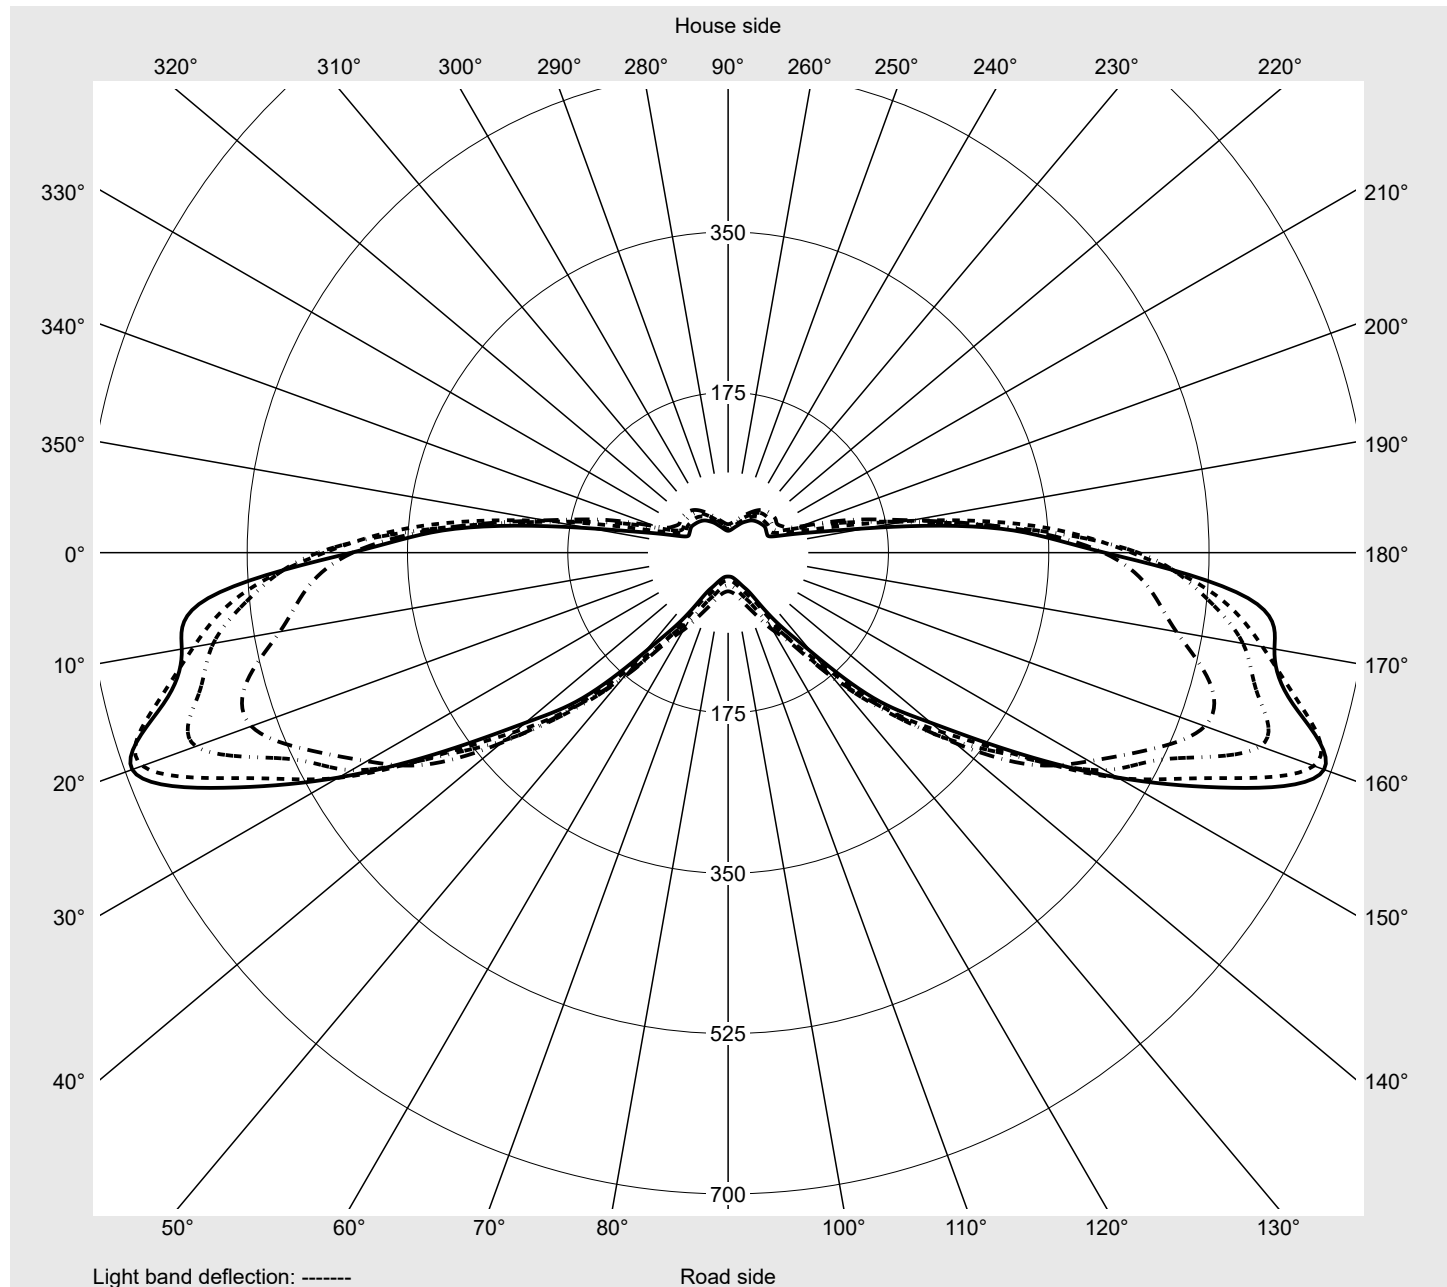

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B51E08CE EAN: 4058352583371	LP number 59318_225
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	346.4	349.6	352.5	355.6	359.1	362.3	365.7	368.3	370.4	373.0	374.6	376.5	377.7
5,0°	343.7	349.5	355.4	361.4	367.3	373.2	379.3	384.2	389.4	393.9	397.5	401.2	403.7
7,5°	339.3	347.9	356.6	365.3	374.0	381.6	389.6	396.7	403.5	409.5	414.5	419.1	422.7
10,0°	336.1	347.6	358.5	368.8	378.9	388.6	397.8	406.7	414.0	421.1	427.2	432.1	436.4
12,5°	332.4	346.9	360.1	372.2	383.5	394.6	404.7	413.6	421.9	429.5	436.0	441.3	445.3
15,0°	329.7	346.1	361.1	375.1	387.5	398.9	409.1	418.6	426.9	434.3	439.8	445.0	448.5
17,5°	327.7	346.6	363.6	378.2	391.0	403.2	413.0	422.0	429.0	435.9	440.7	444.1	447.4
20,0°	327.8	348.5	366.7	382.0	394.6	405.6	414.5	422.7	429.0	434.0	437.7	440.1	442.2
22,5°	328.6	351.4	371.1	386.5	398.7	408.5	416.3	422.4	426.4	429.5	431.1	432.2	432.2
25,0°	330.0	353.9	374.6	390.4	402.2	411.2	417.2	421.5	422.5	422.4	421.0	419.7	417.9
27,5°	329.2	355.3	376.7	393.2	404.8	412.6	417.4	418.9	416.6	412.7	408.4	403.2	398.9
30,0°	332.0	357.6	377.2	392.6	404.4	412.7	415.4	414.5	410.0	402.0	393.4	384.1	376.1
32,5°	330.3	355.7	377.8	395.1	403.8	409.0	411.6	407.9	400.0	388.7	376.1	362.7	350.9
35,0°	333.5	360.4	379.2	389.4	400.8	406.6	403.3	397.8	387.0	372.6	356.3	339.2	323.1
37,5°	340.7	359.0	375.7	391.6	396.7	395.7	397.0	383.6	370.6	353.8	334.5	314.1	294.9
40,0°	350.8	370.9	384.9	388.1	388.2	392.5	380.4	371.0	349.7	331.8	310.7	288.4	266.5
42,5°	369.4	382.5	392.4	395.9	395.2	386.4	375.9	352.4	330.3	306.0	284.3	261.6	238.7
45,0°	381.3	398.3	412.4	414.5	416.8	401.2	377.6	347.0	317.0	285.5	257.2	233.4	210.0
47,5°	388.2	413.4	432.8	440.7	445.8	420.7	394.8	353.5	305.8	272.4	237.0	205.3	183.3
50,0°	373.8	408.9	441.6	467.0	473.9	452.9	419.2	363.7	305.3	257.9	216.6	184.5	157.1
52,5°	363.2	400.3	450.6	489.7	492.6	489.2	445.0	382.0	306.8	245.3	196.9	157.3	132.9
55,0°	379.3	415.1	461.7	514.1	511.6	505.2	458.8	398.4	321.4	242.5	179.1	137.3	111.7
57,5°	409.8	462.5	496.9	543.9	553.9	508.2	455.3	403.4	323.0	240.0	177.8	122.2	97.4
60,0°	447.6	519.5	570.7	598.5	618.2	532.1	474.8	389.0	318.7	246.0	178.2	113.8	87.8
62,5°	440.6	534.6	592.5	647.7	680.4	582.3	491.8	384.6	304.7	237.6	160.7	112.9	67.2
65,0°	411.0	569.8	605.6	638.3	692.3	607.3	490.8	377.8	288.9	224.2	142.0	93.7	56.6
67,5°	410.9	569.1	586.8	628.0	635.6	557.8	440.5	356.7	283.8	204.7	125.7	67.7	43.7
70,0°	442.0	555.6	565.8	625.9	575.2	480.6	332.4	279.2	238.2	183.8	113.9	57.6	34.9
72,5°	433.7	537.3	588.0	558.6	482.4	351.9	212.6	171.4	170.7	153.5	102.6	45.2	26.7
75,0°	371.4	397.9	481.8	383.0	304.1	260.7	173.2	132.3	98.5	83.5	58.2	32.8	18.6
77,5°	168.9	238.4	205.4	158.3	144.5	144.1	120.6	97.3	71.0	56.5	28.1	20.4	13.6
80,0°	63.8	83.0	54.2	76.5	72.1	71.7	61.2	43.7	28.6	19.3	16.8	14.2	9.8
82,5°	13.4	13.1	15.5	22.1	20.5	17.2	15.0	12.9	10.3	8.6	7.7	7.0	6.2
85,0°	7.9	8.1	8.4	8.4	8.1	7.7	7.0	6.4	5.8	5.3	4.7	4.0	3.3
87,5°	4.1	4.2	4.4	4.2	4.1	4.0	3.6	3.3	3.0	2.8	2.4	1.9	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B51E08CE EAN: 4058352583371	LP number 59318_225
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	378.5	379.5	380.4	381.6	382.0	382.2	343.5	340.8	338.4	336.3	335.0	333.4	330.8
5,0°	405.6	407.4	409.2	411.0	411.9	412.1	337.1	331.3	325.5	320.7	316.1	311.3	306.5
7,5°	426.4	428.9	431.5	433.3	434.7	434.5	330.2	320.5	311.6	303.5	296.0	288.5	281.2
10,0°	439.9	443.4	446.1	448.5	449.8	449.8	323.3	310.6	298.5	286.8	276.1	266.4	256.6
12,5°	448.6	452.5	455.2	457.1	458.7	459.2	316.4	300.7	285.1	270.4	256.6	244.2	231.6
15,0°	451.7	455.3	457.5	459.5	461.0	460.7	311.3	292.0	272.7	255.2	239.0	224.0	209.9
17,5°	450.3	452.8	454.8	456.7	457.1	457.9	306.5	284.1	262.2	241.4	222.3	205.1	189.3
20,0°	444.1	445.8	446.9	448.4	448.5	449.0	304.4	279.0	254.2	231.0	209.2	189.9	172.7
22,5°	432.7	432.5	433.5	434.7	434.4	435.2	302.9	275.4	248.1	222.0	198.2	176.9	158.3
25,0°	416.7	415.4	414.7	415.6	415.7	416.0	301.7	271.7	242.5	214.3	188.8	166.2	147.0
27,5°	394.7	392.9	391.0	391.0	390.6	390.5	299.3	267.4	236.6	206.9	180.4	156.7	137.0
30,0°	370.0	365.9	363.8	362.4	361.8	361.5	298.6	261.6	228.6	198.8	171.7	148.3	128.8
32,5°	341.3	335.2	331.9	329.8	327.5	326.9	295.4	254.6	220.6	190.1	163.1	140.1	121.1
35,0°	310.0	301.2	295.1	291.2	287.1	285.5	296.0	252.1	215.2	182.1	154.6	131.7	113.8
37,5°	279.0	266.9	258.3	251.9	246.0	243.8	303.4	259.2	214.6	178.8	146.2	123.6	107.4
40,0°	247.7	232.6	220.9	211.8	205.0	202.3	303.1	260.0	210.1	176.1	141.2	119.5	101.2
42,5°	218.0	200.1	185.7	174.6	167.0	163.9	311.3	266.6	211.9	174.8	141.3	110.8	96.1
45,0°	188.3	168.7	153.2	140.2	132.3	129.3	320.6	267.8	211.5	163.2	132.8	99.0	91.1
47,5°	161.2	142.1	125.7	112.4	104.3	101.6	313.5	249.2	197.2	145.5	110.9	92.7	85.6
50,0°	136.0	117.3	101.4	89.0	81.6	79.2	299.9	224.1	169.8	127.8	90.3	84.7	80.5
52,5°	114.2	96.1	81.3	70.5	64.7	62.9	283.5	206.5	150.4	111.3	83.4	77.6	75.0
55,0°	94.4	78.5	65.6	56.9	52.5	51.1	285.4	201.3	140.7	95.7	77.0	70.0	69.0
57,5°	77.4	63.2	53.1	46.6	43.4	42.2	309.7	203.3	138.1	83.2	67.0	62.1	63.3
60,0°	63.7	51.8	44.0	39.0	36.5	35.6	312.6	194.5	125.2	76.3	57.6	56.2	57.5
62,5°	51.3	42.4	36.4	32.5	30.9	30.3	335.4	199.0	100.5	63.9	52.2	52.2	52.9
65,0°	42.1	34.9	30.3	27.5	26.3	26.1	299.1	153.0	81.3	51.9	47.0	47.9	48.9
67,5°	34.0	28.3	24.9	23.1	22.2	22.0	270.2	117.3	69.3	46.7	43.4	43.6	43.7
70,0°	27.2	22.9	20.3	19.2	18.5	18.3	266.4	101.7	64.7	39.1	39.6	39.3	38.9
72,5°	20.3	18.0	16.4	15.6	15.1	15.0	222.7	100.6	48.5	33.1	35.0	35.1	34.5
75,0°	15.6	14.0	12.9	12.2	11.9	11.9	204.4	96.9	30.3	28.2	30.1	30.5	30.0
77,5°	11.9	10.4	9.8	9.0	8.6	8.4	131.9	42.0	20.5	21.9	24.3	25.2	25.6
80,0°	8.4	7.4	6.5	6.1	5.6	5.5	55.2	23.9	14.0	15.6	17.5	18.8	19.4
82,5°	5.5	4.6	4.0	3.6	3.4	3.2	11.0	9.2	8.7	9.3	10.2	11.4	12.6
85,0°	2.8	2.4	1.9	1.8	1.6	1.5	7.1	6.2	5.5	4.9	4.4	4.0	3.8
87,5°	1.2	0.9	0.8	0.6	0.5	0.5	3.9	3.5	3.1	2.9	2.6	2.4	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1B51E08CE EAN: 4058352583371										LP number 59318_225	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	0.5	0.5
2,5°	328.8	326.6	324.6	322.7	320.6	319.1	317.2	316.1	314.6	313.6	313.3	4.2	4.7
5,0°	301.9	297.4	293.1	289.4	285.6	282.2	279.6	277.4	275.4	274.0	273.4	8.2	12.9
7,5°	274.3	267.7	261.9	256.5	251.6	247.2	243.4	240.4	237.7	235.8	235.4	12.1	25.0
10,0°	247.0	238.5	231.2	224.7	219.1	214.1	209.7	206.2	203.2	201.2	200.9	15.7	40.7
12,5°	220.6	210.6	202.0	194.5	188.2	182.9	178.6	174.7	171.8	170.0	169.3	19.1	59.8
15,0°	197.1	185.7	176.4	168.6	162.0	156.7	152.5	148.9	146.3	144.8	144.3	22.2	81.9
17,5°	175.6	163.5	153.7	145.8	139.3	134.3	130.2	127.0	124.6	123.2	122.9	25.0	107.0
20,0°	158.0	145.7	135.8	127.9	122.0	117.0	113.4	110.5	108.5	107.3	106.8	27.7	134.7
22,5°	142.9	130.6	120.7	113.3	107.6	103.2	99.8	97.4	95.5	94.5	94.2	30.2	164.9
25,0°	131.2	118.8	109.5	102.2	97.0	93.1	90.0	87.8	86.1	85.0	84.7	32.4	197.3
27,5°	121.4	109.5	100.1	93.5	88.6	85.1	82.2	80.2	78.7	77.8	77.4	34.3	231.5
30,0°	113.4	101.5	93.2	87.3	82.7	79.3	76.8	74.6	73.1	72.4	72.0	35.8	267.3
32,5°	106.3	95.4	87.6	82.2	78.2	74.9	72.1	70.0	68.4	67.6	67.6	36.9	304.2
35,0°	100.3	90.3	83.4	78.4	74.5	71.0	68.3	65.8	64.1	63.1	63.1	37.6	341.9
37,5°	95.5	86.9	80.6	75.8	71.7	68.0	64.8	62.3	60.4	59.2	59.0	38.1	380.0
40,0°	91.6	84.2	78.6	73.7	69.3	65.2	61.7	58.8	56.8	55.6	55.2	38.3	418.3
42,5°	87.8	82.0	77.2	72.1	67.1	62.8	58.8	55.6	53.4	52.1	51.6	38.6	456.9
45,0°	84.7	80.0	75.6	70.3	65.2	60.2	55.7	52.4	50.0	48.7	48.1	39.1	495.9
47,5°	81.4	77.8	73.7	68.4	63.0	57.5	52.6	49.2	46.7	45.1	44.4	39.4	535.4
50,0°	77.9	74.8	71.1	66.1	60.5	54.8	49.7	45.7	43.0	41.3	40.7	39.5	574.8
52,5°	73.9	71.9	68.0	63.1	57.8	52.0	46.8	42.8	39.8	37.9	37.2	39.7	614.5
55,0°	68.9	67.8	64.6	59.9	54.8	48.9	44.0	39.9	37.0	35.0	34.1	40.5	655.0
57,5°	63.4	62.6	60.5	56.5	51.2	45.9	41.2	37.1	34.1	31.9	31.1	41.9	696.9
60,0°	58.0	57.4	56.2	52.7	47.5	42.6	38.2	34.5	31.4	29.3	28.6	44.1	741.0
62,5°	52.4	52.0	50.9	48.0	43.6	39.2	35.1	31.5	28.8	26.8	26.1	45.4	786.4
65,0°	48.1	46.8	45.2	42.9	39.3	35.9	32.0	28.9	26.3	24.6	23.9	44.7	831.2
67,5°	43.3	41.9	39.9	37.0	34.7	32.1	29.2	26.5	24.0	22.3	21.7	42.4	873.6
70,0°	38.3	36.8	35.1	32.0	30.0	28.4	26.5	24.0	21.7	20.1	19.5	39.3	912.9
72,5°	33.5	32.5	30.4	27.7	26.0	24.8	23.3	21.2	19.1	17.7	17.2	34.1	947.1
75,0°	29.2	28.2	26.5	24.1	22.3	20.8	19.7	18.0	16.2	14.8	14.5	26.1	973.2
77,5°	25.1	24.6	22.6	20.4	18.7	17.2	15.8	14.8	13.3	11.9	11.4	14.9	988.0
80,0°	19.5	20.1	18.9	16.7	15.2	13.7	12.4	11.1	9.8	8.6	8.2	7.2	995.3
82,5°	12.6	12.9	13.0	12.5	11.6	10.3	8.9	7.5	6.1	5.3	5.0	2.8	998.1
85,0°	3.9	4.4	5.0	5.6	5.6	5.5	4.8	3.7	2.9	2.4	2.2	1.3	999.4
87,5°	1.9	1.7	1.4	1.2	0.9	0.8	0.8	0.7	0.3	0.2	0.2	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B51E08CE EAN: 4058352583371	LP number 59318_225
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W] average
				start of lifetime	end of lifetime	
100	254	254	1860	12.6	12.9	12.8
95	241	252	1765	12.0	12.3	12.2
90	229	250	1677	11.4	11.7	11.6
85	216	248	1582	10.8	11.0	10.9
80	203	246	1487	10.1	10.4	10.2
75	190	243	1391	9.6	9.8	9.7
70	178	241	1303	9.0	9.2	9.1
65	165	238	1208	8.4	8.6	8.5
60	152	235	1113	7.8	8.0	7.9
55	140	232	1025	7.3	7.5	7.4
50	127	229	930	6.8	6.9	6.8
45	114	225	835	6.2	6.3	6.2
40	102	221	747	5.7	5.8	5.8
35	89	216	652	5.1	5.2	5.2
30	76	210	557	4.6	4.7	4.6
25	63	203	461	4.1	4.1	4.1
24	62	202	454	4.0	4.1	4.0