

Photometric test report

Family
Monsun® 12

Order number: **51FP20DP467H3H**
EAN: **4058352392379**

LP number
59060_50




Version	prismatic diffuser, opal, polycarbonate, wide distribution
Lamps	LED 4000 K CRI ≥ 80
Controlgear	ECG-DALI
Setting	emergency light operation: 3 h
Rated values	Net luminous flux = 790 lm Power consumption = 5.0 W Luminous efficacy = 158 lm/W

serial
documentation
10.05.2021

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: **319 cd/klm**

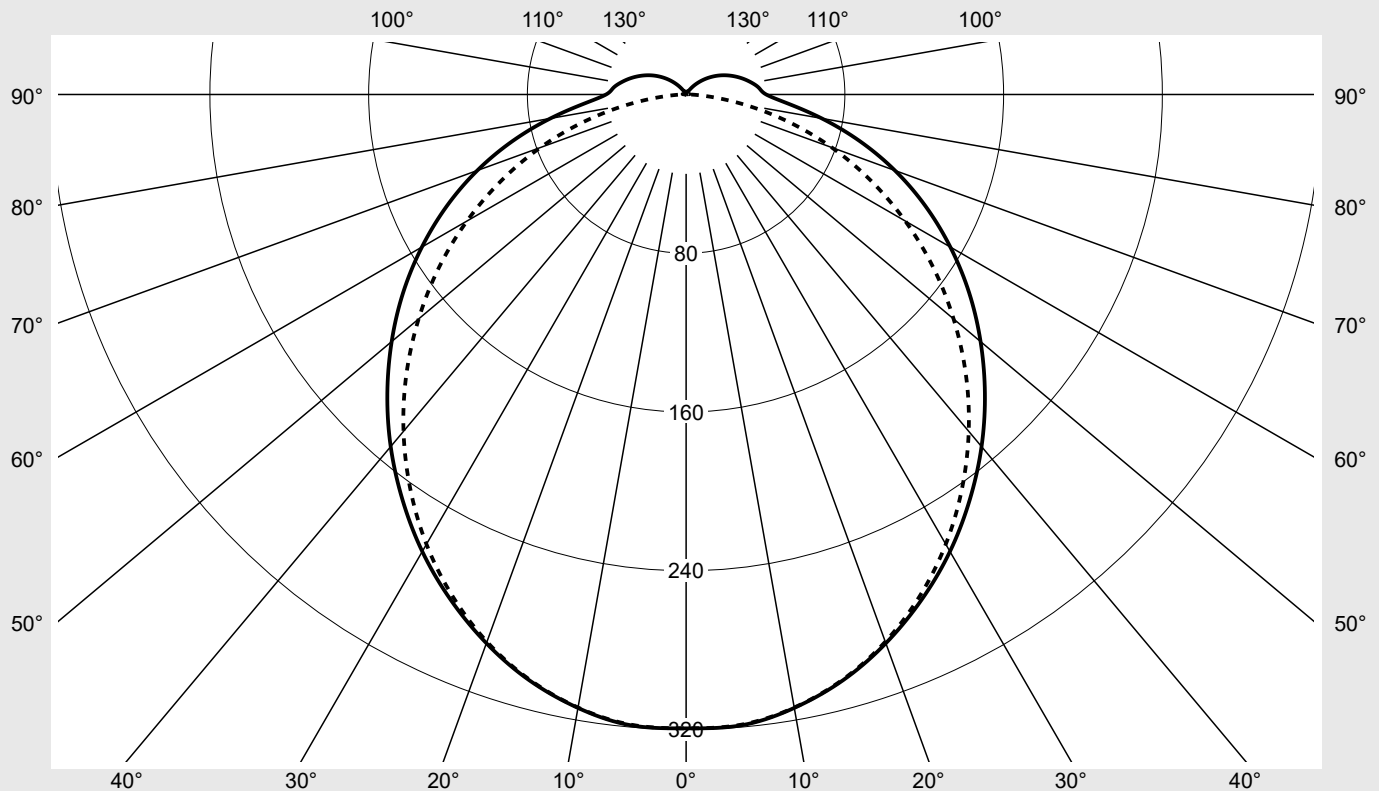

Classifications

DIN 5040 A 4 1
CIE N1=45 N2=75 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.7%
 ϕ_o 6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FP20DP467H3H EAN: 4058352392379	LP number 59060_50
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 12	Order number: 51FP20DP467H3H EAN: 4058352392379	LP number 59060_50
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.3	15.0	13.6	15.3	15.6	13.1	14.8	13.4	15.1	15.5
	3H	15.1	16.7	15.5	17.0	17.4	14.6	16.2	15.0	16.6	16.9
	4H	15.9	17.4	16.3	17.7	18.1	15.3	16.7	15.7	17.1	17.5
	6H	16.6	18.0	17.1	18.4	18.8	15.7	17.1	16.1	17.4	17.8
	8H	17.0	18.3	17.4	18.6	19.0	15.8	17.1	16.2	17.5	17.9
	12H	17.3	18.5	17.7	18.9	19.3	15.9	17.1	16.3	17.5	17.9
4H	2H	14.0	15.5	14.4	15.9	16.2	13.9	15.4	14.3	15.7	16.1
	3H	16.0	17.3	16.4	17.7	18.1	15.6	16.9	16.0	17.3	17.7
	4H	17.0	18.1	17.4	18.5	19.0	16.4	17.5	16.8	17.9	18.3
	6H	17.9	18.9	18.3	19.3	19.7	16.9	17.9	17.3	18.3	18.8
	8H	18.2	19.2	18.7	19.6	20.1	17.1	18.0	17.5	18.4	18.9
	12H	18.6	19.4	19.1	19.9	20.4	17.2	18.0	17.6	18.5	19.0
8H	4H	17.3	18.3	17.8	18.7	19.2	16.8	17.7	17.3	18.2	18.6
	6H	18.4	19.2	18.8	19.6	20.1	17.5	18.3	18.0	18.7	19.2
	8H	18.9	19.6	19.3	20.0	20.5	17.7	18.4	18.2	18.9	19.4
	12H	19.4	20.0	19.9	20.4	21.0	17.9	18.5	18.4	19.0	19.5
12H	4H	17.4	18.2	17.9	18.7	19.2	16.9	17.7	17.4	18.2	18.7
	6H	18.5	19.1	19.0	19.6	20.1	17.6	18.3	18.1	18.8	19.3
	8H	19.0	19.6	19.5	20.1	20.6	17.9	18.5	18.4	19.0	19.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		1385.5	1383.6	1385.1	1397.8	1435.7	1494.7	1589.2		
50°		1336.6	1332.7	1334.8	1344.0	1377.2	1434.0	1539.2		
55°		1289.1	1282.8	1284.7	1288.6	1316.7	1369.3	1486.2		
60°		1238.4	1232.2	1231.7	1231.5	1254.1	1301.4	1423.8		
65°		1185.1	1178.4	1173.0	1169.3	1187.5	1227.0	1350.3		
70°		1124.4	1117.1	1101.5	1094.7	1104.8	1136.8	1259.6		
75°		1050.3	1040.9	1015.0	999.3	994.6	1013.2	1128.0		
80°		963.8	946.8	917.7	878.1	851.1	839.3	931.6		
85°		893.3	869.4	828.5	768.6	695.9	621.9	644.4		

Photometric test report

Family Monsun® 12	Order number: 51FP20DP467H3H EAN: 4058352392379	LP number 59060_50
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

