

Photometric test report

Family
Licross® Protected

Order number: **51TP12CN48XFD**
EAN: **4058352418451**

LP number
58524_44




Version prismatic cover, frosted, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-Multilumen CLOi
Setting DC mode (central or group accumulator) initial emergency light level
Rated values Net luminous flux = 3310 lm
 Power consumption = 21.7 W
 Luminous efficacy = 152.5 lm/W

serial
documentation
26.08.2020

siteco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 631 cd/klm

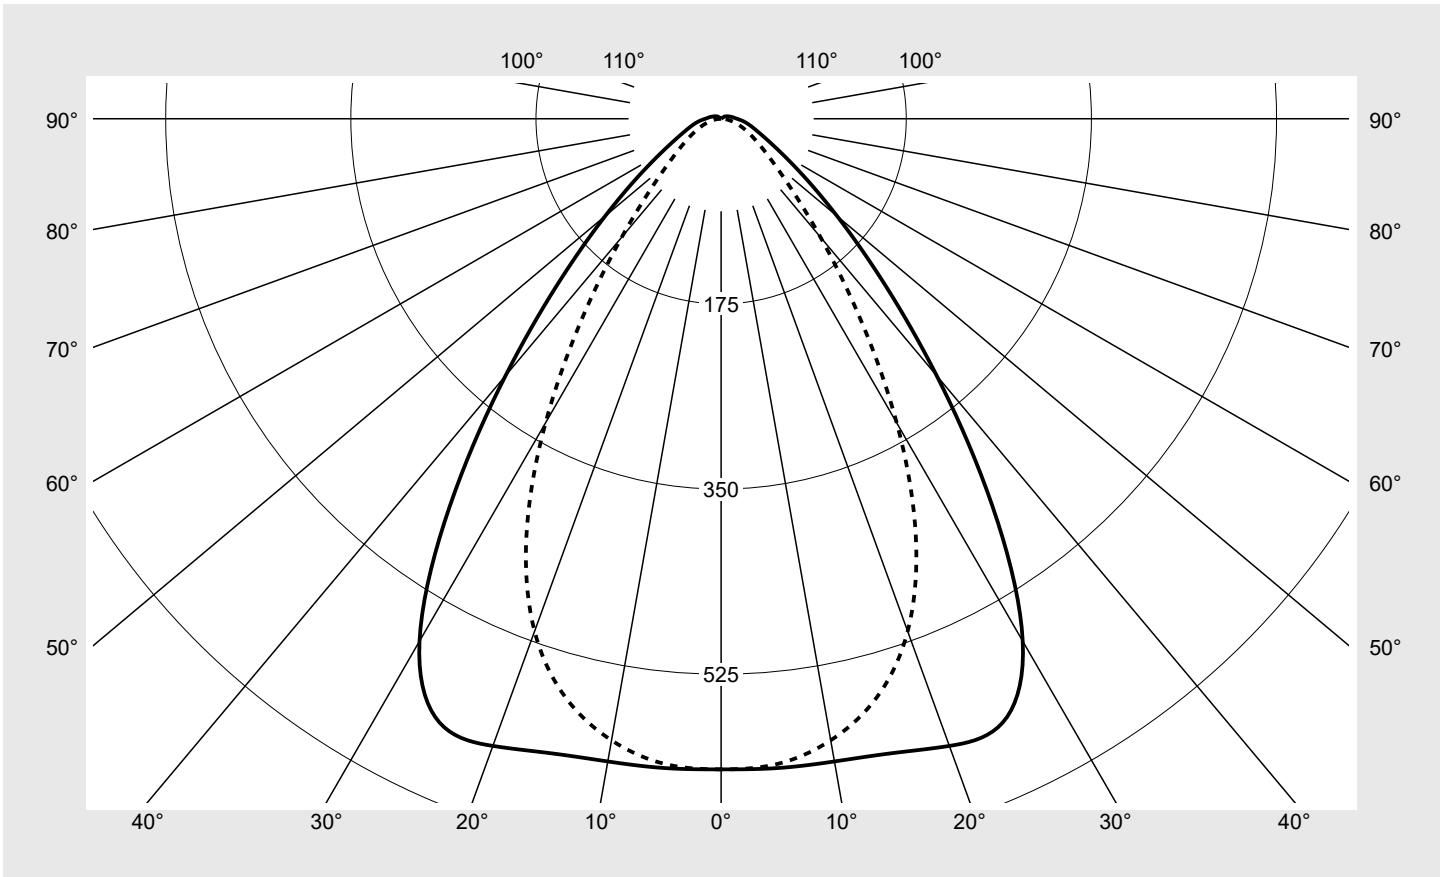

Classifications

DIN 5040 A 5 1
 CIE N1=73 N2=92 N3=98
 N4=99 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 98.6%
 ϕ_o 1.4%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Protected	Order number: 51TP12CN48XFD EAN: 4058352418451	LP number 58524_44
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® Protected	Order number: 51TP12CN48XFD EAN: 4058352418451	LP number 58524_44
-------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
-----------	---------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.4	18.9	17.8	19.2	19.5	14.2	15.6	14.5	15.9	16.2
	3H	17.8	19.1	18.2	19.4	19.8	14.5	15.8	14.9	16.1	16.5
	4H	18.1	19.2	18.5	19.6	20.0	14.7	15.9	15.1	16.2	16.6
	6H	18.4	19.4	18.8	19.8	20.2	14.8	15.9	15.2	16.3	16.7
	8H	18.6	19.5	19.0	19.9	20.3	14.9	15.9	15.3	16.3	16.7
	12H	18.8	19.6	19.2	20.0	20.4	14.9	15.9	15.3	16.3	16.7
4H	2H	17.5	18.7	17.9	19.0	19.4	14.7	15.9	15.1	16.2	16.6
	3H	18.0	19.0	18.5	19.4	19.8	15.2	16.2	15.6	16.5	17.0
	4H	18.4	19.2	18.8	19.7	20.1	15.4	16.3	15.8	16.7	17.1
	6H	18.8	19.5	19.2	20.0	20.4	15.6	16.4	16.0	16.8	17.3
	8H	19.0	19.7	19.5	20.1	20.6	15.7	16.4	16.1	16.8	17.3
	12H	19.3	19.9	19.8	20.3	20.8	15.7	16.3	16.2	16.8	17.3
8H	4H	18.4	19.1	18.8	19.5	20.0	15.6	16.3	16.1	16.7	17.2
	6H	18.9	19.5	19.4	19.9	20.4	15.9	16.5	16.4	16.9	17.4
	8H	19.2	19.7	19.7	20.2	20.7	16.0	16.5	16.5	17.0	17.5
	12H	19.6	20.0	20.1	20.5	21.0	16.1	16.5	16.7	17.1	17.6
12H	4H	18.4	19.0	18.9	19.5	19.9	15.7	16.3	16.2	16.7	17.2
	6H	18.9	19.4	19.4	19.9	20.4	16.0	16.5	16.5	17.0	17.5
	8H	19.2	19.6	19.8	20.2	20.7	16.2	16.6	16.7	17.1	17.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480 B = 78	H(C0) = 13 H(C90) = 0	H(C180) = 13 H(C270) = 0
------------------------	---------------------------------	-------------------------------	--------------------	--------------------------	-----------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		7435.6	7902.6	8649.5	7787.4	5527.6	4105.7	3813.1	
50°		5324.1	5689.1	6353.9	5665.2	3964.6	3002.7	2857.5	
55°		3898.9	4148.4	4636.5	4069.0	2895.0	2338.6	2314.9	
60°		2983.3	3120.7	3405.1	3018.4	2242.7	1923.0	1976.2	
65°		2451.2	2498.3	2588.1	2315.5	1840.3	1654.6	1743.6	
70°		2179.8	2152.8	2067.8	1863.6	1586.5	1464.0	1572.8	
75°		2083.8	1987.8	1768.2	1571.1	1400.8	1298.4	1412.2	
80°		2106.6	1960.9	1645.4	1396.0	1260.4	1164.7	1255.4	
85°		2227.2	2058.1	1669.0	1368.8	1204.2	1064.5	1133.7	

Photometric test report

Family Licross® Protected	Order number: 51TP12CN48XFD EAN: 4058352418451	LP number 58524_44
-------------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

