
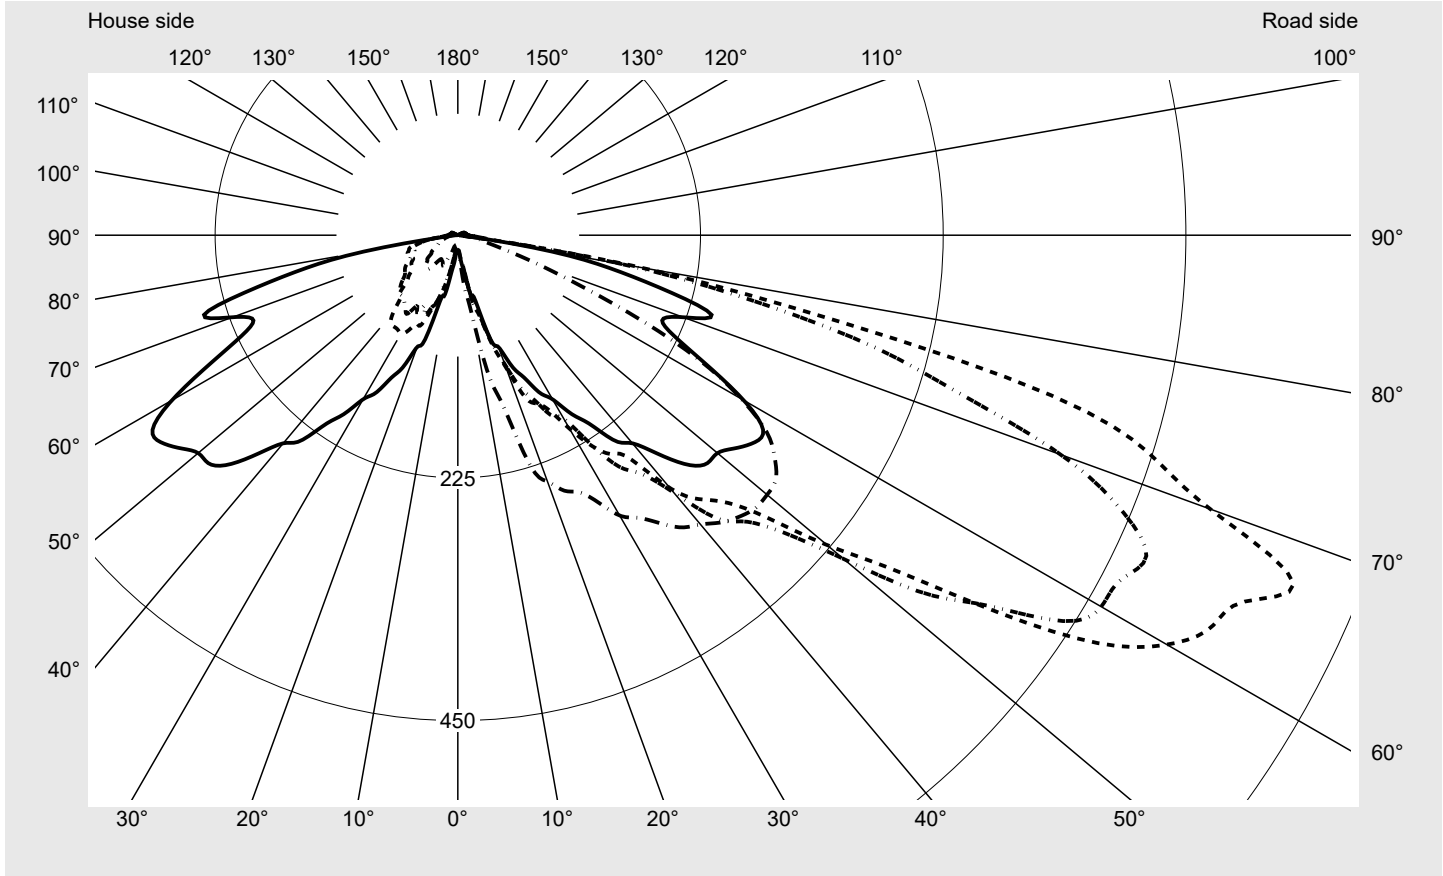


Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
		Version post-top- or mounting to wall arm Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1470 lm Power consumption = 12.9 W Luminous efficacy = 114 lm/W



Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 838 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.9%
Eta 90° - 180°	2.1%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.0
Imax 80°	184.9
Imax 90°	10.2
Imax >90°	9.5
Imax >95°	8.5


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
--	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

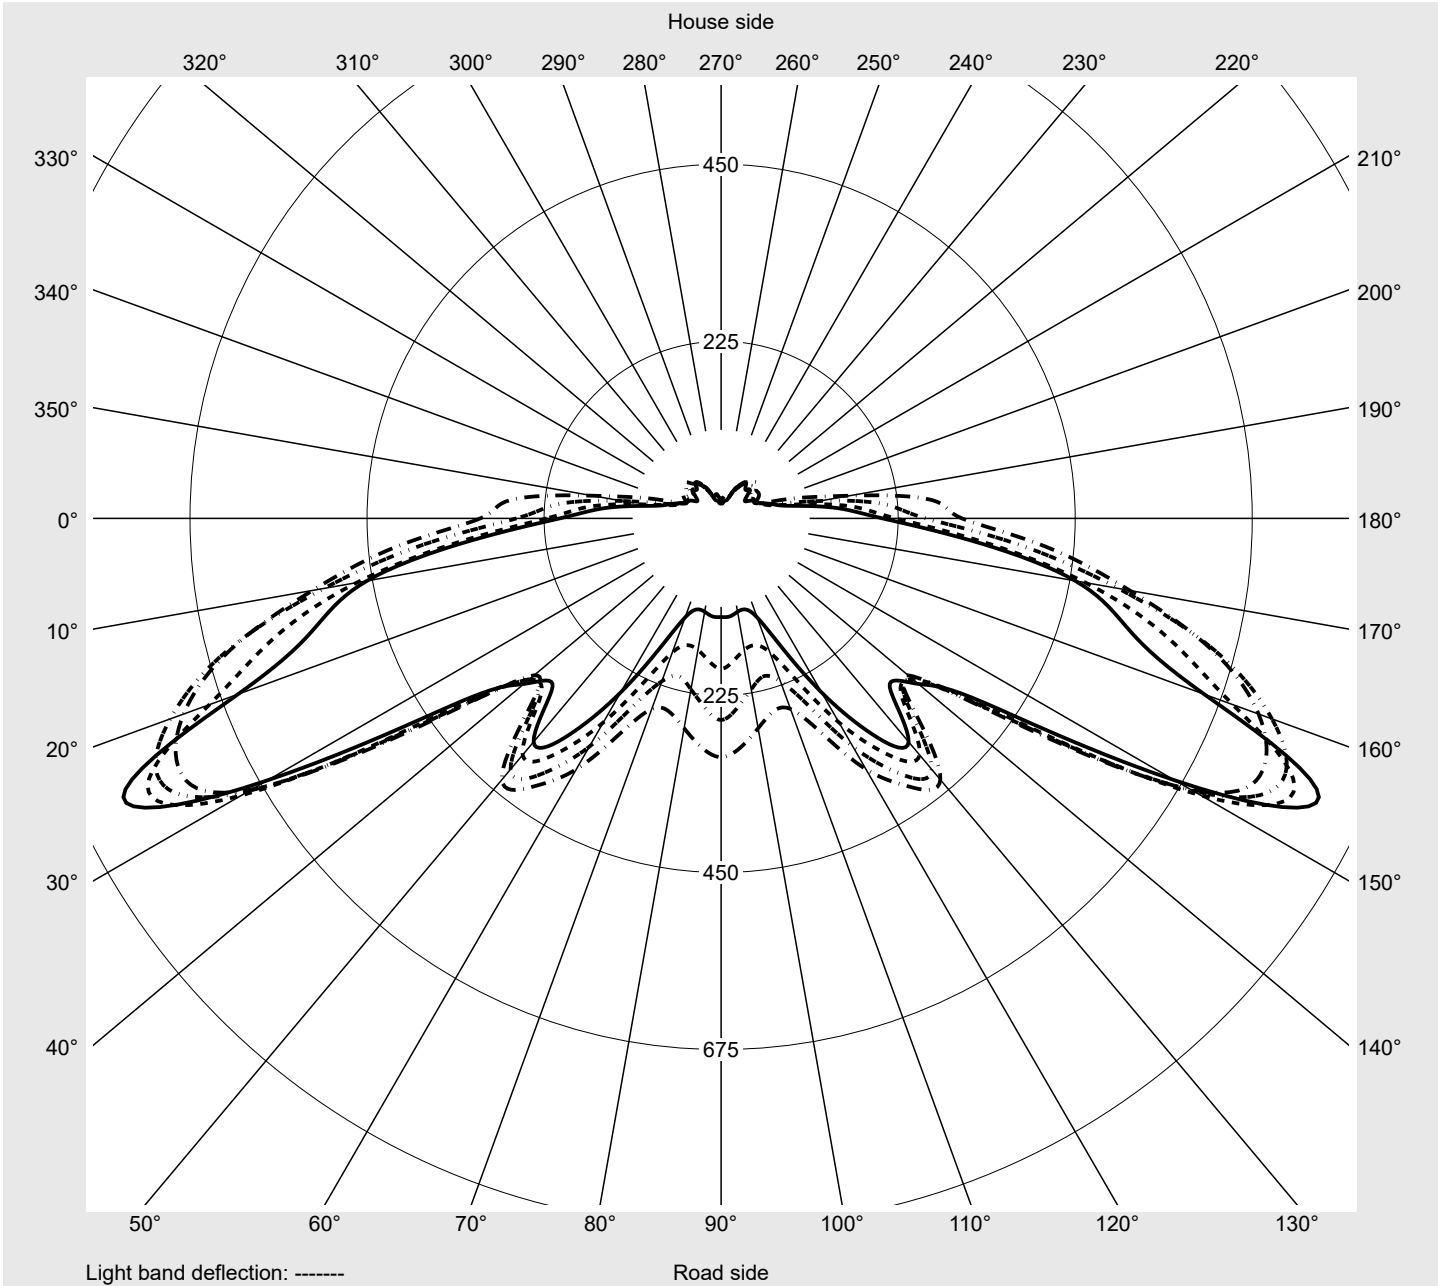

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	15.8	16.1	16.4	16.4	17.1	17.4	18.1	18.1	18.4	19.0	19.7	20.4	21.3
7,5°	26.3	27.9	29.2	27.3	24.3	22.7	21.7	21.7	23.0	26.3	30.9	35.1	39.1
10,0°	36.8	34.5	36.1	36.8	35.5	32.5	28.6	31.5	40.1	51.2	60.4	64.4	69.6
12,5°	57.5	65.7	65.0	79.8	68.6	64.4	62.4	62.7	66.0	70.6	79.5	86.0	97.2
15,0°	62.4	66.3	75.8	84.1	83.4	76.8	75.8	77.5	84.4	103.8	112.6	125.4	141.8
17,5°	102.1	116.2	100.5	102.4	98.2	106.7	103.1	103.4	100.5	122.8	142.2	138.6	156.3
20,0°	110.3	130.0	136.6	141.2	138.6	130.3	127.4	119.2	109.7	139.2	152.0	156.3	186.5
22,5°	132.0	174.3	180.3	175.7	178.0	162.2	154.3	150.0	116.2	146.1	170.7	171.4	201.3
25,0°	145.8	169.1	167.8	182.9	172.0	172.0	169.1	162.2	122.1	158.6	181.6	178.3	220.3
27,5°	164.8	185.5	184.9	187.2	183.5	182.6	188.5	183.2	124.8	172.4	197.3	191.1	233.4
30,0°	175.7	203.2	206.5	229.5	221.6	207.2	196.3	184.5	134.3	194.4	227.9	222.6	268.6
32,5°	196.7	236.7	238.4	251.5	241.3	231.8	230.2	217.0	142.5	231.8	284.7	265.6	284.7
35,0°	214.1	251.8	241.7	249.2	237.7	247.6	262.7	238.0	158.6	248.9	304.4	295.5	317.2
37,5°	240.7	281.7	278.1	279.7	266.9	260.0	278.4	262.3	168.1	286.6	328.7	333.6	361.8
40,0°	251.8	291.6	285.7	303.1	296.8	306.0	311.6	264.3	187.8	301.4	360.2	357.6	380.2
42,5°	275.1	302.4	305.4	319.5	312.2	331.9	356.6	299.8	188.1	349.7	396.3	374.0	399.3
45,0°	300.8	319.5	334.6	353.6	341.8	350.0	375.3	306.3	210.8	348.7	418.0	401.6	410.7
47,5°	313.2	337.2	381.5	409.4	393.3	386.1	406.8	329.6	231.5	382.8	434.7	419.3	425.5
50,0°	314.2	363.1	433.7	455.4	446.2	446.9	466.9	371.0	264.0	379.9	444.9	429.8	424.5
52,5°	324.4	371.0	455.4	482.7	507.6	509.6	545.4	408.8	265.0	379.6	448.2	441.3	419.6
55,0°	335.2	393.3	461.6	515.2	577.5	607.4	598.2	436.7	297.1	366.4	454.4	446.2	410.7
57,5°	335.6	412.1	482.0	591.0	673.1	704.0	665.9	445.2	297.5	365.8	458.4	446.9	399.3
60,0°	306.0	414.7	527.3	645.8	726.9	759.1	688.8	446.5	310.3	348.4	433.4	416.0	368.1
62,5°	260.0	378.9	512.5	650.1	745.0	787.3	692.5	439.0	318.8	336.2	416.3	396.0	334.9
65,0°	221.6	330.6	470.2	588.7	692.1	804.1	704.3	429.5	318.5	326.7	392.4	364.8	299.4
67,5°	205.2	317.2	457.0	533.5	653.4	838.2	665.9	408.8	327.4	303.1	370.7	334.9	255.4
70,0°	222.3	337.2	460.7	517.1	643.9	742.0	595.3	370.7	309.3	267.3	327.0	295.5	213.1
72,5°	246.9	370.0	443.3	504.3	597.2	671.8	487.9	333.9	264.0	202.6	276.1	250.2	174.0
75,0°	203.2	311.9	388.4	450.5	536.8	562.8	398.3	267.6	173.0	114.9	210.1	202.9	149.7
77,5°	149.7	223.3	271.9	316.2	361.5	341.1	280.1	152.7	65.7	80.1	181.6	187.5	134.9
80,0°	92.6	110.6	147.8	179.6	184.9	172.0	156.6	79.1	59.1	69.0	96.5	97.8	61.4
82,5°	18.7	17.4	17.1	17.1	16.4	15.8	15.1	14.1	12.5	11.2	11.8	13.8	13.8
85,0°	12.5	12.8	13.1	13.8	13.5	13.5	12.8	11.8	10.8	9.2	9.9	11.8	12.1
87,5°	11.2	11.2	11.8	12.1	12.1	11.5	11.2	10.5	9.2	8.2	8.9	10.5	10.8
90,0°	9.5	9.9	10.2	10.2	10.2	10.2	9.9	9.2	8.2	7.2	7.9	9.2	9.5
92,5°	8.5	8.9	9.5	9.5	9.2	9.2	8.9	8.5	7.9	6.9	6.9	8.2	8.9
95,0°	8.2	8.2	8.9	8.9	8.5	8.2	8.2	7.9	7.2	6.6	6.9	7.6	8.2
97,5°	7.6	7.6	8.2	8.2	7.9	7.6	7.6	7.2	6.6	6.6	6.2	7.2	7.6
100,0°	6.9	6.9	7.6	7.6	7.2	7.2	7.2	6.6	6.6	5.9	6.2	6.9	7.2
102,5°	6.6	6.9	6.9	6.9	6.9	6.6	6.6	6.2	5.9	5.9	5.9	6.2	6.9
105,0°	6.2	6.2	6.2	6.6	6.6	6.2	6.2	5.9	5.9	5.6	5.6	6.2	6.6
107,5°	5.6	6.2	6.2	6.2	5.9	5.9	5.9	5.6	5.6	5.3	5.6	5.9	6.2
110,0°	5.6	5.6	5.6	5.6	5.6	5.6	5.3	5.3	5.3	5.3	5.3	5.6	5.9
112,5°	5.9	5.3	5.3	5.6	5.3	4.9	4.9	4.9	4.9	5.3	5.3	5.3	5.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6
2,5°	14.8	15.1	15.1	15.1	15.1	15.1	14.4	14.4	14.4	14.4	14.4	14.4	14.4
5,0°	22.3	22.7	23.0	23.3	24.0	23.6	15.8	15.4	15.1	15.1	15.1	14.8	14.8
7,5°	41.0	42.7	45.3	47.6	49.3	49.9	23.3	21.0	19.4	17.1	16.4	15.4	15.4
10,0°	70.3	69.6	71.6	73.9	74.9	73.5	37.4	35.5	34.5	29.9	26.6	21.3	17.1
12,5°	106.1	114.6	123.5	126.1	133.3	134.0	52.9	43.0	35.5	33.2	36.4	36.1	36.8
15,0°	151.4	154.6	156.6	160.2	165.5	165.5	63.7	93.2	74.5	56.5	52.2	47.9	42.7
17,5°	170.4	188.8	207.2	215.1	225.2	224.6	90.9	86.7	85.7	72.2	64.4	65.7	50.9
20,0°	202.6	209.8	219.3	228.2	241.3	243.0	125.4	117.5	98.2	87.7	76.2	71.6	64.7
22,5°	209.5	218.0	231.8	241.0	252.5	256.1	130.3	138.2	125.1	103.8	90.6	81.1	67.6
25,0°	237.1	246.6	247.2	251.5	262.0	262.7	150.0	125.1	120.2	108.7	90.6	71.6	58.4
27,5°	257.1	263.7	268.9	271.2	276.8	277.8	167.5	145.8	116.9	105.4	99.8	80.8	60.4
30,0°	288.3	292.5	289.3	287.6	297.8	300.1	206.9	148.4	128.7	110.0	105.1	75.8	58.8
32,5°	303.1	311.3	309.0	306.0	308.6	310.6	186.2	170.4	141.8	124.4	103.8	86.0	68.0
35,0°	333.6	339.8	327.4	316.2	323.1	325.7	234.4	178.3	154.6	126.1	103.4	84.4	80.4
37,5°	357.6	354.6	338.2	330.3	336.5	341.5	245.6	199.0	156.3	128.4	102.1	80.8	83.4
40,0°	376.6	360.8	348.0	341.1	347.7	350.0	265.0	206.5	168.1	133.6	92.6	77.8	84.1
42,5°	392.0	369.0	352.3	351.0	356.2	361.2	285.7	218.3	178.6	125.8	78.5	76.2	84.1
45,0°	408.4	377.9	359.9	357.9	366.4	369.0	322.4	224.3	179.6	118.2	76.2	76.2	84.1
47,5°	412.4	375.9	363.5	365.1	372.0	374.3	328.7	234.4	180.3	98.8	64.7	72.6	79.1
50,0°	401.9	371.7	360.5	363.5	372.0	374.3	335.9	234.1	174.0	88.0	59.8	68.0	73.9
52,5°	383.8	351.0	348.0	355.6	365.8	371.7	330.0	234.1	164.8	67.0	54.2	62.4	68.3
55,0°	360.2	327.7	326.7	337.2	351.6	358.5	338.8	231.5	148.1	65.3	51.5	59.8	66.3
57,5°	330.3	290.6	294.8	309.9	327.4	339.5	320.5	206.5	118.2	55.8	50.9	58.1	61.4
60,0°	300.1	257.7	254.5	270.9	291.6	303.4	268.6	166.1	99.8	57.5	49.3	55.2	57.5
62,5°	262.3	220.3	207.8	220.6	241.0	256.1	207.8	127.4	71.2	55.5	46.6	50.6	50.2
65,0°	227.2	181.2	166.8	169.7	181.6	191.1	169.1	102.8	64.7	54.8	48.3	48.3	44.7
67,5°	178.6	134.0	119.8	120.5	125.1	125.4	149.1	91.6	69.0	56.5	48.3	45.3	37.8
70,0°	144.8	104.1	82.7	77.5	79.8	80.8	158.9	101.5	76.2	59.1	49.6	42.7	34.1
72,5°	118.2	78.8	50.9	47.0	47.6	49.3	157.6	98.2	73.9	57.5	47.6	43.7	31.2
75,0°	96.2	58.8	37.1	32.8	31.5	31.5	115.9	75.8	60.7	50.2	46.3	43.7	32.5
77,5°	69.6	35.5	27.6	25.0	23.3	23.0	87.0	60.7	52.9	43.7	41.4	38.1	28.2
80,0°	35.5	22.0	20.4	19.7	19.4	19.0	59.4	48.3	46.0	39.4	35.8	31.5	26.3
82,5°	13.5	13.5	13.8	13.8	13.1	13.1	21.7	23.0	25.3	23.6	22.7	22.0	18.4
85,0°	12.1	12.1	12.1	12.1	11.8	11.8	12.8	13.1	12.8	12.8	12.1	11.8	11.5
87,5°	10.8	10.8	11.2	11.2	11.2	11.2	11.5	11.2	11.2	10.8	10.2	9.9	9.2
90,0°	9.9	10.2	10.2	9.9	9.9	9.9	9.9	9.5	9.2	8.9	8.2	8.2	7.6
92,5°	9.2	9.2	9.5	9.2	9.2	9.2	8.9	8.2	8.2	7.6	7.6	6.9	6.6
95,0°	8.5	8.5	8.9	8.5	8.5	8.5	7.9	7.6	7.6	6.9	6.9	6.2	5.9
97,5°	7.9	7.9	8.2	8.5	7.9	7.9	7.6	6.9	6.9	6.2	6.2	5.9	5.6
100,0°	7.6	7.6	7.9	7.9	7.9	7.9	6.9	6.9	6.2	6.2	5.6	5.6	4.9
102,5°	7.2	7.2	7.6	7.9	7.2	7.2	6.2	6.2	5.9	5.6	5.6	4.9	4.9
105,0°	6.9	7.2	7.2	7.2	7.2	7.2	6.2	5.6	5.6	5.3	4.9	4.9	4.3
107,5°	6.6	6.6	6.9	7.2	7.2	7.2	5.6	5.6	4.9	4.9	4.6	4.3	4.3
110,0°	6.2	6.6	6.6	6.6	6.6	6.6	4.9	4.9	4.9	4.6	4.3	4.3	3.9
112,5°	5.9	6.2	6.6	6.6	6.6	5.9	5.9	5.9	5.3	5.3	4.9	4.9	3.6

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	14.6	0.0	0.0
2,5°	14.4	14.8	15.1	15.1	15.1	15.1	15.1	14.8	14.8	14.8	15.1	0.2	0.2
5,0°	14.8	15.1	15.1	14.8	15.1	15.1	14.8	14.8	14.8	14.8	14.4	0.4	0.6
7,5°	15.1	15.1	14.8	14.4	14.4	14.4	14.4	14.4	14.1	14.1	13.8	0.9	1.5
10,0°	15.8	14.8	14.1	13.8	13.8	13.8	13.8	13.1	12.8	12.8	12.5	1.7	3.2
12,5°	29.9	22.3	17.1	14.1	13.8	13.5	13.1	12.5	12.1	11.8	11.8	3.4	6.6
15,0°	37.1	37.8	34.1	28.2	21.7	14.1	13.8	12.5	11.5	11.5	11.2	5.3	11.9
17,5°	38.4	30.2	25.9	25.6	27.3	26.6	21.7	18.4	13.1	12.1	11.8	7.7	19.6
20,0°	44.7	38.1	33.2	30.2	28.2	21.3	15.1	19.0	23.3	22.3	19.0	10.2	29.8
22,5°	42.7	31.2	30.5	28.2	30.9	25.3	18.4	26.3	28.6	24.0	21.7	12.9	42.7
25,0°	39.1	31.8	28.2	26.9	27.6	24.3	19.4	25.6	27.9	29.2	30.2	14.8	57.5
27,5°	43.3	34.5	29.6	28.9	29.9	29.6	23.3	30.5	30.9	26.6	30.2	17.4	75.0
30,0°	46.3	42.0	36.8	32.8	30.2	26.6	24.3	28.2	32.2	28.6	28.2	20.8	95.7
32,5°	60.1	51.2	38.4	32.5	33.5	32.5	29.6	29.9	30.5	27.6	27.6	24.6	120.3
35,0°	80.4	70.9	56.8	49.3	45.6	37.4	28.6	31.5	29.9	26.9	26.9	28.4	148.7
37,5°	88.3	77.5	65.3	59.8	50.6	41.4	33.5	38.7	36.8	32.8	30.9	32.7	181.4
40,0°	86.0	77.8	67.0	60.7	52.9	40.7	35.8	43.0	44.0	39.7	39.4	36.4	217.8
42,5°	87.0	77.2	66.7	62.1	54.5	43.0	38.7	44.3	46.6	42.7	42.0	40.3	258.2
45,0°	85.0	78.5	68.0	63.0	55.2	44.3	37.4	41.7	45.3	41.7	40.7	44.1	302.2
47,5°	82.4	75.5	65.3	62.1	52.9	43.0	37.1	41.7	41.7	38.7	40.1	48.0	350.2
50,0°	76.5	74.5	64.0	61.1	51.9	42.0	36.8	39.1	41.0	37.4	36.8	51.8	402.0
52,5°	73.2	72.2	63.0	61.7	51.5	40.4	36.1	38.7	37.1	34.8	35.5	54.7	456.7
55,0°	69.0	71.2	62.1	58.8	49.9	39.4	33.8	35.1	35.8	30.9	30.2	57.7	514.4
57,5°	63.7	69.0	61.4	57.5	48.9	38.1	31.5	32.8	32.8	28.2	28.9	60.0	574.4
60,0°	58.1	64.4	57.8	54.5	47.3	37.8	30.2	30.2	31.2	26.3	25.6	60.2	634.6
62,5°	50.6	57.1	53.5	56.1	47.9	38.7	28.6	27.9	27.3	23.0	23.0	57.9	692.5
65,0°	45.0	51.5	49.3	55.5	50.2	41.0	28.6	25.6	25.3	21.3	20.4	54.5	747.0
67,5°	41.7	49.9	47.9	54.5	48.6	41.7	27.9	23.6	22.0	19.0	19.0	51.3	798.4
70,0°	36.8	45.6	47.3	51.5	47.0	39.7	27.9	22.3	20.7	17.4	16.4	48.1	846.4
72,5°	31.2	40.7	42.4	48.9	45.3	34.1	28.6	22.0	16.7	15.8	16.4	43.8	890.2
75,0°	28.6	37.1	36.4	38.7	34.5	26.6	24.0	21.3	16.4	13.8	13.1	36.4	926.7
77,5°	24.0	27.9	27.3	29.2	24.0	19.4	17.7	16.4	12.8	11.5	11.8	26.1	952.7
80,0°	20.7	19.7	18.7	21.3	18.7	17.7	15.4	14.1	11.2	10.2	9.9	15.7	968.4
82,5°	15.1	14.1	12.8	15.4	15.4	15.8	14.4	12.8	9.2	8.9	8.5	4.3	972.7
85,0°	9.5	8.2	7.2	9.5	9.5	9.5	9.5	9.5	7.6	6.9	6.6	3.0	975.7
87,5°	7.6	6.6	5.6	7.2	7.2	7.6	7.2	6.9	5.6	5.6	5.3	2.6	978.3
90,0°	6.6	5.3	4.6	5.3	5.6	5.6	5.3	5.3	4.6	4.3	3.9	2.2	980.6
92,5°	5.6	4.9	3.9	4.6	4.9	4.6	4.6	4.6	3.9	3.9	3.9	2.0	982.6
95,0°	5.3	4.6	3.9	4.3	4.6	4.3	4.3	3.9	3.9	3.6	3.3	1.9	984.4
97,5°	4.9	4.3	3.3	3.9	3.9	3.9	3.9	3.9	3.6	3.3	3.3	1.7	986.1
100,0°	4.9	4.3	3.6	3.6	3.9	3.9	3.6	3.9	3.3	3.3	3.3	1.6	987.7
102,5°	4.3	3.9	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	1.5	989.2
105,0°	4.3	3.6	3.3	3.3	3.3	3.3	3.3	3.3	3.0	2.6	2.6	1.4	990.6
107,5°	3.9	3.6	3.3	3.3	3.0	3.0	2.6	2.6	2.6	2.6	2.6	1.3	991.9
110,0°	3.6	3.6	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	993.1
112,5°	3.6	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.2	994.3

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.9	4.9	4.9	4.9	4.9	4.6	4.6	4.6	4.6	4.9	4.9	5.3	5.3
117,5°	4.3	4.3	4.3	4.6	4.3	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
120,0°	4.3	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.9
122,5°	3.0	3.0	3.0	3.0	2.6	2.6	2.3	2.3	2.6	2.6	2.6	3.0	2.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	1.6	2.0	2.0
127,5°	2.0	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
130,0°	1.3	1.3	1.3	3.0	3.0	3.0	3.0	1.3	1.3	1.3	1.3	1.3	1.3
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.0	1.0	1.0
135,0°	1.6	1.3	1.3	1.0	1.3	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7
137,5°	1.3	1.3	1.3	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.3	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	5.6	5.9	5.9	5.9	5.9	3.9	4.6	4.3	4.3	4.3	3.6	3.6	3.6
117,5°	4.9	5.3	5.6	5.6	4.3	2.0	4.3	4.3	3.6	3.6	3.6	3.6	3.3
120,0°	3.9	4.3	4.6	4.6	3.3	2.0	3.6	3.6	3.0	3.0	3.0	3.0	3.0
122,5°	3.0	3.3	3.3	3.3	2.3	1.3	2.6	2.3	2.3	2.3	2.3	2.3	2.3
125,0°	2.0	2.0	2.0	2.0	1.3	0.7	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127,5°	1.3	1.3	1.3	1.3	1.3	0.7	1.6	2.0	1.6	2.0	2.0	2.0	2.0
130,0°	1.3	1.3	1.3	1.3	1.0	0.7	1.6	1.3	1.3	1.6	1.6	2.0	1.6
132,5°	1.3	1.3	1.3	1.0	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
135,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
137,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.0	1.3	1.3	1.3	1.3	1.3
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.3	1.0	1.3	1.3	1.3	1.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	3.3	3.3	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	1.1	995.4
117,5°	3.0	3.0	3.0	2.6	2.6	2.0	2.3	2.6	2.6	2.3	2.6	0.9	996.3
120,0°	2.6	2.6	2.6	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.6	0.8	997.1
122,5°	2.3	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	0.6	997.6
125,0°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	2.0	2.0	2.0	0.4	998.0
127,5°	2.0	2.0	2.0	2.0	2.0	1.6	1.6	1.6	1.6	1.6	2.0	0.3	998.4
130,0°	1.6	1.6	1.6	1.3	1.3	1.3	1.3	1.6	1.3	1.3	1.3	0.3	998.7
132,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.0
135,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.2
137,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	0.7	1.3	1.3	0.2	999.5
142,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.0	1.0	1.3	1.3	1.3	0.2	999.7
145,0°	1.3	1.3	1.3	1.3	1.3	1.0	1.3	1.3	1.3	1.0	0.7	0.2	999.9
147,5°	1.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.7	1.0	1.3	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT ELEGANCE LED	Order number: 5XA5265AF14H EAN: 4058352834770	LP number 57133_31
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	12.9	13.3	13.1
95	241	252	1395	12.2	12.6	12.4
90	229	250	1325	11.5	11.9	11.7
85	216	248	1250	10.7	11.1	10.9
80	203	246	1175	10.1	10.5	10.3
75	190	243	1100	9.4	9.8	9.6
70	178	241	1030	8.9	9.1	9.0
65	165	238	955	8.2	8.4	8.3
60	152	235	880	7.6	7.8	7.7
55	140	232	810	7.0	7.2	7.1
50	127	229	735	6.4	6.6	6.5
45	114	225	660	5.8	6.0	5.9
40	102	221	590	5.3	5.4	5.4
35	89	216	515	4.8	4.9	4.8
30	76	210	440	4.3	4.3	4.3
25	63	203	365	3.7	3.8	3.8
24	60	201	347	3.5	3.7	3.6