
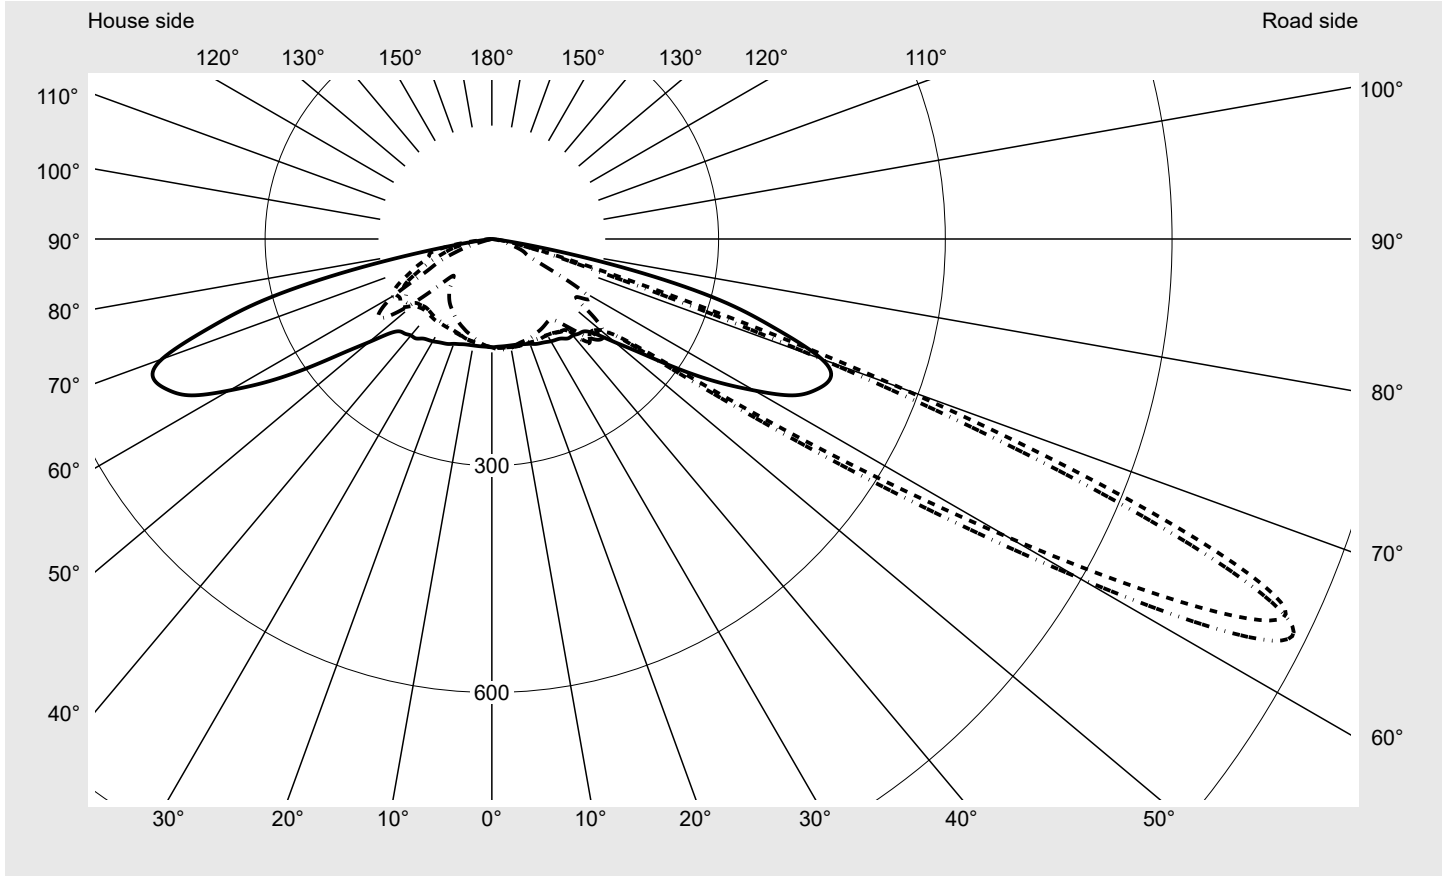


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST1.5a) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 9290 lm Power consumption = 70.9 W Luminous efficacy = 131 lm/W	serial documentation 12.09.2022



Luminous intensity in cd/klm
C180-0
C215-35
C217,5-37,5
C270-90
Imax: 1158 cd/klm



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	798.1
Imax 80°	214.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
--	--	-------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62.5°** **KMK 60°** **KMK 57.5°** **siteco**

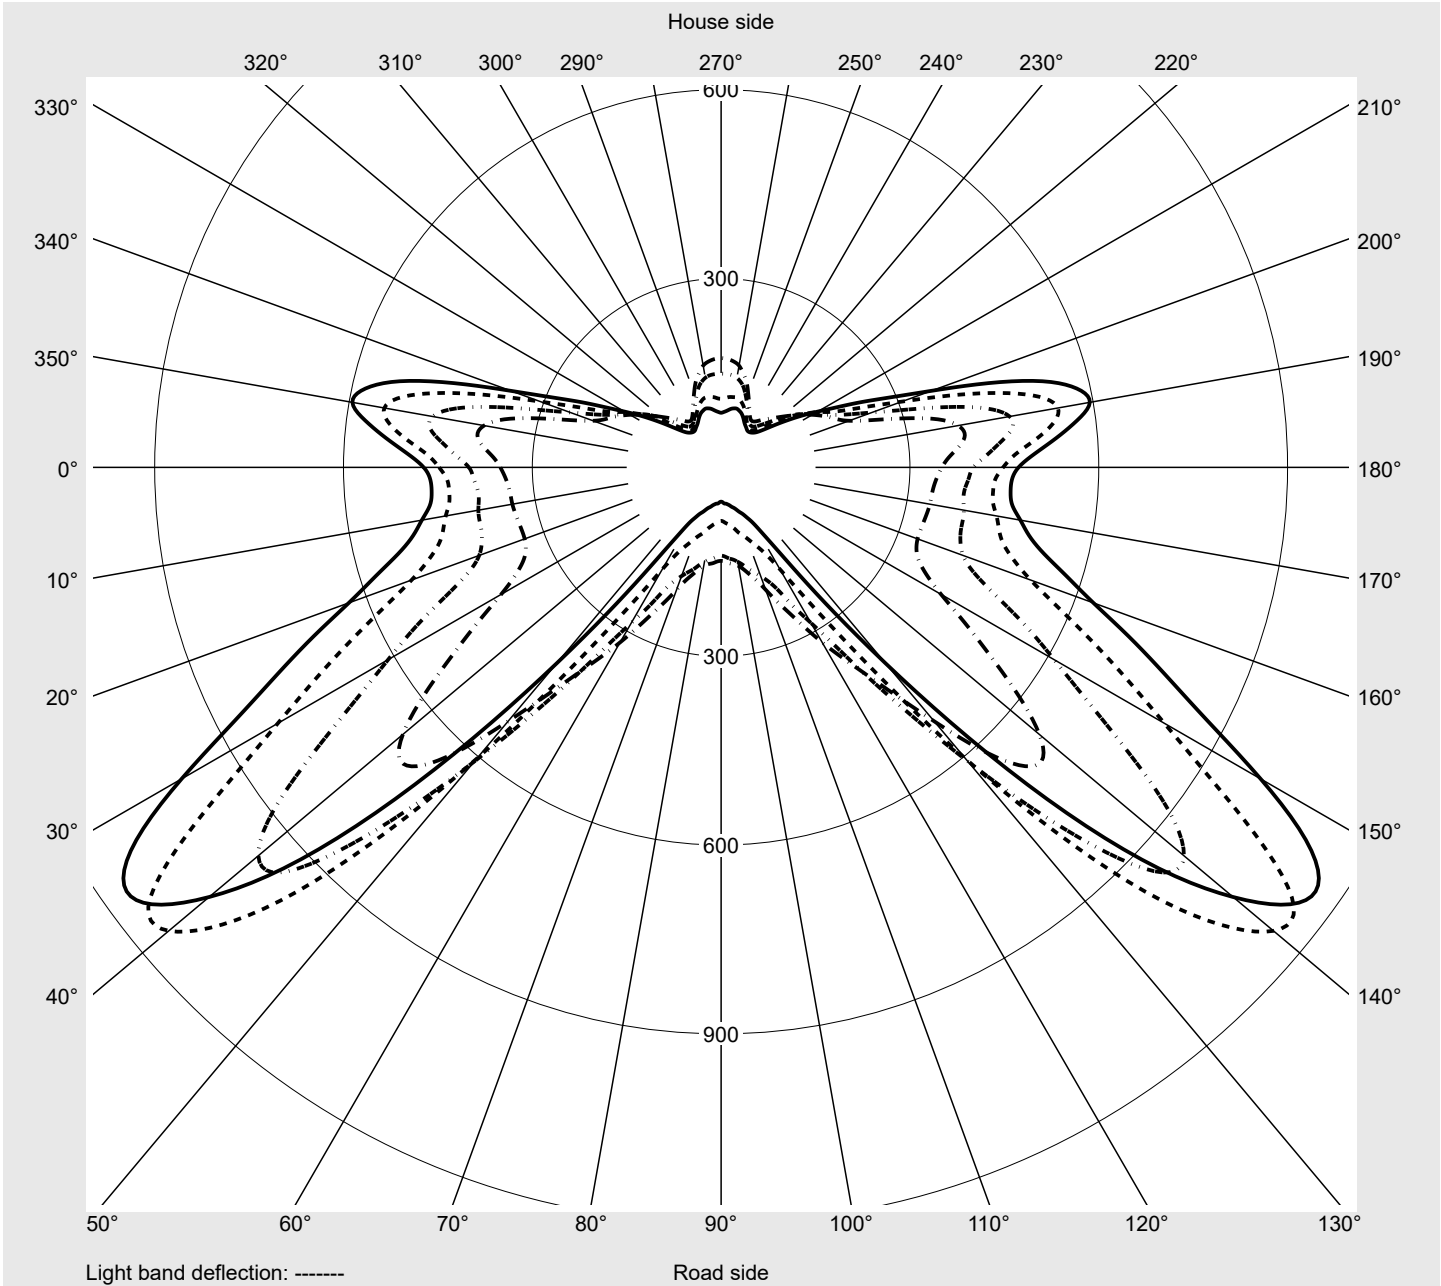

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.8	142.8	142.8	142.9	143.1	143.1	143.1	143.2	143.3	143.4	143.5	143.6	143.7	143.8	143.9
5,0°	142.7	142.9	143.0	143.1	143.3	143.5	143.6	143.7	143.9	143.9	144.0	144.1	144.2	144.3	144.4
7,5°	142.8	143.0	143.2	143.4	143.5	143.7	143.9	143.9	144.1	144.1	144.2	144.3	144.3	144.4	144.5
10,0°	143.0	143.3	143.5	143.6	143.9	144.0	144.0	144.1	144.2	144.3	144.4	144.5	144.7	144.8	145.1
12,5°	143.4	143.6	143.9	144.1	144.3	144.4	144.4	144.4	144.5	144.7	144.9	145.1	145.3	145.5	145.6
15,0°	144.2	144.5	144.8	144.9	145.1	145.1	145.1	145.2	145.4	145.6	145.7	146.0	146.0	146.1	146.1
17,5°	145.8	146.0	146.1	146.2	146.1	146.1	146.3	146.6	146.9	147.3	147.5	147.4	147.2	146.6	146.1
20,0°	147.6	147.9	147.9	147.8	147.6	147.5	148.0	148.5	149.0	149.4	149.3	149.1	148.4	147.2	145.9
22,5°	150.4	150.6	150.6	150.3	149.8	149.8	150.4	151.2	151.9	152.3	152.2	151.2	150.0	148.4	146.5
25,0°	152.1	152.6	152.7	152.4	151.8	151.8	152.5	153.5	154.3	154.7	154.1	152.8	151.0	149.1	147.2
27,5°	153.8	154.4	154.7	154.3	153.6	153.6	154.1	154.9	155.5	155.5	154.3	152.3	150.0	148.0	146.5
30,0°	156.3	157.0	157.4	156.8	155.7	155.5	155.7	156.0	156.0	155.2	153.4	151.2	149.2	147.9	147.1
32,5°	158.1	158.9	159.8	158.7	157.2	156.8	156.8	156.5	155.9	154.8	153.4	151.9	150.7	149.5	148.5
35,0°	160.7	161.8	162.6	162.2	160.9	160.1	159.4	158.7	158.1	157.0	155.7	154.5	153.2	152.0	151.0
37,5°	165.7	166.1	166.2	165.4	165.0	164.2	162.8	161.5	160.7	160.4	159.8	158.2	156.6	154.8	153.7
40,0°	166.6	168.0	168.8	167.7	167.3	166.7	165.5	164.1	163.2	162.3	161.4	160.3	159.5	159.1	159.4
42,5°	170.0	170.9	171.8	172.1	171.9	171.0	169.4	168.2	166.9	166.4	165.8	167.1	170.6	177.0	183.4
45,0°	172.8	175.4	177.0	177.0	176.3	174.8	173.5	173.2	174.0	177.6	181.1	184.0	186.0	187.8	186.7
47,5°	185.7	187.3	190.2	192.0	190.4	188.4	189.3	191.3	193.7	195.3	194.9	193.8	191.8	189.0	185.1
50,0°	212.4	217.2	220.2	221.6	222.5	223.0	223.3	222.1	219.2	214.6	208.3	202.9	198.2	194.4	191.1
52,5°	247.1	249.7	251.8	252.7	252.4	251.7	249.9	246.8	241.4	234.4	227.7	220.9	214.7	212.4	214.2
55,0°	297.3	297.7	296.4	295.8	295.4	294.0	291.1	286.7	281.1	274.7	268.6	263.1	262.8	276.5	308.0
57,5°	350.8	343.8	339.4	337.4	336.8	335.2	333.3	332.0	332.2	335.9	345.9	367.3	403.6	458.5	522.3
60,0°	400.7	393.9	388.9	388.3	391.7	393.1	394.0	398.8	409.1	433.6	481.3	545.9	610.9	689.2	790.7
62,5°	448.1	436.0	433.8	435.8	444.3	452.1	463.5	487.0	523.4	578.3	647.3	725.1	813.3	924.2	1055.4
65,0°	472.5	462.3	461.7	467.0	482.8	501.3	531.4	575.9	629.5	700.3	778.1	870.7	989.9	1101.5	1157.9
67,5°	484.2	471.1	471.3	481.5	504.1	534.5	585.0	642.0	703.7	780.6	869.3	953.0	995.9	986.1	943.8
70,0°	464.4	449.7	450.7	467.4	493.7	530.1	578.7	634.7	700.5	767.2	798.1	784.8	735.5	664.7	573.7
72,5°	392.8	388.4	393.0	413.7	440.2	469.5	503.0	541.4	565.4	566.1	534.9	483.8	414.8	333.4	252.8
75,0°	312.1	307.6	313.3	327.7	348.5	372.0	389.6	388.5	368.3	332.7	294.3	244.7	190.7	137.0	105.3
77,5°	189.9	195.2	198.5	206.5	221.1	230.8	229.7	213.5	188.8	161.7	132.1	99.8	74.0	60.2	51.1
80,0°	70.3	62.4	59.0	57.6	57.7	62.9	73.3	71.0	58.9	47.0	36.3	30.1	27.5	25.5	23.4
82,5°	14.9	14.1	13.5	13.4	13.9	14.7	15.6	15.7	14.3	11.7	10.5	10.4	10.5	10.5	10.1
85,0°	4.1	4.1	4.0	4.1	4.1	4.1	4.2	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.8
87,5°	2.1	2.1	2.1	2.2	2.2	2.2	2.1	2.1	2.1	2.0	1.9	1.9	1.9	1.8	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	144.1	144.2	144.3	144.4	144.4	144.6	144.8	144.9	145.0	145.1	145.1	145.2	145.2	145.2	145.3
5,0°	144.5	144.7	144.8	144.9	144.9	145.1	145.2	145.4	145.6	145.6	145.7	145.8	145.9	146.0	146.1
7,5°	144.7	144.9	145.1	145.2	145.4	145.6	145.8	146.1	146.2	146.5	146.7	146.8	146.9	147.0	147.1
10,0°	145.2	145.5	145.7	145.9	146.1	146.2	146.3	146.5	146.6	146.7	146.7	146.7	146.6	146.6	146.5
12,5°	145.7	145.9	146.1	146.1	146.1	146.0	146.0	145.9	145.6	145.4	145.2	145.0	144.8	144.7	144.6
15,0°	146.1	145.9	145.6	145.1	144.7	144.3	144.0	143.8	143.5	143.3	143.0	142.7	142.5	142.4	142.3
17,5°	145.3	144.7	144.1	143.4	142.7	142.2	141.7	141.5	141.3	141.2	141.2	141.0	141.0	140.9	141.0
20,0°	144.5	143.3	142.3	141.7	141.2	140.9	140.5	140.5	140.3	140.4	140.3	140.3	140.3	140.4	140.3
22,5°	144.7	143.2	142.2	141.4	140.9	140.6	140.5	140.3	140.1	140.1	140.1	140.1	140.1	140.0	140.0
25,0°	145.3	143.8	142.6	141.9	141.4	141.1	140.9	140.7	140.4	140.1	139.9	139.6	139.2	139.0	138.7
27,5°	145.4	144.7	144.0	143.4	142.6	142.1	141.4	140.8	140.1	139.5	138.8	138.3	138.0	137.7	137.4
30,0°	146.6	146.3	146.1	145.6	144.4	143.1	141.8	140.7	139.7	138.9	138.3	137.6	137.1	136.7	136.2
32,5°	147.9	148.3	149.4	149.2	147.7	145.3	143.3	141.7	140.4	139.2	138.3	137.2	136.3	135.5	134.8
35,0°	150.4	150.2	150.8	151.6	149.9	147.1	144.6	142.5	140.6	139.0	137.8	136.6	135.8	134.9	134.1
37,5°	152.8	151.9	150.7	149.7	150.1	149.1	146.8	143.8	141.6	139.8	138.4	136.9	135.7	134.7	134.1
40,0°	161.0	164.5	168.6	171.3	172.7	172.2	170.1	166.1	160.9	154.8	148.7	143.6	140.7	139.7	140.2
42,5°	186.8	187.3	186.7	184.0	179.0	173.8	170.0	166.2	161.1	157.4	154.7	152.9	152.7	153.8	155.1
45,0°	182.8	178.9	174.1	169.8	166.6	164.1	163.1	163.3	163.6	164.9	166.2	167.6	169.7	172.0	174.0
47,5°	180.0	176.2	173.4	171.2	170.1	170.8	172.0	175.4	179.8	184.3	187.4	189.6	191.8	193.5	194.1
50,0°	187.5	185.2	183.9	184.0	187.3	192.4	199.0	205.3	210.0	214.2	216.3	214.8	212.0	209.8	207.2
52,5°	218.8	227.2	239.6	251.9	261.3	267.0	266.2	261.5	253.9	247.3	244.9	235.9	226.3	216.2	206.7
55,0°	351.2	391.6	419.1	432.1	429.9	408.9	375.3	339.6	313.6	292.8	274.7	252.0	228.2	207.5	190.9
57,5°	595.6	660.1	690.6	669.0	605.5	526.5	457.2	401.8	358.6	321.1	285.3	254.5	229.7	207.0	188.8
60,0°	897.1	959.8	952.8	864.4	739.0	609.8	497.0	406.8	334.3	285.2	249.3	216.0	196.1	183.8	174.5
62,5°	1147.2	1145.6	1075.2	953.7	783.7	604.3	437.1	316.8	238.8	187.0	157.2	140.6	129.3	119.9	112.9
65,0°	1140.2	1062.0	943.2	776.3	584.1	406.2	271.7	178.5	129.0	102.9	90.7	82.1	76.9	71.7	67.6
67,5°	852.9	715.2	554.7	398.3	252.6	153.7	106.1	81.9	70.1	64.3	61.5	59.7	59.3	58.8	56.0
70,0°	460.6	337.8	231.0	155.4	103.2	75.1	62.5	55.5	51.5	49.6	48.1	46.9	45.9	46.1	46.2
72,5°	182.3	140.9	106.6	78.2	58.1	47.0	41.2	38.6	37.0	36.0	35.6	34.2	33.6	32.9	27.9
75,0°	85.2	71.5	56.9	44.0	35.4	29.8	27.3	26.0	25.1	24.5	24.2	23.4	22.1	19.8	19.4
77,5°	44.0	38.2	31.8	25.6	21.3	19.0	18.3	17.5	16.9	16.5	16.3	15.8	15.2	14.8	14.4
80,0°	21.2	19.3	16.6	14.1	12.4	11.8	11.6	11.4	11.0	10.9	10.7	10.4	10.1	9.9	9.7
82,5°	9.4	8.9	8.3	7.5	6.9	6.6	6.7	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.8
85,0°	3.6	3.6	3.5	3.3	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.8	2.6	2.6
87,5°	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
---	--	--------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	145.3	145.4	145.4	145.5	145.6	145.6	145.6	142.6	142.5	142.3	142.2	142.2	142.1	142.1	142.1
5,0°	146.1	146.2	146.3	146.4	146.4	146.5	146.5	142.6	142.3	142.0	141.8	141.7	141.5	141.4	141.3
7,5°	147.2	147.2	147.4	147.4	147.4	147.4	147.4	142.5	142.2	141.9	141.5	141.3	141.0	140.9	140.6
10,0°	146.5	146.6	146.6	146.5	146.5	146.5	146.5	142.6	142.2	141.8	141.4	141.0	140.9	140.5	140.2
12,5°	144.4	144.5	144.4	144.4	144.3	144.3	144.2	142.9	142.4	142.0	141.5	141.1	140.7	140.4	139.9
15,0°	142.2	142.2	142.3	142.3	142.3	142.3	142.2	143.8	143.3	142.8	142.3	141.9	141.5	141.2	140.7
17,5°	141.1	141.2	141.3	141.4	141.4	141.4	141.4	145.2	144.8	144.3	143.6	143.0	142.4	141.8	140.8
20,0°	140.4	140.5	140.5	140.7	140.8	140.8	140.8	147.3	146.5	145.6	144.8	143.9	143.0	141.8	140.5
22,5°	139.9	139.8	139.7	139.7	139.6	139.7	139.6	149.4	148.7	147.6	146.5	145.5	144.1	142.5	140.9
25,0°	138.4	138.1	138.0	137.9	137.9	137.9	137.9	151.2	150.2	149.3	148.4	147.4	145.6	143.9	142.0
27,5°	137.1	136.8	136.6	136.5	136.6	136.5	136.6	152.7	151.8	150.9	149.9	148.7	147.0	145.2	143.3
30,0°	135.8	135.5	135.2	135.0	134.9	134.9	134.9	155.2	153.9	152.7	151.4	149.7	147.9	146.1	144.4
32,5°	134.2	133.8	133.5	133.2	133.0	132.9	133.0	156.7	155.1	153.8	152.3	150.5	148.7	147.0	145.0
35,0°	133.5	133.0	132.6	132.3	132.1	131.9	131.7	159.5	158.1	156.8	154.7	152.5	150.7	148.8	146.6
37,5°	134.1	134.6	135.3	135.8	135.6	135.3	135.3	164.1	162.4	160.4	157.6	155.1	152.7	150.7	148.2
40,0°	141.5	143.4	145.4	147.7	148.3	148.1	148.2	165.1	164.0	162.6	160.2	157.7	155.5	153.2	150.2
42,5°	156.6	158.9	161.5	164.4	166.1	166.3	166.6	167.6	166.7	164.7	162.6	160.7	158.1	155.4	152.1
45,0°	175.6	177.6	179.9	182.7	184.9	185.8	186.2	171.1	169.4	167.5	165.8	163.4	161.1	158.2	154.7
47,5°	193.8	193.5	193.6	194.5	196.0	196.2	196.3	180.0	178.3	175.0	171.8	168.7	165.6	162.4	158.6
50,0°	204.0	200.6	199.2	198.4	196.3	193.5	192.8	212.1	205.3	200.3	195.6	190.4	185.6	180.4	173.7
52,5°	197.6	189.8	183.6	178.6	174.9	172.1	170.8	243.5	242.7	237.2	226.1	212.7	202.8	194.8	186.6
55,0°	177.1	164.9	154.2	146.9	142.0	137.7	136.4	306.3	307.5	309.4	296.7	269.6	235.8	209.4	194.7
57,5°	176.5	166.2	159.0	155.0	152.9	149.8	148.6	362.1	379.4	390.6	382.5	352.8	300.9	249.5	216.4
60,0°	167.1	158.5	152.4	147.8	145.2	141.9	140.3	421.2	444.2	465.8	465.4	432.2	370.1	303.7	255.1
62,5°	107.3	100.2	95.5	91.5	89.0	86.4	85.0	467.6	500.7	531.6	543.3	518.0	456.8	379.0	305.5
65,0°	64.9	61.8	59.7	58.1	57.6	55.5	54.5	498.8	534.5	570.4	594.8	578.8	528.7	445.1	355.5
67,5°	53.4	51.7	50.7	49.7	48.7	47.1	47.2	511.9	544.5	577.9	603.6	591.4	551.6	488.4	410.8
70,0°	43.2	41.3	40.3	39.7	39.7	39.7	39.6	483.2	514.9	547.5	567.8	560.5	538.9	500.0	449.0
72,5°	25.2	23.6	23.4	23.5	30.6	32.6	28.2	418.6	437.7	467.2	483.2	493.6	490.6	479.8	460.1
75,0°	19.3	18.6	18.2	18.1	30.1	24.0	20.9	317.6	333.1	354.8	376.5	394.0	408.6	419.8	423.9
77,5°	13.9	13.6	13.2	13.1	14.9	14.6	14.3	205.9	210.9	224.6	243.3	263.8	286.8	308.4	326.0
80,0°	9.3	8.9	8.7	8.6	8.8	8.9	9.2	74.8	83.6	95.3	110.3	128.9	151.2	174.9	196.6
82,5°	5.5	5.2	5.0	4.9	4.9	5.3	5.5	17.3	18.5	21.3	25.4	31.0	39.7	52.1	68.0
85,0°	2.4	2.4	2.4	2.3	2.4	2.3	2.3	3.8	4.0	4.0	3.9	3.9	3.8	3.8	3.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
--	--	-------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.0	141.9	141.9	141.9	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.7
5,0°	141.2	140.9	140.9	140.9	140.8	140.7	140.6	140.4	140.3	140.2	140.1	140.1	140.0	139.8	139.9
7,5°	140.4	140.1	140.0	139.7	139.6	139.3	139.2	139.0	138.8	138.7	138.5	138.4	138.3	138.1	137.9
10,0°	139.9	139.6	139.2	139.0	138.8	138.4	138.1	137.7	137.2	136.9	136.4	136.0	135.7	135.3	134.9
12,5°	139.6	139.3	139.0	138.7	138.1	137.6	137.1	136.4	135.9	135.4	134.9	134.4	133.8	133.2	132.8
15,0°	140.2	139.6	138.8	138.0	137.3	136.6	135.9	135.1	134.3	133.6	132.8	131.9	131.1	130.4	129.8
17,5°	139.7	138.5	137.5	136.4	135.4	134.6	133.9	133.2	132.3	131.4	130.6	129.8	129.0	128.3	127.5
20,0°	139.1	137.8	136.6	135.4	134.4	133.3	132.3	131.4	130.4	129.4	128.5	127.6	126.8	125.9	125.3
22,5°	139.3	137.8	136.4	135.2	133.8	132.4	131.1	129.8	128.5	127.4	126.3	125.4	124.4	123.6	123.0
25,0°	140.1	138.4	136.7	134.9	133.2	131.5	129.9	128.5	126.9	125.5	124.5	123.3	122.4	121.4	120.6
27,5°	141.3	139.2	137.1	134.9	132.8	131.0	129.1	127.2	125.6	124.0	122.8	121.6	120.3	119.1	118.2
30,0°	142.2	140.0	137.6	135.3	132.9	130.7	128.7	126.7	124.8	122.9	121.3	119.9	118.3	116.9	115.6
32,5°	142.9	140.5	138.3	135.8	133.2	130.8	128.5	126.2	123.9	121.9	119.9	118.2	116.5	114.8	113.1
35,0°	144.0	141.3	138.6	135.9	133.3	131.0	128.2	125.6	122.9	120.5	118.2	116.0	114.1	112.2	110.5
37,5°	145.2	142.2	139.2	136.3	133.5	130.3	127.4	124.7	121.8	118.7	116.0	113.6	111.4	109.5	107.9
40,0°	146.9	143.5	140.1	136.9	133.5	129.9	126.4	123.1	120.3	117.3	114.2	111.2	108.6	106.5	104.9
42,5°	148.3	144.3	140.5	137.2	133.5	129.6	125.7	122.1	118.7	115.6	112.2	109.2	106.0	103.3	101.0
45,0°	150.4	146.1	141.8	137.8	134.0	130.3	126.3	122.5	118.4	114.9	111.1	107.4	103.6	99.7	96.4
47,5°	154.1	149.6	145.6	141.5	137.5	132.9	128.8	124.5	120.0	115.9	112.0	107.6	103.4	99.2	94.9
50,0°	166.8	160.9	155.2	149.5	143.5	137.9	131.6	126.4	122.1	117.8	113.2	108.3	104.2	100.6	97.6
52,5°	179.8	174.5	170.1	164.1	156.2	147.8	139.1	130.8	123.7	117.4	111.7	105.9	101.2	98.0	96.6
55,0°	185.2	177.8	170.1	162.7	154.9	147.7	140.2	134.0	127.2	119.1	111.1	103.6	97.7	94.2	93.3
57,5°	199.9	189.5	178.3	167.1	155.5	144.5	134.5	125.1	116.9	109.6	103.4	97.8	92.4	89.1	88.8
60,0°	220.3	197.3	182.2	170.4	157.7	146.8	134.4	121.2	108.5	98.4	90.5	84.7	81.8	81.5	82.9
62,5°	252.5	213.6	190.4	175.7	159.1	144.8	128.9	112.2	98.3	87.7	81.0	76.8	75.3	76.6	78.9
65,0°	290.5	245.2	206.5	177.3	153.7	132.3	113.9	98.3	86.6	78.9	74.8	72.4	71.4	72.1	74.4
67,5°	339.6	279.5	227.5	177.0	142.6	117.7	98.8	85.5	76.4	71.1	68.2	66.4	65.4	65.9	67.6
70,0°	393.3	334.0	256.5	185.8	133.6	105.7	86.3	74.3	67.3	63.1	60.3	58.7	58.0	57.8	59.4
72,5°	430.2	379.5	299.1	206.5	133.5	92.5	71.9	61.6	56.0	52.6	50.3	48.5	47.7	47.8	49.6
75,0°	415.5	386.9	326.1	231.4	141.2	86.0	60.7	50.0	44.1	40.5	38.4	37.2	37.1	37.4	38.3
77,5°	334.1	328.0	299.2	241.7	154.5	82.0	48.4	36.8	31.1	28.1	26.7	25.5	25.2	25.7	26.4
80,0°	211.1	214.2	200.9	168.0	117.3	62.4	29.3	20.8	17.4	15.4	14.2	13.9	13.9	14.3	13.9
82,5°	78.3	80.0	78.5	71.8	58.2	35.0	15.2	8.8	7.4	6.4	5.7	5.3	5.4	5.7	5.6
85,0°	3.8	3.8	4.0	4.1	4.3	4.2	3.4	2.7	2.4	2.3	2.1	2.0	1.9	1.8	1.7
87,5°	1.9	1.8	1.8	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	0.2	0.2
2,5°	141.8	141.8	141.8	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.9	141.9	1.7	1.9
5,0°	139.8	139.7	139.8	139.7	139.7	139.6	139.6	139.7	139.6	139.6	139.7	139.7	139.6	3.4	5.3
7,5°	137.7	137.5	137.4	137.2	137.1	137.0	136.8	136.7	136.7	136.6	136.6	136.6	136.6	5.1	10.4
10,0°	134.7	134.5	134.1	133.9	133.6	133.5	133.3	133.2	133.2	133.2	133.1	133.1	133.2	6.7	17.1
12,5°	132.3	131.9	131.5	131.1	130.8	130.5	130.2	130.0	129.9	129.8	129.8	129.7	129.8	8.3	25.5
15,0°	129.2	128.7	128.1	127.7	127.4	127.2	127.0	126.9	127.0	127.0	127.1	127.2	127.2	9.9	35.3
17,5°	126.8	126.2	125.5	125.1	124.6	124.3	124.2	124.0	124.0	123.9	124.0	123.9	123.9	11.4	46.7
20,0°	124.7	124.2	123.5	122.9	122.3	121.8	121.4	121.1	120.9	120.8	120.8	120.8	120.8	12.9	59.6
22,5°	122.4	121.8	121.2	120.6	119.8	119.1	118.5	118.1	117.8	117.6	117.6	117.5	117.4	14.4	74.0
25,0°	119.7	119.1	118.3	117.7	116.9	116.1	115.6	115.1	114.5	114.3	114.2	114.1	114.2	15.9	89.9
27,5°	117.0	116.1	115.3	114.7	113.9	113.2	112.5	111.8	111.1	110.6	110.3	110.1	110.1	17.3	107.2
30,0°	114.3	113.3	112.4	111.5	110.7	110.0	109.2	108.5	107.8	107.0	106.6	106.5	106.4	18.6	125.8
32,5°	111.8	110.6	109.5	108.5	107.6	106.7	105.9	105.2	104.4	103.6	103.1	102.7	102.7	20.0	145.8
35,0°	109.1	107.8	106.6	105.6	104.4	103.3	102.3	101.5	100.6	99.6	98.8	98.2	98.1	21.4	167.2
37,5°	106.5	105.1	103.7	102.4	101.0	99.3	98.0	96.9	95.9	94.8	93.8	93.0	92.8	22.8	190.0
40,0°	103.2	101.4	99.7	98.0	96.0	93.8	92.0	90.9	89.8	88.6	87.6	86.9	86.8	24.7	214.6
42,5°	98.6	96.1	93.4	90.9	88.6	86.1	84.7	83.9	82.1	80.4	79.4	78.7	78.7	26.6	241.3
45,0°	92.8	89.4	86.2	83.0	80.4	77.9	76.4	75.7	74.4	73.1	72.5	71.9	71.7	28.4	269.7
47,5°	90.8	87.5	84.4	82.0	80.0	78.3	77.1	77.0	76.7	76.5	76.6	76.5	76.4	31.1	300.7
50,0°	95.5	94.6	94.8	96.3	98.8	101.6	104.9	109.2	112.6	115.5	117.9	119.1	119.4	35.8	336.5
52,5°	97.6	100.0	104.4	110.6	118.5	126.5	134.5	142.9	149.7	155.3	159.0	161.2	161.7	41.6	378.2
55,0°	96.1	101.2	108.2	117.3	128.1	139.3	149.5	159.6	168.4	174.7	179.0	181.7	182.0	50.3	428.5
57,5°	92.0	97.7	105.7	115.2	125.6	137.4	147.7	156.0	164.1	168.5	171.3	173.0	173.5	62.1	490.5
60,0°	86.4	92.0	99.3	107.9	116.7	125.7	134.1	140.1	144.4	147.1	148.2	148.8	148.9	73.7	564.2
62,5°	82.3	86.6	92.5	98.5	103.8	108.3	112.0	113.8	113.3	112.8	111.5	109.6	109.0	81.0	645.2
65,0°	77.0	80.1	84.5	88.9	92.5	94.7	96.5	96.0	94.6	92.1	89.7	87.9	86.8	81.9	727.1
67,5°	71.0	74.2	78.2	81.7	83.6	84.2	84.2	82.0	79.9	77.4	74.4	72.9	71.2	75.6	802.6
70,0°	62.4	65.9	69.3	72.3	71.9	69.4	67.1	62.8	60.2	56.1	54.8	52.6	50.9	64.8	867.5
72,5°	51.7	55.1	56.3	57.8	55.6	52.7	49.5	43.5	40.9	37.7	40.4	36.4	33.9	51.4	918.8
75,0°	40.3	40.8	40.7	39.5	38.9	34.0	24.1	14.9	12.9	12.3	18.1	12.0	11.0	38.4	957.2
77,5°	26.4	26.6	26.8	23.3	15.7	8.2	7.0	6.6	6.4	5.6	5.3	4.7	4.7	25.3	982.6
80,0°	14.0	13.2	11.4	6.5	4.5	4.0	3.4	3.2	3.0	2.4	1.9	1.7	1.8	12.1	994.7
82,5°	5.4	4.7	3.5	2.7	2.4	2.1	1.9	1.7	1.5	1.2	1.1	1.1	1.0	4.2	998.8
85,0°	1.5	1.5	1.4	1.2	1.2	1.1	1.0	0.9	0.9	0.7	0.7	0.7	0.6	0.8	999.6
87,5°	1.0	1.0	0.9	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9290	70.9	75.1	73.0
95	241	252	8815	65.9	69.9	67.9
90	229	250	8376	61.6	65.2	63.4
85	216	248	7900	57.1	60.5	58.8
80	203	246	7425	52.8	55.8	54.3
75	190	243	6949	48.7	51.5	50.1
70	178	241	6510	45.0	47.5	46.2
65	165	238	6035	41.1	43.5	42.3
60	152	235	5559	37.4	39.5	38.4
55	140	232	5120	34.2	36.0	35.1
50	127	229	4645	30.7	32.3	31.5
45	114	225	4170	27.5	28.8	28.2
40	102	221	3731	24.4	25.6	25.0
35	89	216	3255	21.2	22.3	21.8
30	76	210	2780	18.2	19.1	18.6
25	63	203	2304	15.3	16.0	15.6
20	51	195	1865	12.7	13.3	13.0
15	38	184	1390	9.9	10.3	10.1
11	27	172	988	7.8	8.0	7.9

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9290	68.9	71.9	70.4
95	241	252	8815	64.4	67.1	65.8
90	229	250	8376	60.3	62.9	61.6
85	216	248	7900	56.1	58.4	57.2
80	203	246	7425	52.0	54.1	53.0
75	190	243	6949	48.0	50.0	49.0
70	178	241	6510	44.4	46.3	45.3
65	165	238	6035	40.8	42.4	41.6
60	152	235	5559	37.2	38.6	37.9
55	140	232	5120	33.9	35.3	34.6
50	127	229	4645	30.6	31.8	31.2
45	114	225	4170	27.3	28.3	27.8
40	102	221	3731	24.4	25.3	24.8
35	89	216	3255	21.2	22.1	21.6
30	76	210	2780	18.2	18.9	18.5
25	63	203	2304	15.4	15.9	15.6
20	51	195	1865	12.7	13.2	13.0
15	38	184	1390	9.9	10.2	10.0
11	27	172	988	8.0	8.1	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9290	69.7	72.8	71.2
95	241	252	8815	65.0	67.8	66.4
90	229	250	8376	60.8	63.5	62.2
85	216	248	7900	56.5	58.8	57.6
80	203	246	7425	52.4	54.4	53.4
75	190	243	6949	48.3	50.2	49.2
70	178	241	6510	44.6	46.4	45.5
65	165	238	6035	40.9	42.5	41.7
60	152	235	5559	37.3	38.7	38.0
55	140	232	5120	34.0	35.3	34.6
50	127	229	4645	30.6	31.8	31.2
45	114	225	4170	27.3	28.3	27.8
40	102	221	3731	24.3	25.2	24.8
35	89	216	3255	21.2	22.0	21.6
30	76	210	2780	18.2	18.8	18.5
25	63	203	2304	15.3	15.8	15.6
20	51	195	1865	12.7	13.1	12.9
15	38	184	1390	10.0	10.2	10.1
11	27	172	988	7.9	8.0	8.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2P31G08HB EAN: 4058352726167	LP number 59337_231
--	--	--------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9290.0	70.9
5.0	9290.0	68.9
15.0	9290.0	69.7