

Photometric test report

Family
Streetlight 21 midi easy LED

Order number: 5XE7C63A08NB
EAN: 4058352731048

LP number
59082_135



Version post-top or side-entry mounting
Optic asymmetric, wide distribution (ST0.8a G)
Cover toughened safety glass
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG DIM
Rated values Net luminous flux = 20350 lm
 Power consumption = 151.2 W
 Luminous efficacy = 134.6 lm/W

serial
documentation
23.08.2022

sITECO

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 536 cd/klm

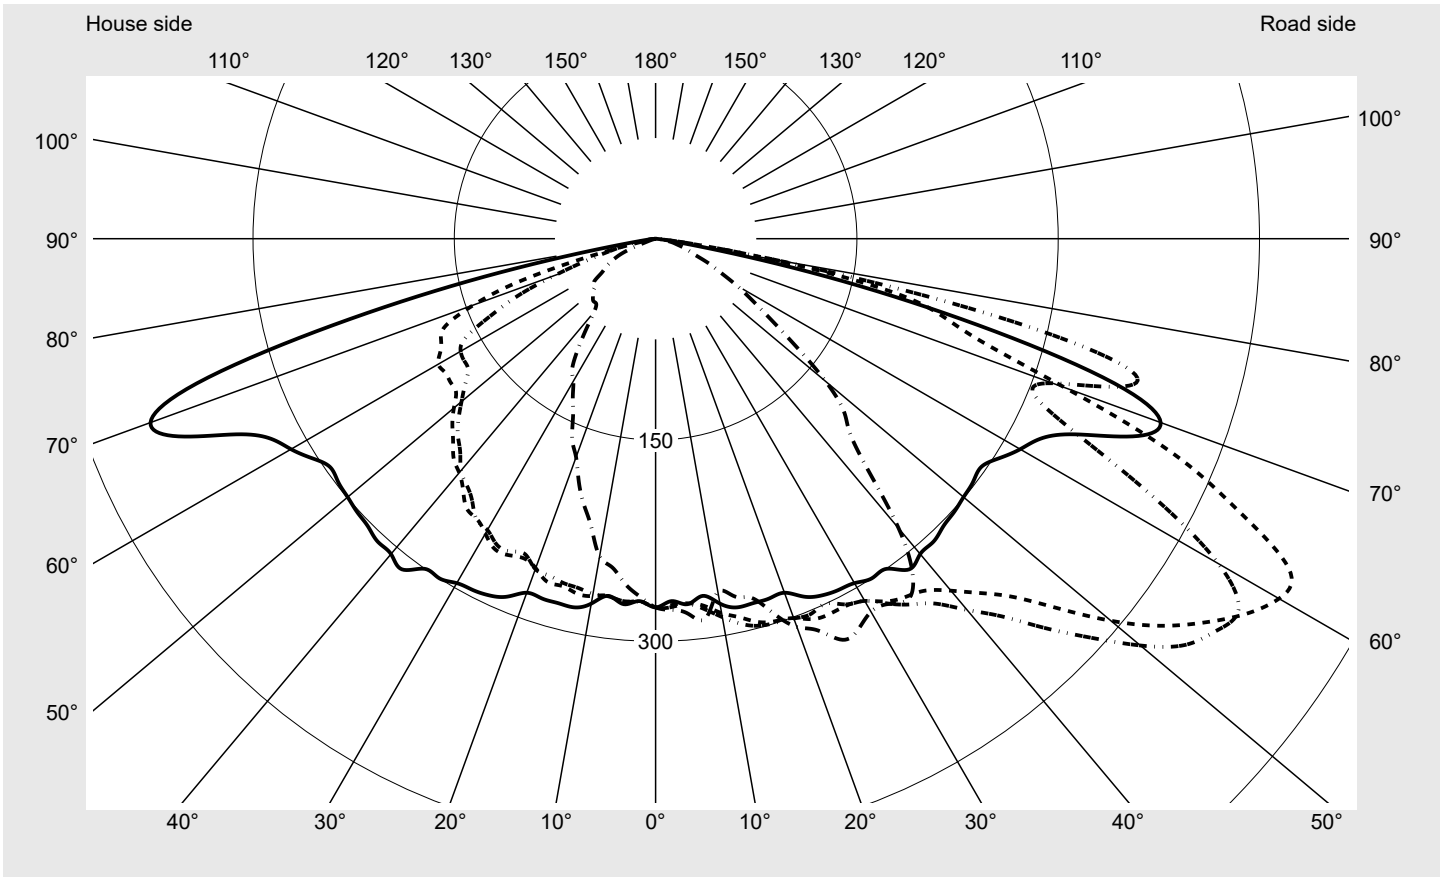

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	493.9
Imax 80°	97.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
---	--	-------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

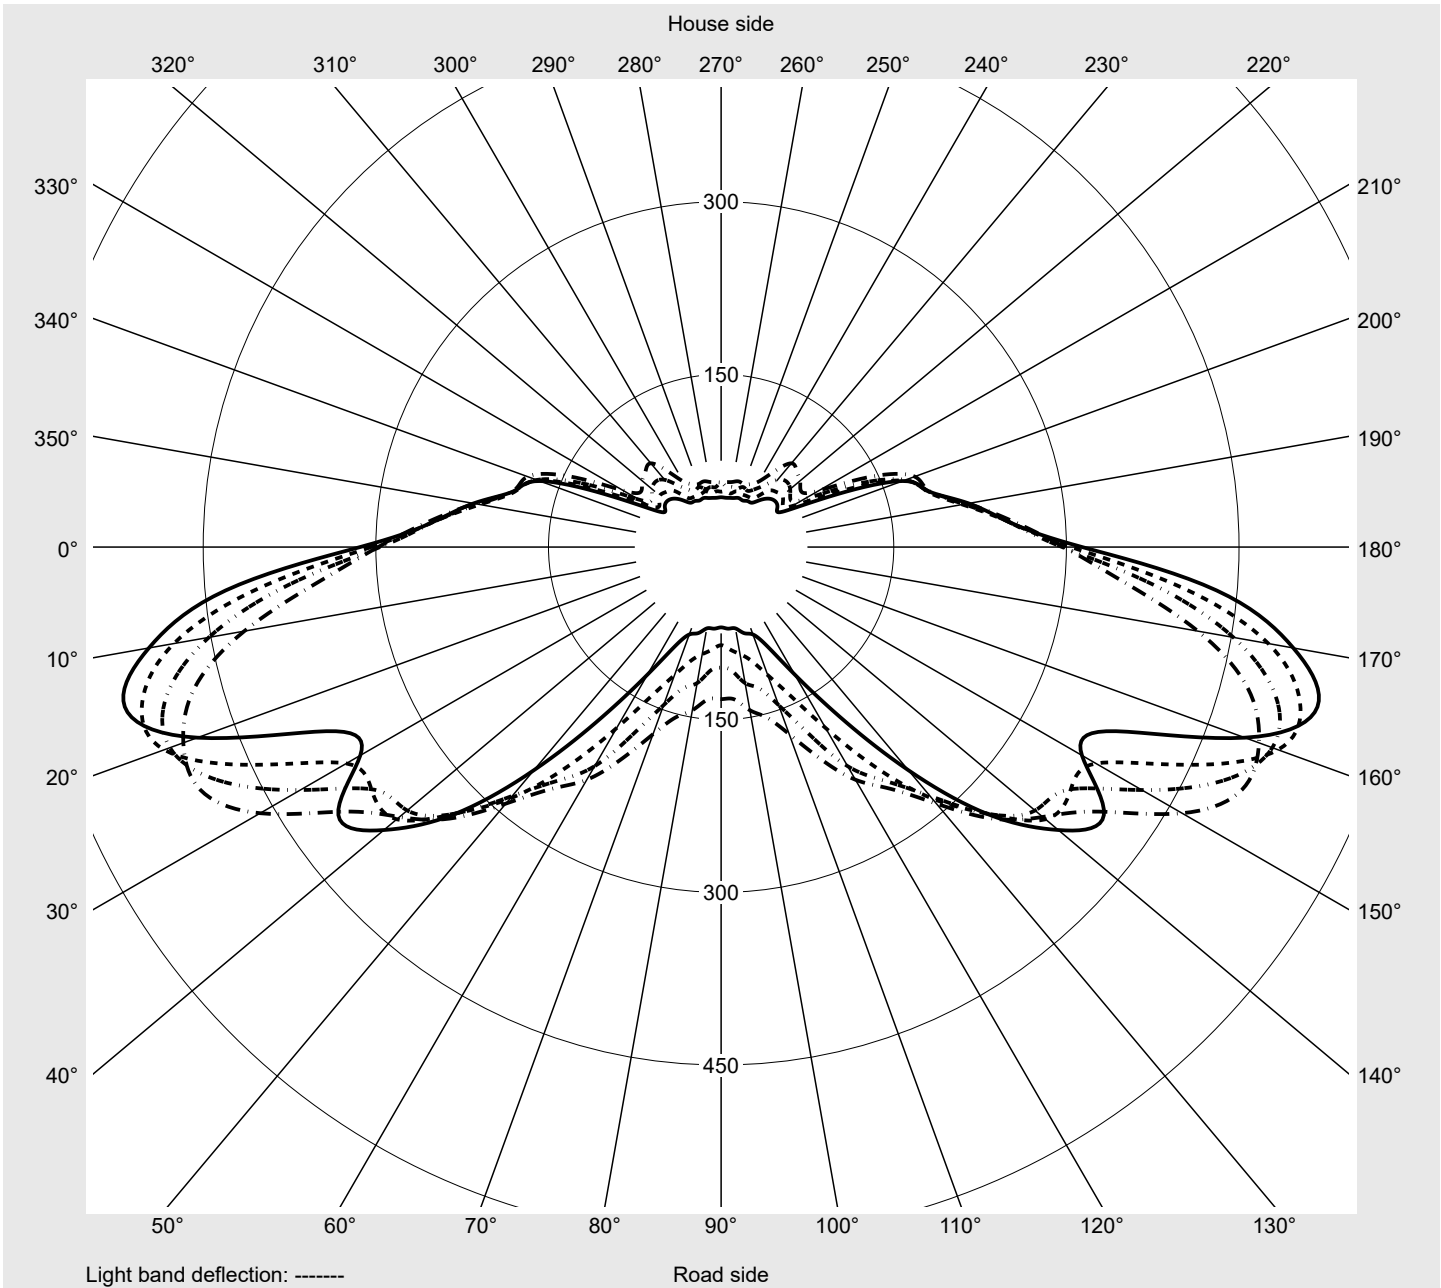

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	270.3	270.4	271.5	273.2	274.7	274.7	274.1	274.2	274.4	274.0	277.0	277.1	276.6
5,0°	273.4	274.3	273.6	272.7	273.3	272.3	273.5	276.6	278.8	280.3	282.6	283.8	283.6
7,5°	268.4	272.0	274.5	275.9	278.4	281.1	280.9	281.1	283.3	281.4	281.4	282.2	283.4
10,0°	276.1	275.9	278.7	283.3	286.3	286.9	286.0	284.7	284.2	281.9	279.6	277.1	277.3
12,5°	281.3	282.2	283.7	288.9	293.9	293.8	293.7	291.9	286.3	284.1	279.7	275.7	274.4
15,0°	281.1	288.0	292.4	295.7	298.6	296.0	289.7	288.1	284.8	282.9	277.7	276.9	276.0
17,5°	281.1	290.6	297.2	298.7	299.8	298.7	288.5	285.6	284.8	283.6	284.4	283.4	282.6
20,0°	280.7	292.1	296.6	300.8	301.1	293.8	288.4	289.1	289.4	289.7	292.3	294.8	294.6
22,5°	288.7	295.6	305.2	306.8	302.6	291.6	294.7	298.4	296.3	302.0	304.4	307.3	310.9
25,0°	293.3	302.1	310.2	308.2	300.0	304.4	300.3	306.0	314.5	315.8	322.6	327.6	328.1
27,5°	295.1	304.0	315.6	308.2	307.2	309.0	311.5	316.2	322.4	331.3	341.0	342.3	347.8
30,0°	296.3	310.5	318.6	311.7	311.7	317.3	321.0	328.4	335.1	348.1	357.8	362.2	361.1
32,5°	300.0	316.4	321.2	320.4	322.3	332.0	333.6	347.0	358.3	367.3	373.3	381.7	372.6
35,0°	300.3	319.7	321.7	325.6	332.6	343.0	357.1	367.9	377.8	390.3	388.6	387.7	369.4
37,5°	310.5	323.4	327.5	330.5	342.7	360.8	372.5	392.7	414.1	412.2	402.6	386.6	372.5
40,0°	306.7	330.8	334.6	342.4	361.1	375.6	400.5	408.6	435.7	427.5	406.4	389.1	370.1
42,5°	306.3	335.9	340.9	358.1	381.7	400.9	421.0	435.6	445.3	435.6	399.0	382.7	355.5
45,0°	303.2	331.0	352.9	377.7	410.2	434.3	445.3	455.7	442.6	423.9	389.8	341.8	303.3
47,5°	301.6	336.5	377.0	408.1	440.1	460.6	469.6	457.4	422.0	387.5	349.8	300.0	258.6
50,0°	299.6	347.6	392.2	442.9	471.5	482.6	470.8	441.6	392.0	354.8	309.2	269.5	243.1
52,5°	298.1	351.8	420.7	473.8	497.3	499.2	462.5	400.7	364.8	333.6	290.9	256.4	233.4
55,0°	296.4	377.3	452.0	498.7	509.7	480.6	422.2	367.6	356.1	327.6	282.3	247.9	219.8
57,5°	304.1	401.5	482.8	520.7	515.0	447.7	376.1	370.2	367.9	327.8	285.1	233.0	181.5
60,0°	313.7	432.1	504.8	536.4	484.2	378.6	362.0	406.0	382.5	328.5	253.1	180.4	127.9
62,5°	323.0	454.5	522.9	531.9	420.3	344.5	406.4	437.2	400.9	298.6	180.8	103.7	72.0
65,0°	344.9	474.6	534.2	478.7	349.3	355.5	461.5	463.3	369.4	197.1	86.0	60.4	50.6
67,5°	384.9	502.1	523.3	416.2	305.9	418.2	501.2	453.1	243.9	95.6	57.8	47.3	41.7
70,0°	400.5	466.7	464.5	324.8	314.9	493.9	484.0	328.4	125.6	60.9	45.2	38.8	34.8
72,5°	358.5	358.7	351.8	254.6	365.9	485.2	394.2	184.1	76.3	45.4	33.5	30.2	27.1
75,0°	248.8	218.0	225.7	220.3	356.9	392.4	267.8	98.5	34.6	31.5	29.4	24.9	21.7
77,5°	130.6	113.0	145.7	175.3	240.1	233.3	127.5	42.6	21.2	23.4	23.0	16.7	15.6
80,0°	34.5	28.3	60.6	84.1	88.8	97.8	40.6	17.8	14.2	16.4	14.0	11.1	11.6
82,5°	7.5	5.6	9.8	16.6	21.5	20.4	10.9	7.9	8.8	8.6	8.9	5.8	7.0
85,0°	1.1	1.2	1.1	1.3	1.4	1.9	2.3	2.1	2.2	2.7	3.5	2.8	2.3
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.8	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7
2,5°	277.3	277.3	277.6	276.6	277.0	276.8	270.8	271.1	270.4	270.8	270.2	268.3	267.7
5,0°	281.9	281.9	278.2	280.1	281.1	280.6	273.6	273.0	271.7	271.1	269.1	268.2	265.4
7,5°	283.5	282.9	281.4	281.0	282.1	285.4	268.8	268.8	268.5	268.8	266.7	267.0	264.4
10,0°	279.2	274.9	270.8	268.5	269.2	267.3	274.9	272.6	270.4	268.7	265.5	260.5	259.1
12,5°	272.1	272.1	273.6	269.2	269.2	273.1	277.7	274.5	270.9	266.6	261.3	260.1	257.8
15,0°	276.2	274.6	273.2	280.0	279.6	277.2	274.9	270.0	268.0	265.6	261.1	253.1	248.9
17,5°	285.8	287.0	285.3	286.6	289.2	292.9	272.7	272.3	268.1	263.3	259.7	253.3	247.5
20,0°	299.1	299.4	301.3	300.1	304.9	307.8	276.8	266.0	261.2	262.0	255.9	246.8	236.8
22,5°	313.3	316.0	319.4	316.6	317.2	315.9	280.7	268.4	257.6	254.4	250.0	238.1	227.3
25,0°	332.9	331.7	329.1	327.2	327.4	329.8	278.2	269.4	260.1	257.0	246.4	228.9	216.0
27,5°	347.9	343.4	339.0	334.3	330.1	327.7	279.9	264.3	260.3	256.8	239.8	225.1	209.4
30,0°	360.9	348.0	335.3	330.2	324.7	321.0	279.0	262.4	253.7	250.7	238.4	217.0	198.0
32,5°	362.6	347.1	334.4	330.4	326.1	322.8	284.1	262.1	247.8	248.2	226.8	210.6	193.3
35,0°	356.8	346.6	334.7	336.8	328.1	328.1	280.8	258.0	245.4	238.4	219.8	203.2	186.8
37,5°	357.5	341.5	333.2	324.9	314.7	314.6	279.2	255.9	235.7	231.4	214.7	193.6	178.6
40,0°	343.5	323.7	301.8	292.7	285.0	281.8	278.8	246.9	227.6	225.6	204.9	186.4	162.2
42,5°	311.3	283.7	259.6	245.5	240.5	235.1	275.8	245.2	222.6	215.5	197.8	175.8	147.6
45,0°	263.6	240.0	225.9	210.9	205.5	204.7	269.5	235.2	213.4	208.3	188.9	160.6	131.2
47,5°	233.5	212.2	205.2	196.9	185.3	190.2	264.3	230.8	205.4	199.3	173.8	140.3	115.6
50,0°	214.5	200.5	186.8	176.0	167.7	165.6	259.0	220.9	196.2	188.8	159.4	120.1	101.4
52,5°	202.4	173.0	153.3	144.0	132.9	132.1	254.9	217.3	187.5	179.0	145.3	98.1	84.8
55,0°	178.1	146.2	127.0	120.0	107.8	104.8	250.8	214.4	186.5	170.5	129.2	82.5	73.4
57,5°	142.5	118.4	102.4	94.4	89.3	85.3	251.0	212.9	185.8	169.2	115.7	71.1	65.4
60,0°	95.2	80.8	77.5	71.8	71.2	69.8	251.1	218.4	187.0	167.7	103.8	61.3	59.6
62,5°	58.0	54.8	52.2	54.7	53.3	54.6	253.1	214.1	180.6	159.5	93.9	56.2	53.4
65,0°	44.4	44.5	46.9	43.2	43.6	44.1	259.8	218.3	176.5	135.3	87.7	51.0	49.2
67,5°	38.9	35.1	35.0	34.1	33.4	32.4	277.4	228.7	169.2	111.0	72.7	44.8	40.8
70,0°	31.2	27.0	26.8	26.1	26.1	26.6	284.4	224.8	144.3	80.0	58.1	39.0	36.7
72,5°	24.4	22.5	22.5	20.4	21.1	21.5	265.5	198.7	107.9	53.5	43.1	34.7	32.8
75,0°	18.8	17.1	17.9	17.0	16.6	16.3	204.9	133.2	50.6	34.4	32.4	29.0	26.8
77,5°	14.7	13.5	12.8	12.5	12.8	12.8	119.2	54.2	11.6	23.6	21.2	18.0	18.4
80,0°	10.6	10.1	9.1	8.6	8.6	8.1	33.5	11.1	7.6	13.9	11.9	10.5	10.2
82,5°	7.3	6.2	6.1	5.6	4.9	5.4	5.5	2.7	2.8	3.8	4.3	3.5	2.3
85,0°	3.5	3.6	2.8	2.5	2.0	2.1	1.1	1.0	0.9	0.9	0.8	0.7	0.4
87,5°	0.7	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	274.7	0.4	0.4
2,5°	266.9	268.1	268.2	268.7	268.5	267.1	267.0	267.7	267.4	266.6	267.0	3.3	3.7
5,0°	263.6	262.9	262.0	260.1	259.5	259.0	256.6	256.8	259.2	257.8	258.3	6.5	10.1
7,5°	260.8	257.0	250.7	249.7	247.6	246.8	246.7	245.8	245.3	247.7	247.1	9.6	19.8
10,0°	252.8	249.3	247.8	246.7	248.4	244.5	243.4	240.2	241.8	240.9	240.4	12.7	32.4
12,5°	253.4	252.4	245.5	238.4	237.7	235.4	233.8	229.5	224.3	224.0	220.7	15.7	48.2
15,0°	244.8	237.8	231.9	225.9	220.6	215.3	208.8	208.3	207.9	205.7	205.7	18.5	66.7
17,5°	234.5	223.9	215.9	208.8	204.9	202.3	197.0	195.4	195.9	193.7	190.2	21.4	88.1
20,0°	225.2	218.0	205.4	199.6	193.3	189.7	186.4	179.5	178.4	175.2	173.3	24.2	112.4
22,5°	216.7	204.6	199.4	191.6	182.0	178.9	173.7	168.4	165.9	162.8	162.3	27.2	139.6
25,0°	204.9	195.2	187.0	178.8	174.1	164.7	158.3	153.2	148.3	147.1	145.5	30.2	169.8
27,5°	196.3	186.4	178.9	166.9	161.7	149.4	143.4	139.0	134.8	135.6	133.7	33.1	202.9
30,0°	190.9	177.5	163.1	156.2	146.5	137.9	134.3	127.6	124.1	121.6	122.6	35.7	238.6
32,5°	181.0	165.6	154.2	144.9	134.1	130.0	128.2	124.1	121.8	116.9	115.9	38.6	277.2
35,0°	167.7	157.4	146.1	134.8	131.4	126.8	124.8	120.5	110.3	104.9	101.4	41.3	318.5
37,5°	156.7	145.7	133.9	129.2	129.2	125.7	115.5	103.4	94.2	86.0	85.0	43.7	362.2
40,0°	146.9	134.3	126.9	126.3	125.9	115.4	98.8	88.6	77.3	72.8	71.3	45.3	407.5
42,5°	136.5	122.6	122.7	123.6	114.3	99.3	84.3	75.2	69.8	69.3	65.6	46.2	453.8
45,0°	120.9	117.7	119.9	119.0	104.2	85.2	72.0	67.4	65.3	64.5	65.6	46.5	500.3
47,5°	109.1	110.0	113.2	107.7	88.8	73.6	66.8	64.8	64.8	63.5	63.4	46.7	547.0
50,0°	97.5	101.6	105.2	92.5	74.5	65.6	61.9	61.6	59.1	61.3	61.0	46.7	593.7
52,5°	89.6	92.9	95.0	80.0	65.9	60.3	58.1	59.1	57.5	56.6	56.1	46.3	640.0
55,0°	78.3	80.4	76.2	65.5	57.9	54.0	55.5	52.2	52.9	52.4	56.0	45.7	685.7
57,5°	69.5	67.7	63.9	52.8	49.8	49.5	49.4	50.2	47.3	48.6	48.1	45.3	730.9
60,0°	61.6	59.4	53.6	47.0	46.1	44.6	45.2	44.1	43.4	43.0	43.3	44.1	775.0
62,5°	55.6	50.3	44.1	41.3	40.6	40.9	40.9	39.6	40.9	39.1	37.9	42.3	817.3
65,0°	46.5	42.0	38.0	35.8	35.8	36.1	35.5	33.9	31.7	32.0	31.7	40.2	857.5
67,5°	39.5	36.1	31.5	29.7	29.9	29.1	27.9	25.5	23.3	22.3	22.6	38.2	895.8
70,0°	34.2	29.3	27.2	25.7	24.5	22.3	19.1	14.7	12.3	10.1	9.4	34.5	930.3
72,5°	27.0	24.4	22.8	20.1	17.7	12.1	9.4	6.3	4.4	4.3	4.3	28.9	959.1
75,0°	21.4	18.1	16.5	13.1	8.9	5.4	3.9	2.7	2.0	1.9	2.4	21.1	980.3
77,5°	15.3	10.9	8.3	5.4	3.5	2.1	1.3	1.0	0.9	1.0	1.4	12.6	992.9
80,0°	7.1	3.9	2.2	1.4	0.8	0.5	0.4	0.4	0.3	0.4	0.4	5.2	998.0
82,5°	1.4	0.6	0.3	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	1.5	999.6
85,0°	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
---	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	20350	151.2	156.8	154.0
95	94	19343	142.1	147.2	144.6
90	88	18303	133.1	137.9	135.5
85	82	17242	124.1	128.5	126.3
80	77	16332	116.5	120.7	118.6
75	71	15212	107.5	111.3	109.4
70	66	14262	100.2	103.6	101.9
65	61	13299	92.7	96.1	94.4
60	55	12117	83.9	86.8	85.4
55	50	11116	76.7	79.3	78.0
50	45	10096	69.5	71.7	70.6
45	40	9058	62.2	64.2	63.2
40	36	8212	56.4	58.2	57.3
35	31	7143	49.1	50.7	49.9
30	26	6055	41.9	43.3	42.6
25	22	5171	36.2	37.3	36.8
20	17	4054	29.1	30.0	29.6
15	13	3146	23.4	24.0	23.7
12	10	2460	19.2	19.7	19.4

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	21020	153.0	158.7	155.8
95	94	19947	143.9	149.0	146.4
90	88	18845	134.7	139.6	137.1
85	83	17913	127.1	131.7	129.4
80	77	16768	118.0	122.2	120.1
75	72	15792	110.5	114.4	112.4
70	67	14805	103.0	106.6	104.8
65	61	13604	94.0	97.4	95.7
60	56	12584	86.6	89.6	88.1
55	51	11552	79.3	82.0	80.6
50	46	10502	71.9	74.3	73.1
45	41	9437	64.5	66.7	65.6
40	36	8354	57.2	59.1	58.2
35	31	7259	49.9	51.4	50.6
30	27	6372	44.1	45.5	44.8
25	22	5247	36.8	37.9	37.3
20	17	4110	29.5	30.4	30.0
15	13	3187	23.8	24.4	24.1
12	10	2490	19.5	20.0	19.8

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
---	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	20710	152.1	157.7	154.9
95	94	19668	143.0	148.1	145.6
90	88	18596	133.9	138.7	136.3
85	83	17686	126.3	130.8	128.6
80	77	16568	117.2	121.4	119.3
75	72	15612	109.7	113.6	111.6
70	66	14449	100.8	104.3	102.6
65	61	13465	93.4	96.7	95.1
60	56	12463	86.0	89.0	87.5
55	51	11447	78.7	81.4	80.1
50	46	10412	71.4	73.8	72.6
45	41	9361	64.1	66.2	65.2
40	36	8291	56.8	58.7	57.8
35	31	7208	49.5	51.1	50.3
29	26	6106	42.2	43.6	42.9
25	22	5214	36.5	37.6	37.0
20	17	4085	29.3	30.2	29.8
15	13	3169	23.6	24.2	23.9
12	10	2477	19.4	19.9	19.6

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7C63A08NB EAN: 4058352731048	LP number 59082_135
---	--	--------------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	20350.0	151.2
5.0	21020.0	153.0
15.0	20710.0	152.1