


# Photometric test report

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10DL447J3H</b> <b>EAN: 4058352757147</b>	<b>LP number</b> <b>59393_12</b>
	<b>Version</b> prismatic diffuser, opal, PMMA, extremely wide distribution, emergence lighting 3h <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 4330 lm Power consumption = 30.6 W Luminous efficacy = 141.5 lm/W	<b>serial documentation</b> <b>23.02.2023</b>



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 335 cd/klm**

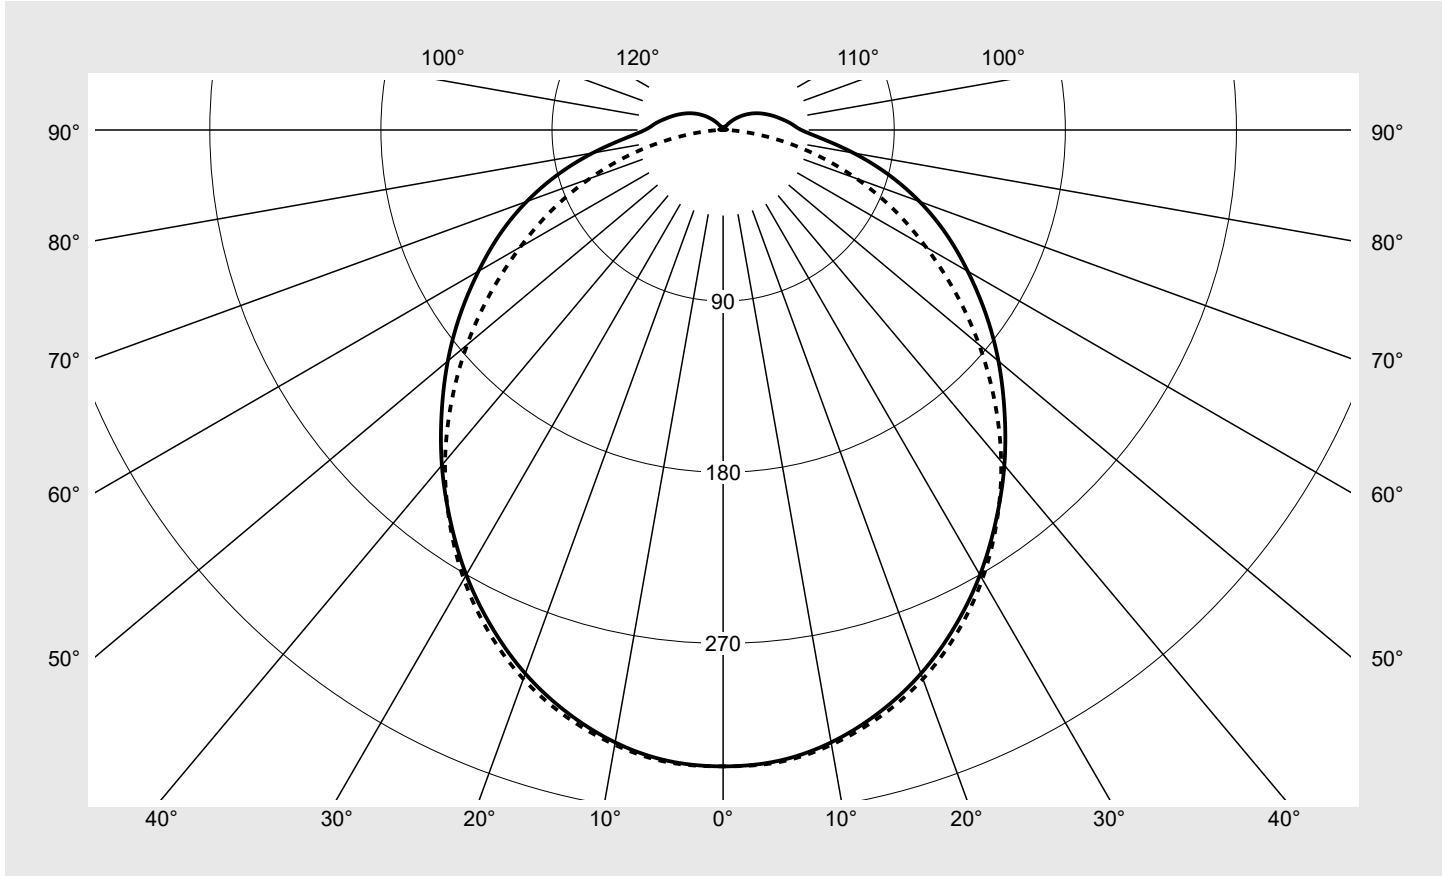

Classifications	
DIN 5040	A 4 1
CIE	N1=46 N2=76 N3=93 N4=94 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	93.9%
$\phi_o$	6.1%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10DL447J3H</b> <b>EAN: 4058352757147</b>	<b>LP number</b> <b>59393_12</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	334.7	334.7	334.7	334.7	334.7	334.7	334.7	2.0	2.0
5°	333.1	333.6	331.1	331.9	332.7	333.2	333.8	15.9	17.9
10°	327.1	327.9	325.6	326.0	327.2	327.9	328.3	31.1	49.0
15°	317.2	318.4	316.4	316.9	317.9	318.6	319.4	45.1	94.1
20°	304.3	305.5	304.0	304.0	305.5	306.0	307.3	57.2	151.3
25°	288.3	289.5	288.3	288.0	289.4	289.8	291.5	67.0	218.3
30°	270.2	271.6	270.4	269.7	270.4	271.0	272.7	74.2	292.5
35°	250.3	251.6	250.4	249.2	249.0	249.3	251.0	78.6	371.1
40°	230.1	230.9	229.3	227.2	226.1	225.6	227.5	80.3	451.4
45°	209.3	209.8	207.4	204.4	202.0	200.5	202.0	79.4	530.9
50°	189.0	188.7	186.0	181.6	177.7	174.7	175.8	76.4	607.2
55°	168.7	168.2	164.8	159.1	153.5	149.2	149.2	71.4	678.6
60°	148.6	147.7	143.7	136.7	130.2	124.3	123.2	64.8	743.4
65°	129.5	127.8	123.0	114.9	108.3	100.8	99.1	57.1	800.4
70°	109.9	108.0	102.2	93.4	85.8	77.4	74.6	48.0	848.4
75°	89.7	87.9	81.7	72.5	63.8	55.3	51.1	38.1	886.5
80°	69.6	67.6	61.9	52.4	43.1	34.0	28.9	27.7	914.2
85°	52.2	49.9	44.6	35.4	25.7	16.3	10.6	18.5	932.7
90°	41.2	39.2	34.0	25.7	16.3	7.4	2.3	13.2	945.9
95°	36.2	34.5	30.1	22.6	13.9	5.6	2.0	11.4	957.3
100°	31.8	30.4	26.2	19.4	11.5	4.0	1.7	9.7	967.1
105°	27.9	26.5	22.5	16.5	9.2	2.5	1.5	8.1	975.2
110°	24.2	22.6	19.2	13.5	6.9	1.5	1.3	6.6	981.8
115°	20.8	19.1	16.0	10.8	4.9	1.4	1.2	5.2	987.0
120°	17.3	15.9	12.9	8.1	3.1	1.3	1.2	4.0	991.0
125°	13.9	12.5	9.8	5.6	1.6	1.3	1.1	2.9	993.8
130°	10.5	9.4	7.0	3.5	1.5	1.3	1.1	2.0	995.8
135°	7.3	6.4	4.4	1.9	1.5	1.2	1.0	1.3	997.1
140°	4.5	3.8	2.3	1.7	1.5	1.2	1.1	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.4	0.4	999.3
160°	1.8	1.8	1.7	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

## Photometric test report

Family <b>Monsun® 21</b>	Order number: <b>51FB10DL447J3H</b> EAN: <b>4058352757147</b>	LP number <b>59393_12</b>
-----------------------------	--	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.5	20.1	21.8	22.1	19.6	21.3	19.9	21.6	21.9
	3H	21.6	23.1	21.9	23.4	23.8	21.0	22.6	21.4	22.9	23.3
	4H	22.4	23.9	22.8	24.2	24.6	21.6	23.1	22.0	23.4	23.8
	6H	23.1	24.5	23.6	24.9	25.3	22.0	23.4	22.4	23.8	24.1
	8H	23.5	24.8	23.9	25.1	25.5	22.2	23.4	22.6	23.8	24.2
	12H	23.8	25.0	24.2	25.4	25.8	22.2	23.4	22.6	23.8	24.2
4H	2H	20.5	21.9	20.8	22.3	22.6	20.3	21.8	20.7	22.1	22.5
	3H	22.5	23.7	22.9	24.1	24.5	22.0	23.2	22.4	23.6	24.0
	4H	23.4	24.6	23.9	25.0	25.4	22.7	23.8	23.1	24.2	24.7
	6H	24.3	25.4	24.8	25.8	26.2	23.2	24.2	23.6	24.6	25.1
	8H	24.8	25.7	25.2	26.1	26.6	23.3	24.3	23.8	24.7	25.2
	12H	25.2	26.0	25.6	26.4	26.9	23.5	24.3	23.9	24.7	25.2
8H	4H	23.8	24.7	24.2	25.1	25.6	23.1	24.0	23.6	24.5	24.9
	6H	24.8	25.6	25.3	26.1	26.6	23.8	24.5	24.3	25.0	25.5
	8H	25.4	26.1	25.9	26.5	27.1	24.0	24.7	24.5	25.2	25.7
	12H	25.9	26.5	26.4	27.0	27.5	24.2	24.8	24.7	25.2	25.8
12H	4H	23.8	24.7	24.3	25.1	25.6	23.2	24.0	23.7	24.5	25.0
	6H	24.9	25.6	25.4	26.1	26.6	23.9	24.6	24.4	25.1	25.6
	8H	25.5	26.1	26.0	26.6	27.1	24.2	24.8	24.7	25.3	25.8

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1299</b>	<b>H(C0) = 21</b>	<b>H(C180) = 21</b>
			<b>B = 87</b>	<b>H(C90) = 21</b>	<b>H(C270) = 21</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		9136.0	9186.6	9235.2	9367.1	9645.2	10077.9	10772.3	
50°		8750.4	8768.5	8807.0	8895.6	9129.5	9526.6	10281.2	
55°		8379.2	8393.6	8400.8	8434.1	8598.1	8968.8	9741.5	
60°		8028.0	8020.5	7999.7	7964.8	8091.8	8387.5	9185.3	
65°		7734.8	7680.4	7610.0	7488.1	7614.7	7829.5	8682.0	
70°		7402.0	7322.1	7167.5	6971.4	7012.0	7135.3	8004.1	
75°		6982.7	6897.2	6679.5	6389.1	6288.6	6339.9	7136.8	
80°		6485.7	6362.2	6117.4	5685.6	5391.5	5192.8	5840.6	
85°		6102.4	5910.1	5634.9	5044.4	4452.6	3785.7	3946.4	


**Photometric test report**

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10DL447J3H</b> <b>EAN: 4058352757147</b>	<b>LP number</b> <b>59393_12</b>
------------------------------------	--	-------------------------------------



**Luminance values in cd/m²**

$\gamma$  65°  
   $\gamma$  70°  
   $\gamma$  75°  
   $\gamma$  80°  
   $\gamma$  85°

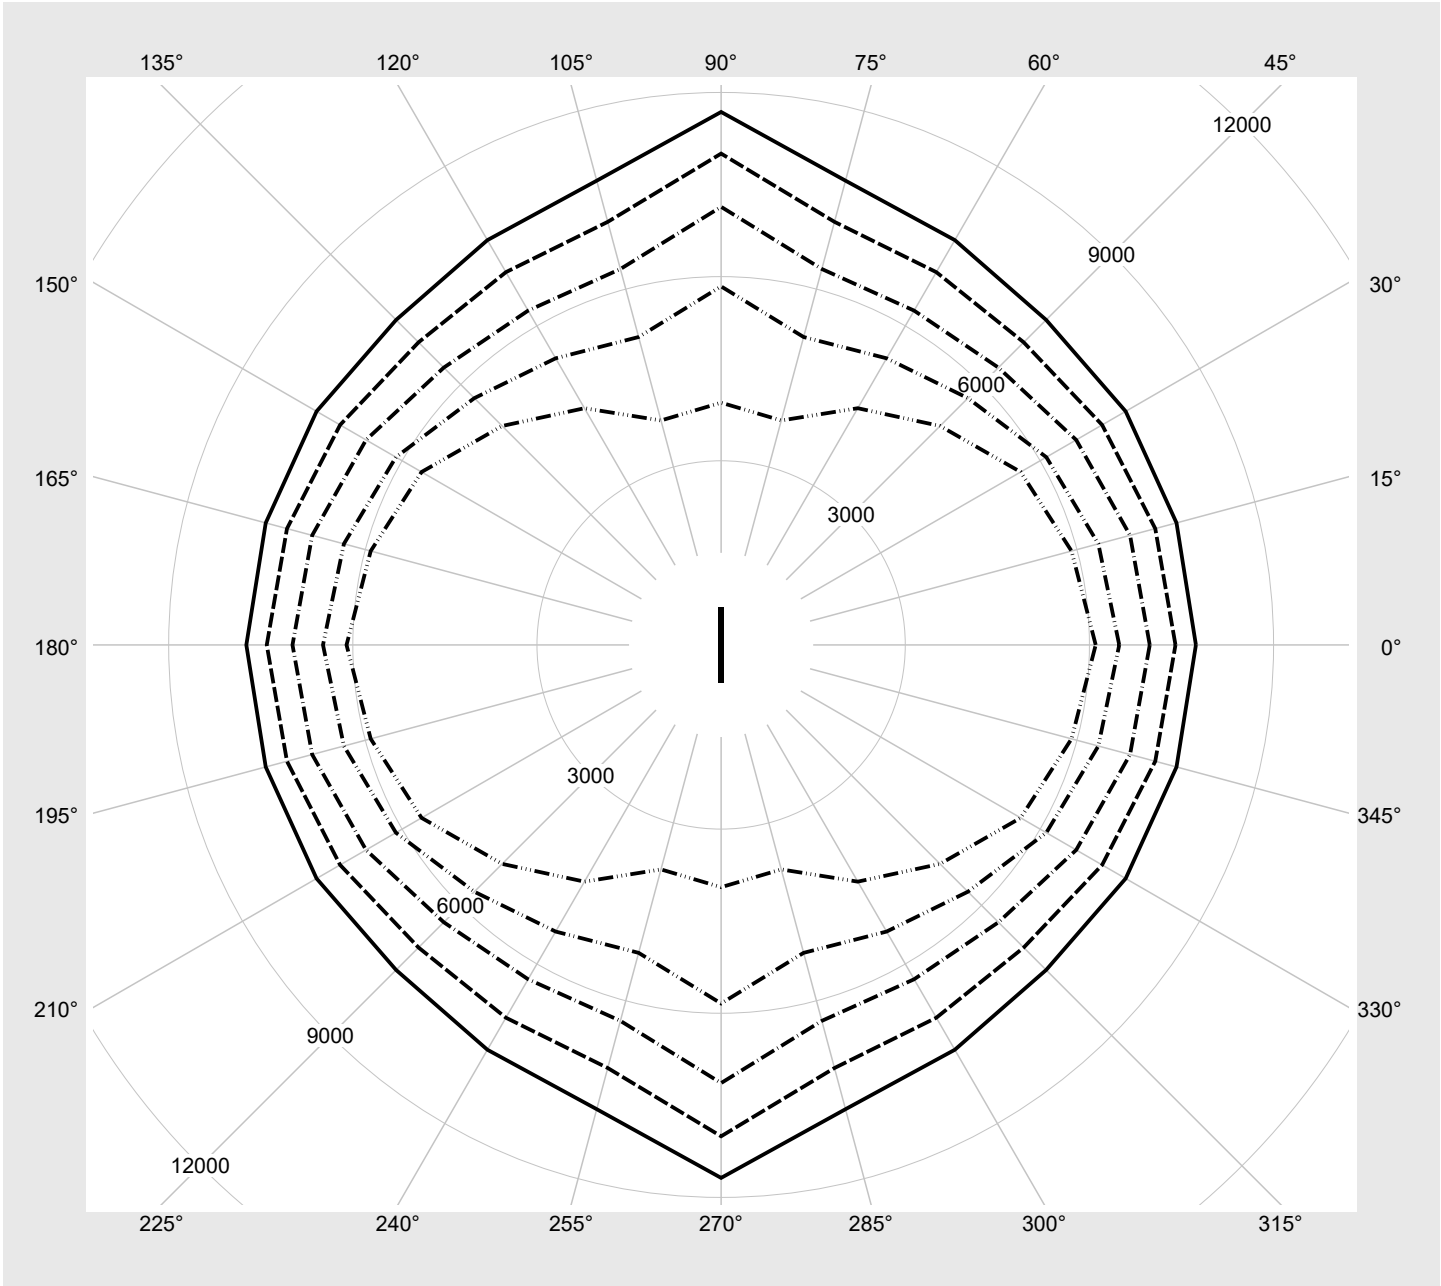

## Photometric test report

<b>Family</b> Monsun® 21	<b>Order number: 51FB10DL447J3H</b> <b>EAN: 4058352757147</b>	<b>LP number</b> 59393_12
-----------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4330	30.6
95	241	252	4118	29.4
90	228	250	3903	28.1
85	214	248	3673	26.6
80	201	245	3458	25.3
75	188	243	3243	24.0
70	175	240	3025	22.7
65	163	238	2822	21.5
60	150	235	2601	20.3
55	137	231	2379	18.9
50	125	228	2173	17.8
45	112	224	1948	16.5
40	100	220	1740	15.3
35	87	215	1514	14.1
30	75	209	1303	12.9
25	62	202	1075	11.7
20	50	194	862	10.5
15	38	184	650	9.4
10	26	171	436	8.3
5	14	148	221	7.1
1	5	110	59	6.1