


Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
	Version standard bracket Optic asymmetric distribution PL61 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 111360 lm Power consumption = 916.8 W Luminous efficacy = 121.5 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 924 cd/klm**

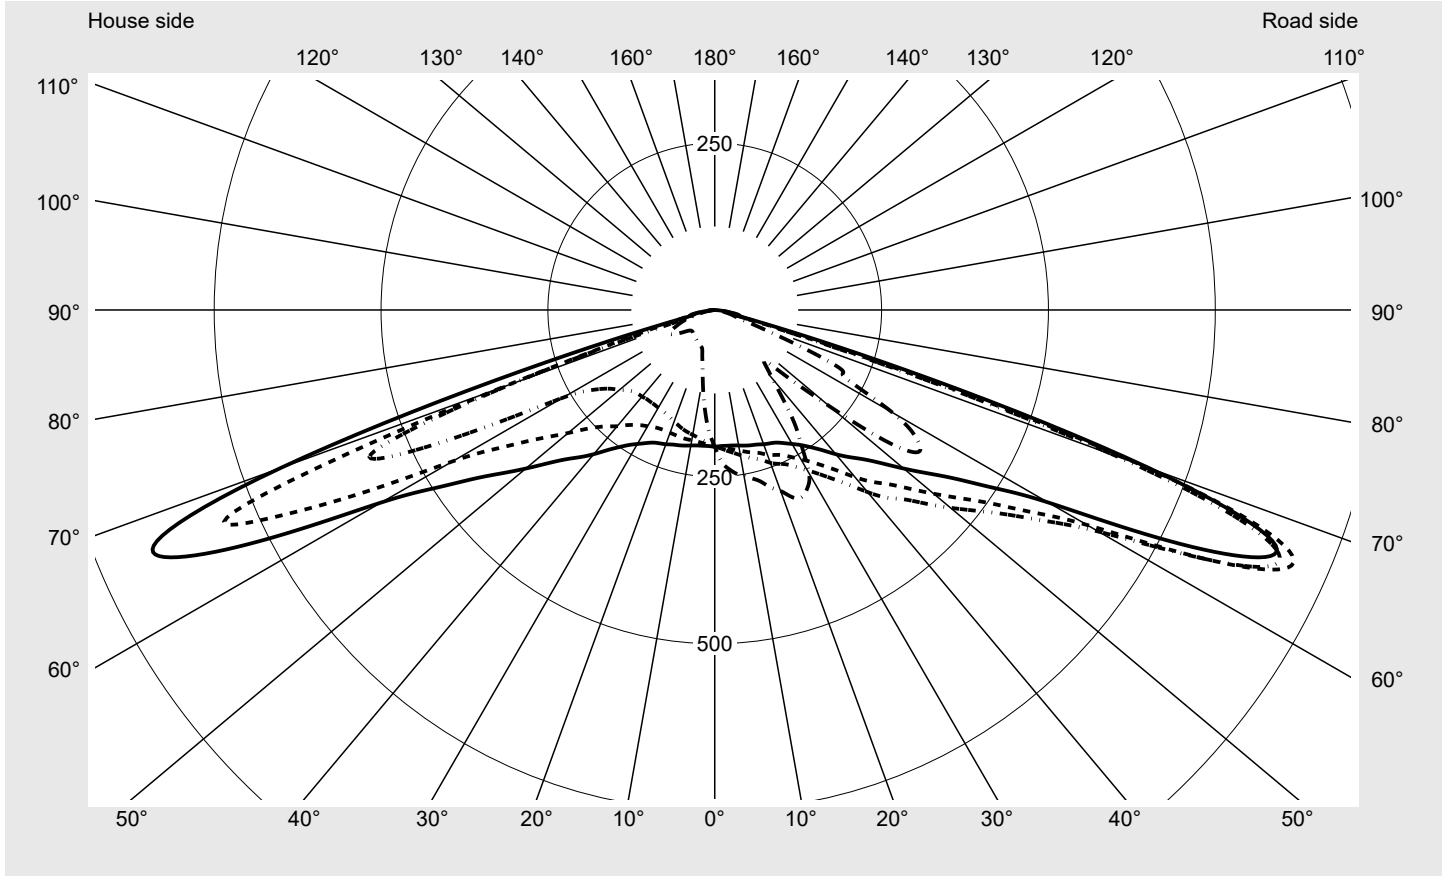

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	692.3
Imax 80°	30.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
----------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

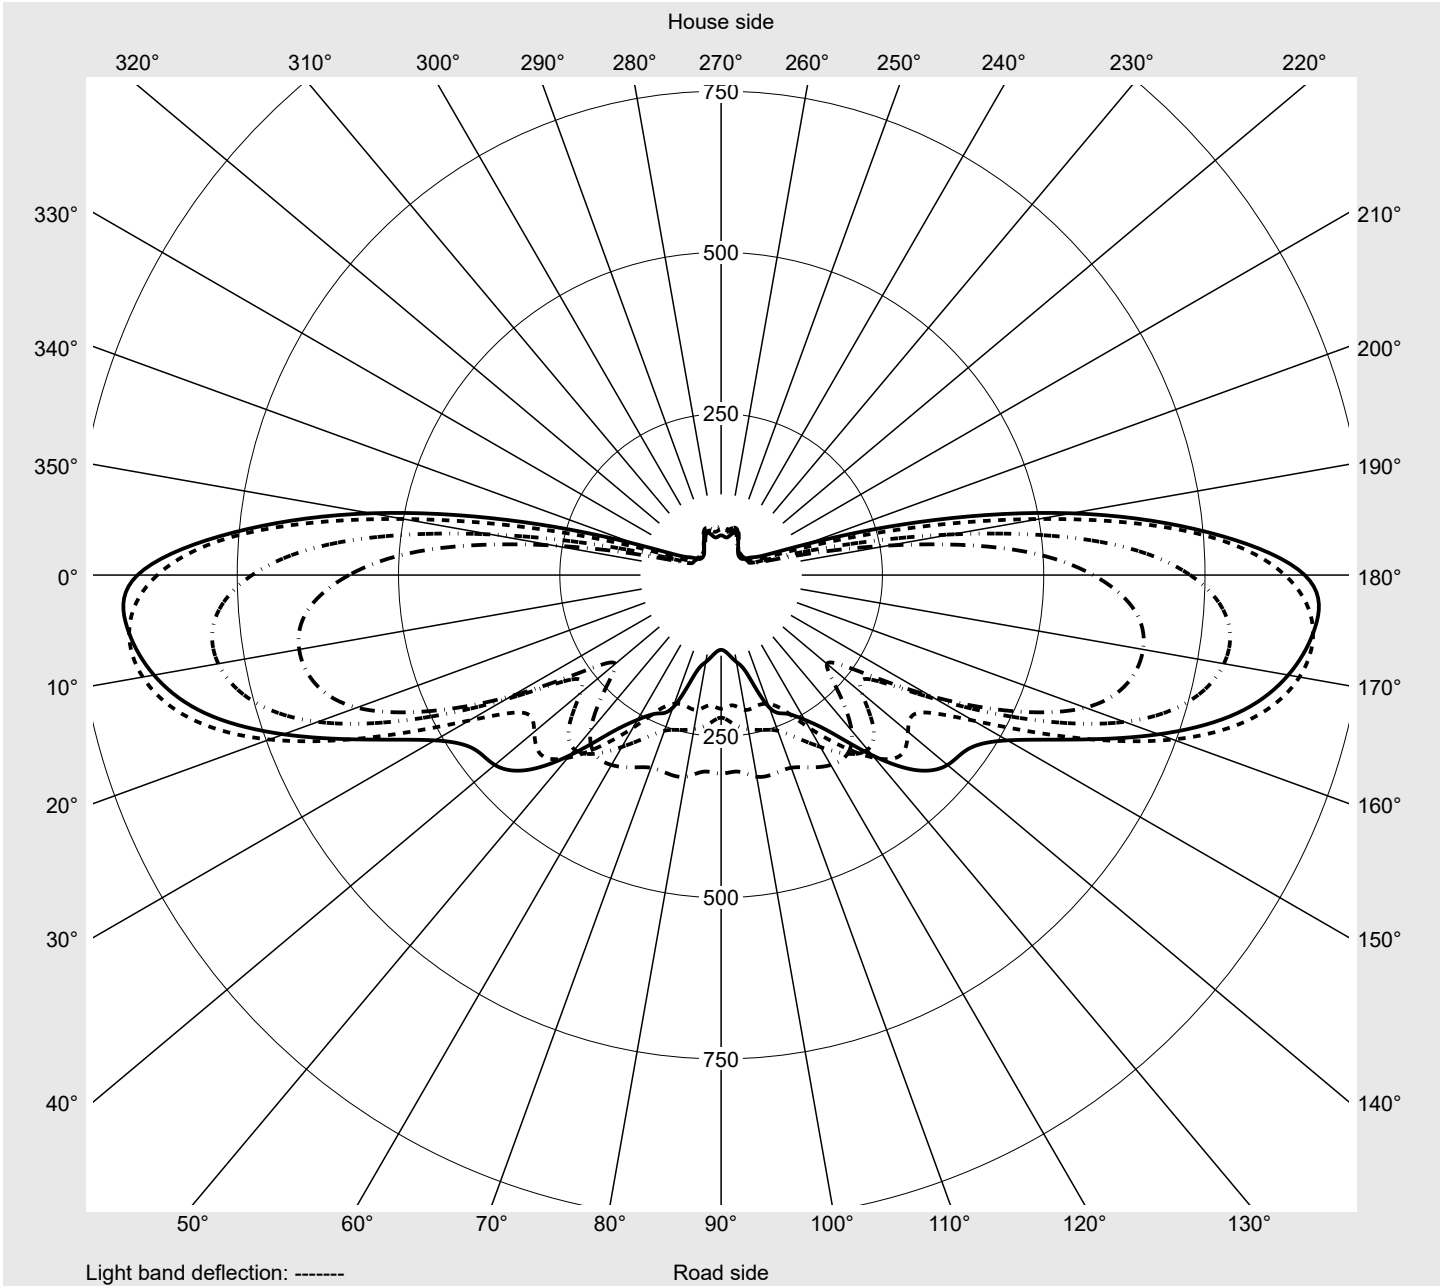

Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
---	--	-------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	204.1	205.9	207.6	209.4	211.0	212.6	214.0	215.5	216.8	218.0	219.2	220.1	221.1
5,0°	204.3	208.1	211.7	215.1	218.3	221.3	224.0	226.5	228.6	230.5	232.2	233.5	234.7
7,5°	204.7	210.6	216.0	220.8	225.0	228.8	232.0	234.9	237.1	239.0	240.7	242.0	243.1
10,0°	206.2	213.9	220.8	226.7	231.6	235.7	239.0	241.6	243.4	245.1	246.3	247.5	248.5
12,5°	208.1	217.6	225.8	232.8	238.2	242.2	245.2	247.4	249.0	250.5	251.6	252.7	253.8
15,0°	209.8	221.1	230.6	238.4	244.1	248.1	251.0	253.2	254.7	256.3	257.5	258.9	260.4
17,5°	211.4	224.8	235.6	244.3	250.3	254.1	257.1	259.4	261.3	263.4	265.0	266.9	268.9
20,0°	214.1	230.8	243.7	252.6	257.5	260.6	263.4	265.7	268.2	270.9	273.6	276.5	279.0
22,5°	216.2	235.1	249.5	259.0	263.9	267.5	270.6	273.8	276.7	280.5	284.6	288.8	292.0
25,0°	219.3	240.0	255.4	265.5	271.3	275.6	279.2	282.8	286.7	291.7	297.1	302.3	305.5
27,5°	224.9	248.4	265.4	276.0	282.4	286.8	290.4	294.3	299.5	305.6	311.0	314.3	315.2
30,0°	231.8	258.3	277.3	288.5	295.5	300.5	304.4	308.1	312.6	317.6	320.2	319.2	314.6
32,5°	240.0	270.2	291.6	303.6	311.4	317.0	321.3	325.1	327.0	326.0	322.4	315.3	304.8
35,0°	251.0	285.3	309.0	322.8	331.8	337.8	341.8	343.9	340.7	330.8	318.4	305.6	290.0
37,5°	264.8	303.9	330.0	345.6	355.4	362.0	364.9	361.5	349.7	331.0	310.0	292.0	270.3
40,0°	282.0	327.0	356.1	372.8	383.3	389.8	391.1	379.8	355.4	325.3	296.0	267.5	238.5
42,5°	299.1	349.3	381.5	400.1	410.6	416.3	412.2	389.5	350.3	306.4	265.4	228.3	197.1
45,0°	316.6	369.4	401.3	419.1	428.3	430.6	416.6	381.3	333.5	281.9	233.9	194.2	165.1
47,5°	340.2	396.4	429.6	445.6	453.0	449.8	423.6	375.7	317.5	257.6	204.8	168.1	148.1
50,0°	369.6	428.3	461.1	474.4	477.4	463.0	422.5	363.0	295.4	230.2	181.3	159.0	162.0
52,5°	401.9	463.3	494.2	504.2	500.7	470.9	414.9	342.7	265.8	202.0	174.5	186.1	216.1
55,0°	441.1	505.3	534.1	538.4	524.1	476.3	403.0	316.4	233.2	186.7	198.5	241.5	284.7
57,5°	496.4	564.0	588.7	584.0	554.2	482.5	388.1	284.4	206.9	201.3	252.0	305.4	339.5
60,0°	576.7	644.3	664.1	651.1	600.9	499.1	374.5	259.3	214.2	257.9	314.6	339.9	339.9
62,5°	727.1	787.6	791.4	752.3	665.5	530.0	385.4	281.8	285.1	333.6	353.2	337.8	307.7
65,0°	873.9	920.6	910.3	854.1	745.2	594.1	451.0	372.6	378.1	394.2	369.9	322.8	273.7
67,5°	904.6	924.4	892.6	827.7	721.6	603.3	512.4	469.0	457.9	427.6	364.8	298.4	259.0
70,0°	692.3	683.4	640.8	616.3	574.3	530.6	499.4	482.0	461.6	395.0	327.5	275.1	237.3
72,5°	304.0	238.3	203.0	260.5	362.4	384.3	380.7	369.4	325.3	266.7	227.4	180.7	147.1
75,0°	64.8	47.4	44.1	55.4	144.8	194.0	196.1	169.5	92.1	70.4	94.1	71.8	61.3
77,5°	36.5	33.7	33.3	31.6	45.4	59.9	56.3	31.9	26.4	27.1	33.5	31.7	28.1
80,0°	30.4	27.3	26.5	25.1	23.1	23.0	20.7	17.5	16.7	16.2	16.3	19.2	19.4
82,5°	16.5	15.6	16.7	16.1	13.7	12.7	11.6	10.0	9.6	9.3	8.7	9.1	10.2
85,0°	6.6	6.6	7.3	7.3	6.4	5.7	5.0	4.6	4.2	3.8	3.5	3.2	3.1
87,5°	2.2	2.3	2.2	2.2	2.0	1.8	1.6	1.4	1.3	1.1	1.1	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	222.0	222.8	223.4	224.0	224.3	227.3	202.3	200.6	198.8	197.0	195.2	193.6	192.1
5,0°	235.9	236.9	237.7	238.2	238.6	238.9	200.4	196.6	192.6	188.6	184.7	181.0	177.5
7,5°	244.1	244.8	245.4	245.9	246.3	247.2	198.9	192.9	186.6	180.5	174.3	168.5	162.8
10,0°	249.5	250.1	250.7	251.1	251.6	252.1	198.3	190.0	181.6	173.1	164.7	156.5	148.6
12,5°	254.9	255.9	256.5	257.0	257.6	258.5	198.0	187.5	176.9	166.2	155.4	144.9	134.5
15,0°	261.9	263.3	264.4	265.2	266.0	266.2	197.5	184.7	171.8	159.0	146.2	133.6	121.7
17,5°	271.0	273.0	274.7	275.9	276.8	278.8	196.5	181.1	165.7	150.7	135.6	121.7	109.2
20,0°	281.5	283.8	286.0	287.6	288.8	288.5	195.8	177.8	159.7	141.9	125.1	110.6	98.7
22,5°	294.3	296.3	298.4	300.3	301.5	303.6	195.4	174.3	153.3	132.9	114.7	100.2	87.9
25,0°	306.5	306.1	306.6	307.9	308.7	309.1	196.0	171.7	147.3	124.8	105.3	89.2	76.0
27,5°	312.0	306.2	303.2	303.4	303.1	300.7	197.9	169.9	141.7	116.5	94.3	76.2	68.3
30,0°	305.5	293.7	287.1	285.4	282.4	282.6	201.2	169.1	137.0	108.7	81.8	68.5	65.3
32,5°	289.9	273.0	262.8	257.1	249.5	243.0	204.8	168.2	131.9	98.7	72.2	65.3	63.6
35,0°	268.4	245.7	231.9	220.0	208.5	209.7	210.4	168.0	126.5	87.6	66.8	63.4	62.1
37,5°	242.5	214.8	198.3	180.4	168.5	167.6	217.5	168.0	118.2	76.7	63.6	61.4	60.4
40,0°	206.1	177.7	162.1	141.9	133.3	135.1	227.3	169.5	107.3	68.2	60.9	59.3	58.5
42,5°	170.8	149.5	133.4	119.3	114.5	113.1	236.5	170.2	97.2	63.0	58.3	57.1	56.4
45,0°	145.3	128.7	118.9	111.2	108.8	108.8	248.1	172.9	92.0	60.1	56.3	55.1	54.2
47,5°	142.0	138.1	139.0	141.9	143.6	153.7	264.5	178.3	89.3	58.1	54.7	53.4	52.4
50,0°	178.8	195.0	206.9	220.9	226.9	224.5	286.8	186.2	88.9	56.5	53.1	51.7	50.8
52,5°	247.7	273.0	293.1	311.6	317.7	321.5	311.7	194.2	88.9	55.1	51.5	50.2	49.2
55,0°	320.9	344.4	359.9	372.8	371.0	371.4	343.0	206.1	91.2	54.2	50.0	48.7	47.8
57,5°	355.1	358.8	363.7	367.9	359.6	358.6	386.1	224.8	96.0	53.6	48.6	47.1	46.5
60,0°	328.9	317.8	318.6	317.3	305.8	307.7	453.8	263.3	108.8	54.4	47.4	46.0	45.4
62,5°	278.5	256.8	248.5	242.4	232.3	221.1	590.3	362.7	154.6	61.6	47.4	45.6	44.5
65,0°	231.6	212.4	210.3	212.2	202.7	207.2	740.4	500.4	255.9	94.5	53.9	47.0	43.6
67,5°	236.9	218.5	160.4	136.8	122.6	115.9	758.3	551.2	317.3	138.6	70.9	54.8	43.8
70,0°	212.7	183.9	65.2	48.9	46.2	50.5	337.4	322.6	227.0	124.9	74.3	60.0	45.2
72,5°	128.8	109.5	39.2	34.3	33.8	31.2	126.8	73.2	68.7	66.6	49.6	46.1	37.0
75,0°	60.8	58.1	29.6	25.8	25.1	24.1	57.8	34.5	34.5	35.0	31.4	29.8	27.8
77,5°	27.9	27.5	20.6	18.4	17.7	15.6	32.8	27.6	25.4	24.2	22.8	21.4	20.4
80,0°	15.8	14.4	12.7	11.6	10.7	10.4	27.2	20.6	17.6	16.6	16.8	14.6	13.9
82,5°	8.2	7.7	6.9	6.4	5.9	5.7	15.1	12.9	10.8	10.2	12.6	8.6	8.3
85,0°	2.8	2.6	2.5	2.4	2.4	2.5	6.7	5.9	5.4	4.9	5.2	4.3	4.0
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	2.2	2.1	2.1	2.0	1.9	1.7	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	0.3	0.3
2,5°	190.7	189.5	188.2	187.3	186.4	185.7	185.3	184.9	184.7	184.2	184.4	2.4	2.7
5,0°	174.2	171.1	168.2	165.7	163.5	161.5	160.0	158.7	158.0	157.2	157.1	4.8	7.5
7,5°	157.4	152.4	147.7	143.5	139.8	136.6	134.0	132.1	130.6	129.5	129.2	7.0	14.6
10,0°	141.0	133.8	127.2	121.6	116.8	112.7	109.5	107.0	105.2	104.0	103.6	9.1	23.6
12,5°	124.9	116.3	108.4	101.9	96.7	92.6	89.5	87.2	85.7	84.7	84.4	11.1	34.7
15,0°	111.0	101.7	94.1	87.9	83.1	79.5	76.8	74.9	73.4	72.5	72.2	13.1	47.8
17,5°	98.8	89.9	81.4	74.6	69.9	66.9	65.0	63.8	62.9	62.3	62.1	15.1	62.9
20,0°	88.4	77.5	70.9	67.1	64.5	62.6	61.2	60.2	59.5	59.0	58.8	17.3	80.2
22,5°	76.3	69.9	66.6	64.8	63.1	61.6	60.2	59.1	58.3	57.7	57.4	19.6	99.8
25,0°	69.3	66.4	65.2	64.1	62.8	61.4	60.0	58.7	57.7	56.9	56.6	22.0	121.8
27,5°	65.8	64.8	64.3	63.8	62.9	61.7	60.1	58.5	57.1	56.0	55.5	24.3	146.0
30,0°	64.3	63.9	63.8	63.7	63.1	61.8	59.7	57.6	55.7	54.4	53.7	26.3	172.3
32,5°	63.0	63.0	63.3	63.3	62.5	60.8	58.6	56.5	54.5	52.9	52.1	28.1	200.4
35,0°	61.7	61.9	62.1	61.9	61.1	59.8	58.0	56.0	54.2	52.6	51.7	29.6	230.1
37,5°	60.1	60.2	60.2	60.2	59.8	58.9	57.1	55.0	53.0	51.3	50.3	31.0	261.1
40,0°	58.2	58.0	58.2	58.3	58.3	57.1	55.3	53.4	51.5	49.8	48.8	32.2	293.3
42,5°	55.8	55.8	56.0	56.3	55.9	54.8	53.5	52.1	50.5	48.8	47.7	33.2	326.5
45,0°	53.7	53.6	53.8	53.6	53.2	52.8	52.1	51.0	49.6	47.8	46.7	34.0	360.6
47,5°	51.9	51.7	51.5	51.0	51.2	51.2	50.9	50.5	49.3	47.6	46.6	36.3	396.9
50,0°	50.2	49.9	49.1	49.1	49.6	49.9	50.6	50.8	50.1	48.8	47.9	40.4	437.3
52,5°	48.7	48.0	47.6	47.7	48.4	49.9	51.9	53.2	52.9	52.1	51.7	45.7	483.0
55,0°	47.1	46.4	46.5	46.8	48.1	51.1	55.5	58.0	57.9	58.0	58.3	51.3	534.3
57,5°	45.5	45.2	45.8	46.5	48.8	54.1	61.2	64.5	63.9	64.7	65.9	55.9	590.2
60,0°	44.1	44.2	44.9	46.4	50.2	58.1	68.0	71.4	69.3	70.6	72.8	60.0	650.3
62,5°	43.1	43.1	44.1	46.7	52.3	62.6	73.9	76.1	72.0	73.2	75.8	66.5	716.7
65,0°	42.0	41.8	43.2	46.8	53.8	64.8	75.3	75.0	68.6	68.4	70.7	75.8	792.5
67,5°	40.0	39.9	41.4	45.6	52.8	62.1	68.9	66.5	59.7	59.6	61.6	78.1	870.6
70,0°	37.0	36.6	38.1	41.7	48.1	56.1	61.3	58.0	51.5	50.7	52.3	62.2	932.8
72,5°	31.9	31.2	32.8	36.8	42.3	48.1	50.6	46.7	40.8	39.7	41.0	35.6	968.4
75,0°	25.9	25.7	27.4	30.7	34.5	36.9	36.2	32.6	28.4	27.5	28.4	15.4	983.8
77,5°	19.9	19.9	20.7	22.3	24.1	25.7	25.4	22.7	20.1	19.4	20.0	7.4	991.2
80,0°	13.4	13.2	13.7	14.6	14.9	15.2	14.8	13.1	11.7	11.3	11.4	4.7	995.9
82,5°	7.9	7.6	7.7	7.6	7.7	7.7	7.1	6.1	5.5	5.4	5.4	2.6	998.5
85,0°	3.6	3.4	3.1	2.9	2.6	2.4	2.2	2.2	2.1	2.1	2.0	1.1	999.6
87,5°	1.5	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.1	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779415C01AA
EAN: 4058352607664

LP number
59236_20

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	111360	916.8
95	233	105759	838.6
90	215	100202	771.6
85	199	94770	712.7
80	183	88980	653.5
75	169	83559	601.9
70	155	77951	551.2
65	142	72527	504.2
60	129	66939	457.6
55	116	61075	411.7
50	104	55683	368.4
45	92	49946	326.3
40	81	44532	287.6
35	70	39010	248.9
30	59	33308	210.4
25	49	28057	176.2
20	38	22070	138.7
15	28	16580	104.9
10	18	10918	71.2
5	9	5690	41.3
1	2	1542	16.8

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
91	215	96689	766.2
90	211	95486	751.3
85	194	90097	688.6
80	179	84949	633.8
75	164	79466	579.1
70	151	74425	531.9
65	137	68817	481.9
60	125	63826	439.2
55	113	58529	396.7
50	101	53299	354.6
45	89	47660	312.6
40	78	42364	274.4
35	67	36973	235.8
30	57	31860	201.4
25	47	26627	167.4
20	37	21273	133.8
15	27	15857	100.3
10	18	10815	70.4
5	8	5053	37.5
1	2	1530	16.6

Photometric test report

Family Floodlight FL11	Order number: 5XA779415C01AA EAN: 4058352607664	LP number 59236_20
----------------------------------	--	------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	111360.0	916.8
25.0	96910.0	769.0